
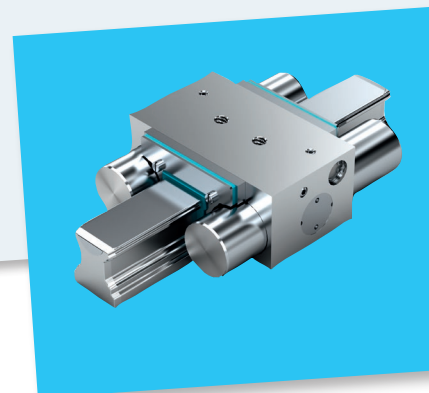
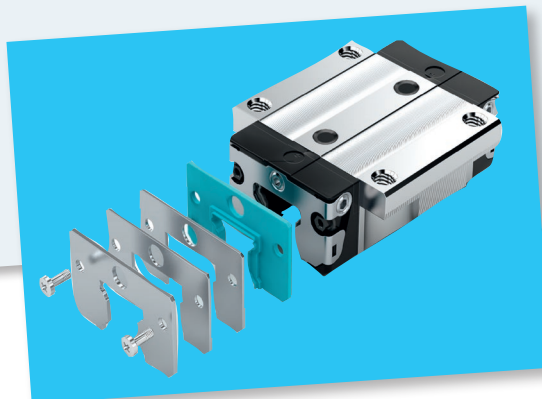
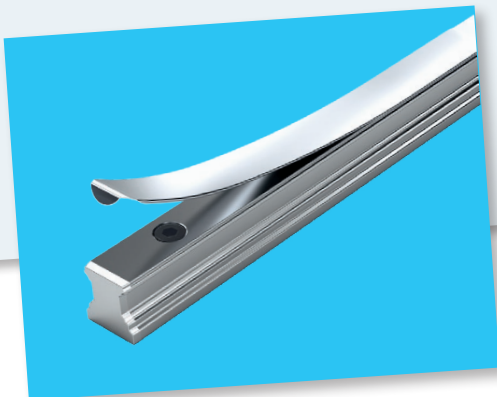


# Ball rail systems High Precision BSHP

Ball runner blocks, ball guide rails, accessories

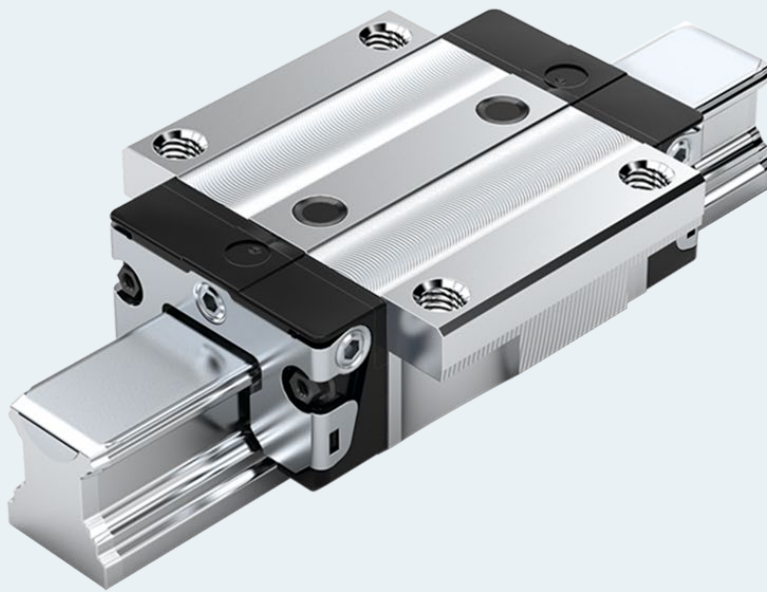

|                                                                                |           |                                                            |            |
|--------------------------------------------------------------------------------|-----------|------------------------------------------------------------|------------|
| <b>Contents</b>                                                                | <b>2</b>  | <b>Heavy-duty ball runner block BSHP made of steel</b>     | <b>74</b>  |
| New features at a glance                                                       | 4         | FLS – Flange, long, standard height,                       | 76         |
| <b>General product information</b>                                             | <b>4</b>  | SNS – Slimline, normal, standard height,                   | 78         |
| New features at a glance                                                       | 4         | SLS – Slimline, long, standard height,                     | 80         |
| Product description                                                            | 6         | SNH – Slimline, normal, high,                              | 82         |
| Notes                                                                          | 8         | SLH – Slimline, long, high,                                | 84         |
| Selection of a linear guide according to DIN 637                               | 10        | <b>High-speed ball runner block BSHP made of steel</b>     | <b>86</b>  |
| Product overview ball runner blocks with load capacities and load moments      | 12        | FNS, FLS, SNS, SLS                                         | 87         |
| Product overview ball guide rails with rail lengths                            | 16        | <b>Super ball runner block made of steel</b>               | <b>88</b>  |
| General technical data and calculations                                        | 18        | FKS – Flange, short, standard height                       | 90         |
| Format and version                                                             | 26        | SKS – Slimline, short, standard height                     | 92         |
| Format and version                                                             | 26        | <b>Aluminum ball runner block BSHP</b>                     | <b>94</b>  |
| System preload                                                                 | 30        | FNS – Flange, normal, standard height,                     | 96         |
| Rigidity ball runner block                                                     | 32        | SNS – Slimline, normal, standard height,                   | 98         |
| Accuracy classes                                                               | 34        | <b>Ball runner block BSHP Resist NR</b>                    | <b>100</b> |
| Ball chain                                                                     | 37        | FNS, FLS, FKS, SNS, SLS, SKS                               | 101        |
| Seals                                                                          | 37        | <b>Ball runner block BSHP Resist NR II</b>                 | <b>102</b> |
| Materials                                                                      | 38        | FNS, FLS, FKS, SNS, SLS, SKS                               | 104        |
| <b>Product description High-precision ball runner block BSHP made of steel</b> | <b>40</b> | <b>Ball runner block BSHP Resist CR</b>                    | <b>106</b> |
| Comparison                                                                     | 41        | FNS, FLS, SNS, SLS, SNH, SLH, FNN, FKN, SNN, SKN, FKS, SKS | 108        |
| Application examples                                                           | 47        | <b>Standard ball guide rails made of steel</b>             | <b>110</b> |
| Overview of formats                                                            | 48        | Ordering guide rails in the recommended rail lengths       | 111        |
| <b>Standard ball runner block BSHP made of steel</b>                           | <b>48</b> | SNS/SNO with cover strip and strip clamps                  | 112        |
| Ordering example                                                               | 49        | SNS/SNO with cover strip and protective caps               | 114        |
| FNS – Flange, normal, standard height                                          | 50        | SNS/SNO with plastic caps                                  | 116        |
| FLS – Flange, long, standard height                                            | 52        | SNS with caps made of steel                                | 118        |
| FKS – Flange, short, standard height                                           | 54        | SNS for bolting from below                                 | 120        |
| SNS – Slimline, normal, standard height                                        | 56        | <b>Standard ball guide rails Resist NR II</b>              | <b>122</b> |
| SLS – Slimline, long, standard height                                          | 58        | Ball guide rails Resist NR II                              | 123        |
| SKS – Slimline, short, standard height                                         | 60        | <b>Standard ball guide rails Resist CR</b>                 | <b>124</b> |
| SNH – Slimline, normal, high                                                   | 62        | Ball guide rails Resist CR                                 | 125        |
| SLH – Slimline, long, high                                                     | 64        |                                                            |            |
| FNN – Flange, normal, low                                                      | 66        |                                                            |            |
| FKN – Flange, short, low                                                       | 68        |                                                            |            |
| SNN – Slimline, normal, low                                                    | 70        |                                                            |            |
| SKN – Slimline, short, low                                                     | 72        |                                                            |            |
| FNS – Flange, normal, standard height,                                         | 74        |                                                            |            |


|                                                                |            |                                                |            |
|----------------------------------------------------------------|------------|------------------------------------------------|------------|
| <b>Standard ball guide rails with temperature control</b>      | <b>126</b> | Pneumatic clamping and braking units MBPS      | 184        |
|                                                                |            | Pneumatic clamping and braking units UBPS      | 186        |
| <b>Wide ball rail systems BSHP made of steel and Resist CR</b> | <b>128</b> | Pneumatic clamping units                       | 188        |
| BNS – Wide, normal, standard height                            | 130        | Pneumatic clamping units MK                    | 190        |
| BNS – Wide, normal, standard height                            | 132        | Pneumatic clamping units MKS                   | 192        |
| CNS – Compact, normal, standard height                         | 134        | Pneumatic clamping units LCP                   | 194        |
| Ordering guide rails in the recommended rail lengths           | 137        | Pneumatic clamping units LCPS                  | 196        |
| BNS with plastic caps                                          | 138        | Manual clamping units                          | 198        |
| BNS with caps made of steel                                    | 140        | Manual clamping units HK                       | 199        |
| BNS for bolting from below                                     | 141        | Manual clamping units HK                       | 200        |
|                                                                |            | Spacer plate                                   | 201        |
|                                                                |            | Safety instructions clamping and braking units | 202        |
| <b>Accessories for ball runner blocks</b>                      | <b>142</b> | <b>Instructions for mounting</b>               | <b>204</b> |
| Cover plate wiper                                              | 143        | Fastener                                       | 205        |
| Front seal                                                     | 144        | Installation tolerances                        | 216        |
| FKM seal                                                       | 145        | Composite ball guide rails                     | 220        |
| Seal kit                                                       | 146        | Notes on lubrication                           | 222        |
| Lubrication adapter                                            | 147        |                                                |            |
| Lubrication plate                                              | 148        | <b>Lubrication</b>                             | <b>222</b> |
| Lubrication plate G 1/8                                        | 149        | Notes on lubrication                           | 223        |
| Transport lock                                                 | 150        | Lubrication                                    | 224        |
| Front lube units                                               | 152        | Maintenance                                    | 238        |
| Bellows                                                        | 156        |                                                |            |
| Lube nipple, lube fittings, extensions                         | 160        | <b>Further information</b>                     | <b>239</b> |
| <b>Accessories for ball guide rails</b>                        | <b>164</b> |                                                |            |
| Cover strip                                                    | 165        |                                                |            |
| Caps                                                           | 169        |                                                |            |
| Mounting runner block                                          | 170        |                                                |            |
| V-guide                                                        | 172        |                                                |            |
| Cardboard box opener                                           | 173        |                                                |            |
| <b>Clamping and braking units</b>                              | <b>174</b> |                                                |            |
| Hydraulic clamping and braking units                           | 174        |                                                |            |
| Hydraulic clamping and braking units, KBH, FLS                 | 176        |                                                |            |
| Hydraulic clamping and braking units, KBH, SLS                 | 177        |                                                |            |
| Hydraulic clamping units                                       | 178        |                                                |            |
| Hydraulic clamping units KWH, FLS                              | 179        |                                                |            |
| Hydraulic clamping units KWH, SLS                              | 180        |                                                |            |
| Hydraulic clamping units KWH, SLH                              | 181        |                                                |            |
| Pneumatic clamping and braking units                           | 182        |                                                |            |

## New features at a glance


## Runner block and guide rail configurator

With the new configurators, Bosch Rexroth accelerates the selection and configuration of ball runner blocks and ball guide rails. A built-in plausibility check monitors each decision in real time to ensure that the individual configuration can be implemented. Then the selected components can be ordered directly from the Bosch Rexroth eShop.

[Link to the runner block configurator](#)

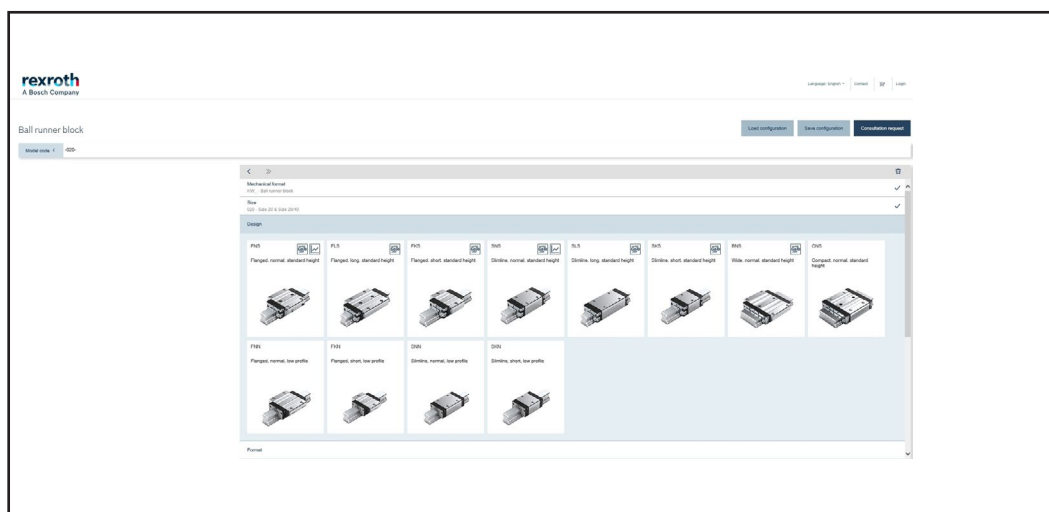


[Link to the runner block configurator](#)

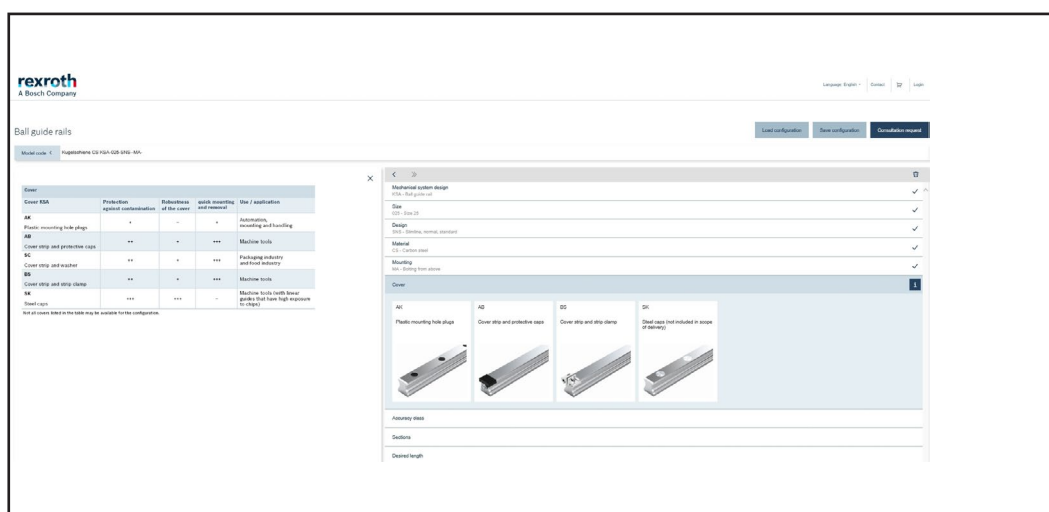



## Temperature-controlled rail

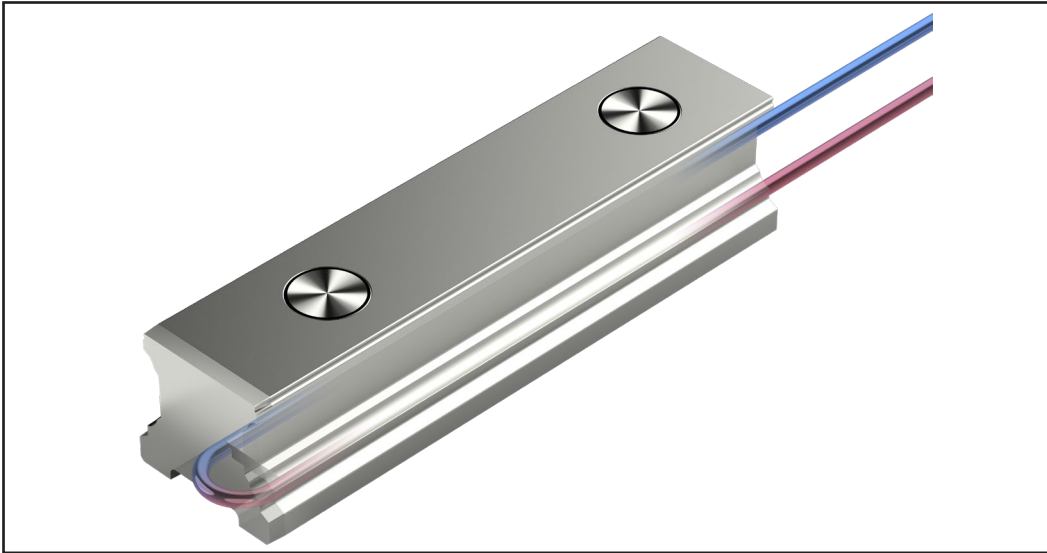


## Extension of relubrication intervals for grease lubrication

The latest investigations in the Bosch Rexroth testing prove that under certain operating conditions, significantly longer relubrication intervals are possible with grease lubrication. If small loads, normal ambient temperatures and medium to high travel speeds are present, up to 20,000 km can be realized without relubrication in ball rail systems. This enormous increase has been made possible by continuous improvements in the manufacturing processes for runner blocks and guide rails, which have resulted in better surfaces and higher geometrical dimensional accuracy of the running tracks.

## Mounting runner block

Mounting runner block for high-precision parallel alignment and joint alignment of multi-piece ball guide rails.

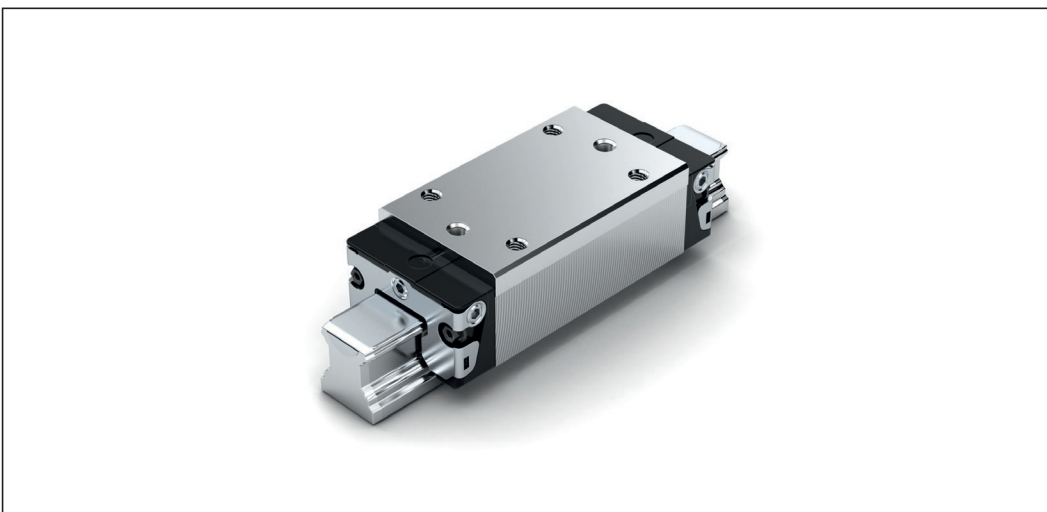

# Product description

## Characteristic features

### Complete guide units can also be designed by combining interchangeable elements from stock

Rexroth manufactures ball guide rails and ball runner blocks especially for the ball raceway sector with such high precision that each individual component element is fully interchangeable. As a result, any combination is possible within each accuracy class. This enables globally unique, premium logistics. Each element can be individually planned and separately stocked.

On ball guide rails, both sides can be used as reference edges.

## Highlights

- ▶ The same high load capacities in all four main directions of loading
- ▶ Minimal noise level and optimum travel behavior
- ▶ Excellent dynamic characteristics:  
Travel speed:  $v_{\max}$  up to 10 m/s  
Acceleration:  $a_{\max} = 500 \text{ m/s}^2$
- ▶ Long-term lubrication is possible over several years
- ▶ Minimum quantity lubrication system with integrated reservoir for oil lubrication<sup>1)</sup>
- ▶ Lube fittings with metal threads on all sides<sup>1)</sup>
- ▶ Limitless interchangeability as all ball guide rail versions can be combined at will with all ball runner block versions
- ▶ Maximum system rigidity due to preloaded O-arrangement
- ▶ Maximum installation error compensation with super ball runner blocks
- ▶ 60% less weight with aluminum ball runner blocks (compared to steel ball runner blocks)

## Further highlights

- ▶ Interchangeability with roller rail system
- ▶ Optional integrated, inductive and wear-free measuring system
- ▶ Wide range of accessories
- ▶ Attachments on the ball runner block can be mounted from above and below<sup>1)</sup>
- ▶ Improved rigidity under lift-off and side loading conditions due to two additional mounting screw holes at the center of the ball runner block<sup>1)</sup>
- ▶ End-face fastening thread for all attachments
- ▶ High rigidity in all directions of loading – permits applications with just one runner block per rail
- ▶ Integrated all-round sealing
- ▶ High torque load capacity
- ▶ Optimized entry-zone geometry and high number of balls minimize variation in elastic deflection
- ▶ Quiet, smooth running thanks to optimally designed ball and ball chain return and guideway
- ▶ Different preload classes

## Corrosion protection (optional)<sup>1)</sup>

- ▶ Resist NR: Ball runner block body made of corrosion-resistant steel as per DIN EN 10088
- ▶ Resist NR II: Ball runner block body and ball guide rail as well as all steel parts made of corrosion-resistant steel in accordance with DIN EN 10088
- ▶ Resist CR: Ball runner block body or ball guide rail made of steel with corrosion-resistant coating, matte-silver finish, hard chrome plated

1) Type-dependent

**Ball chain (optional)**

- ▶ Optimized noise level

**Proven cover strip for the ball guide rail fastening bores**

- ▶ One cover for all bore holes saves time and costs
- ▶ Made of corrosion-resistant spring steel  
DIN EN 10088
- ▶ Easy and safe during mounting
- ▶ Clip on and secure



Separate catalogs are available for other products in the field of ball rail systems:



Integrated measuring system  
IMS for ball and roller rail  
systems



Integrated measuring system  
IMScompact for ball rail  
systems BSHP



Miniature ball rail systems



Ball rail systems NRFG  
for use in the packaging  
industry and food  
industry areas.



Cam roller guides



The ball rail system  
Compact Line

# Notes

## General notes

- Combinations of different accuracy classes  
Combining ball guide rails and ball runner blocks of different accuracy classes results in different tolerances for the dimensions H and A3. See "Accuracy classes and their tolerances."

## Intended use

- The ball rail systems are linear guideways capable of absorbing forces from all transverse directions and moments about all axes. The ball rail system is intended exclusively for guiding and positioning tasks when installed in a machine.
- The product is intended exclusively for professional use and not for private use.
- Use for the intended purpose also includes the requirement that users must have read and understood the related documentation completely, in particular the "Safety instructions".

## Misuse

Use of the product in any other way than as described under "Intended use" is considered to be misuse and is therefore not permitted. If unsuitable products are installed or used in safety-critical applications, this may lead to uncontrolled operating statuses in the application which can cause personal injury and/or damage to property.

The product may only be used in safety-critical applications if this use has been expressly specified and permitted in the product documentation.

Bosch Rexroth AG will not accept any liability for injury or damage caused by misuse of the product. The risks associated with any misuse of the product shall be borne by the user alone.

Misuse of the product includes:

- The transport of persons

## General safety instructions

- The safety rules and regulations of the country in which the product is used must be observed.
- All current and applicable accident prevention and environmental regulations must be adhered to.
- The product may only be used when it is in technically perfect condition.
- The technical data and environmental conditions stated in the product documentation must be complied with.
- The product must not be put into service until it has been verified that the final product (for example a machine or system) into which the product has been installed complies with the country-specific requirements, safety regulations and standards for the application.
- Rexroth ball rail systems may not be used in zones with potentially explosive atmospheres as defined in ATEX directive 94/9/EC.
- Rexroth ball rail systems must never be altered or modified. The user may only perform the work described in the "Quick User Guide" or the "Mounting instructions for ball rail systems".
- The product is never allowed to be disassembled.
- At high travel speeds a certain amount of noise is caused by the product. If necessary, appropriate measures should be taken to protect hearing.
- The special safety requirements for specific sectors (e.g. crane construction, theaters, food technology) set forth in laws, directives and standards must be complied with.
- In all cases, the provisions of the following standard should be noted and followed. DIN 637, Safety regulations for dimensioning and operation of Profiled Rail Systems with recirculating rolling elements.

## Directives and standards

Rexroth ball rail systems BSHP are designed for reliability and high precision in dynamic, linear applications. The machine tool industry and other sectors must observe a series of standards and directives. These requirements can vary significantly worldwide. It is therefore essential to understand the legislation and standards that apply in each particular region.

### **DIN EN ISO 12100**

This standard describes the safety of machinery – general principles for design, risk assessment and risk reduction. It gives a general overview and contains a guide to the major developments governing machines and their intended use.

### **Directive 2006/42/EC**

The European Machinery Directive describes the basic safety and health requirements for the structural design and manufacture of machinery. The manufacturer of a machine or his authorized representative has a duty to ensure that a risk assessment has been performed in order to determine the health and safety requirements which have to be fulfilled for that machine. The machine must be designed and built taking into account the results of the risk assessment.

### **Directive 2001/95/EC**

This directive covers general safety requirements for any product placed on the market and intended for consumers, or likely to be used by consumers under reasonably foreseeable conditions, including products that are made available to consumers in the context of service provision for use by them


### **Directive 1999/34/EC**

This directive concerns the liability for defective products and applies to industrially manufactured movable objects, irrespective of whether or not they have been incorporated into another movable or immovable object.

### **REGULATION (EC) No. 1907/2006 (REACH)**


This directive describes the restrictions on the marketing and use of certain dangerous substances and preparations. "Substances" means chemical elements and their compounds as they occur in the natural state or as produced by industry. "Preparations" means mixtures or solutions composed of two or more substances.

# Selection of a linear guide according to DIN 637

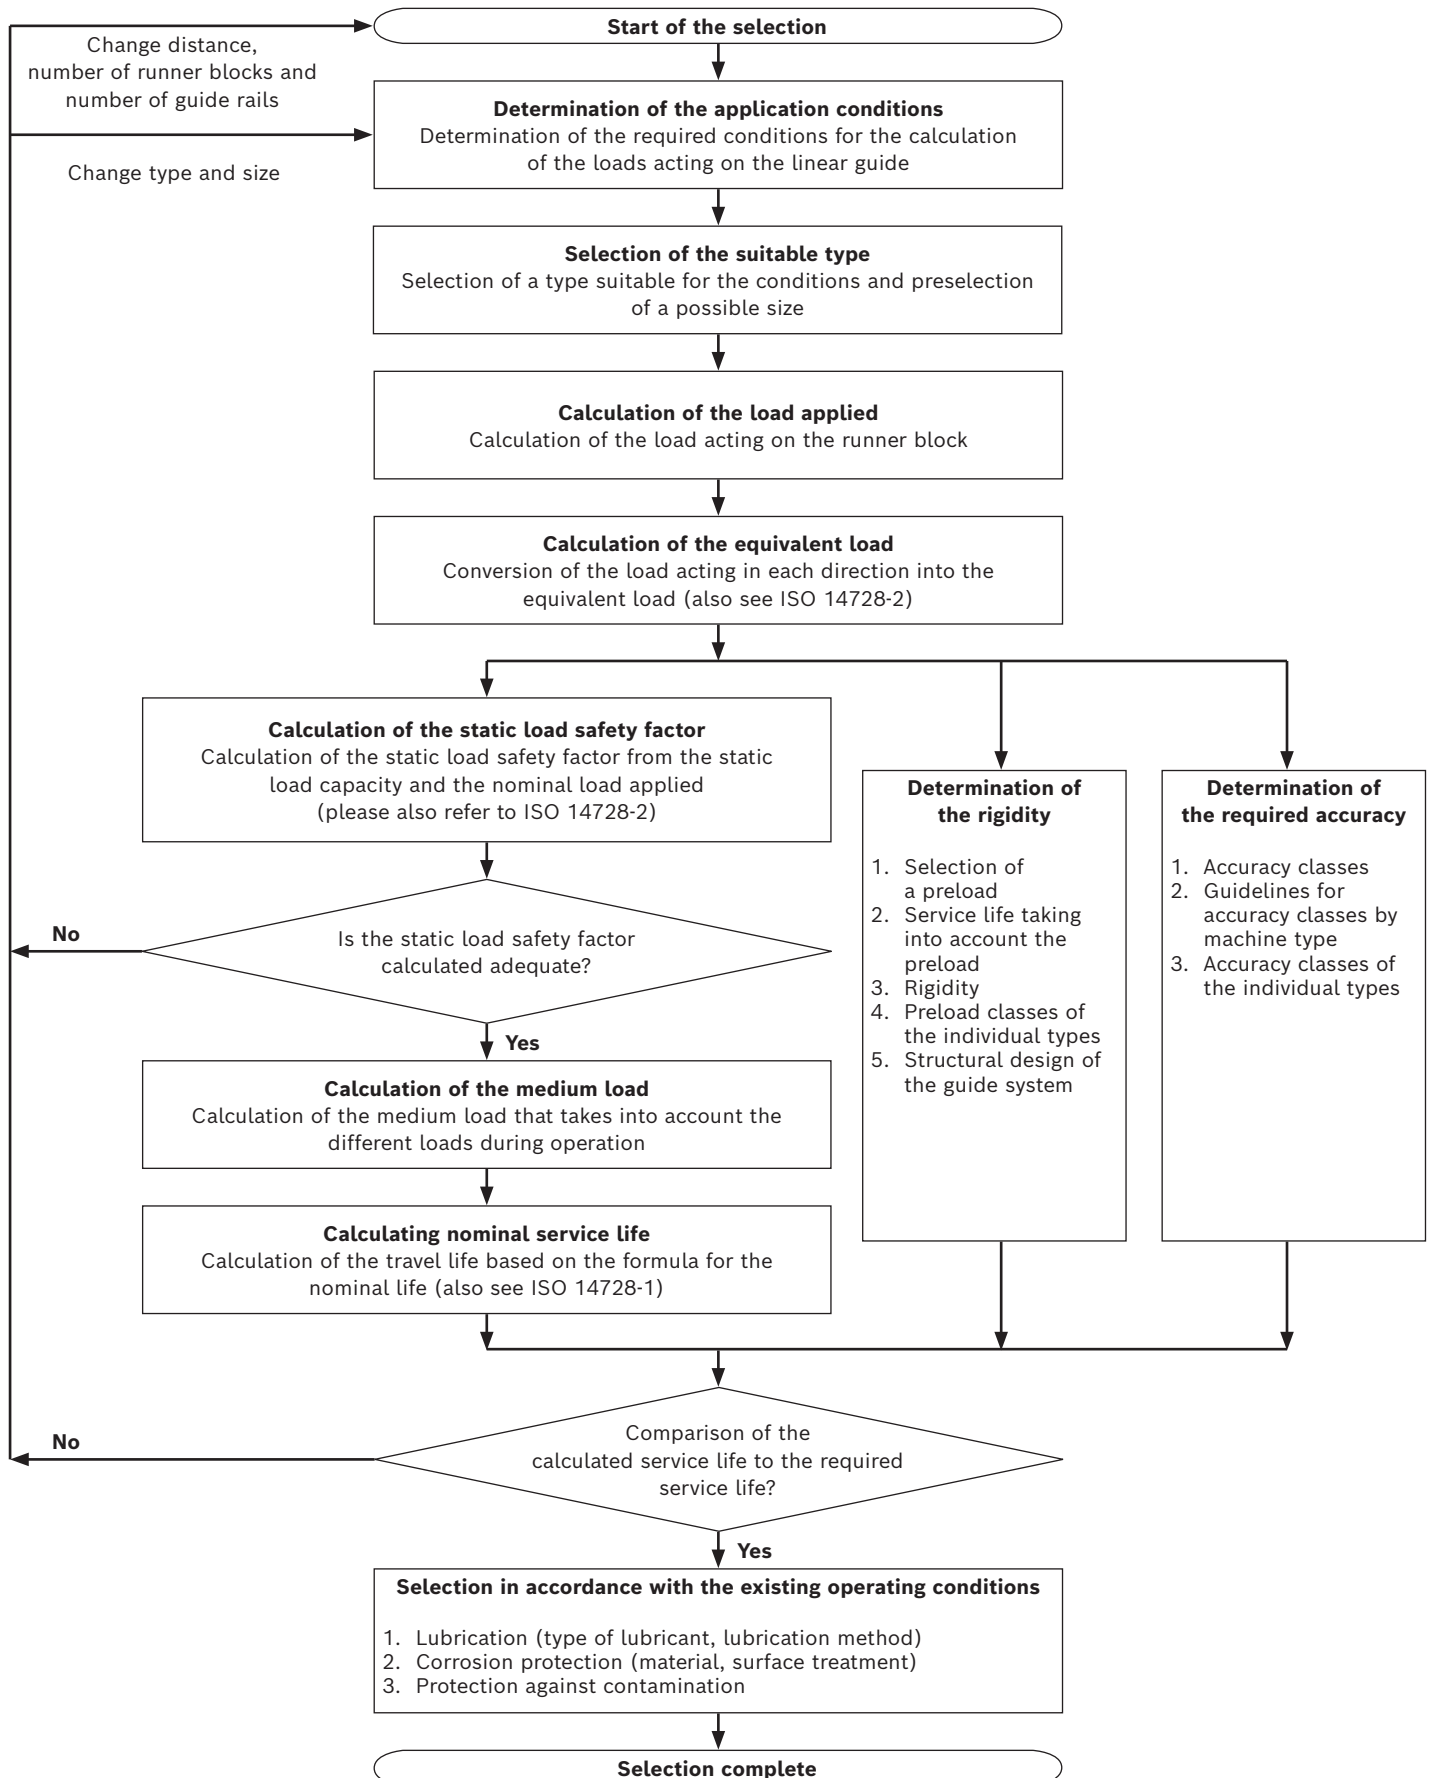



# Product overview ball runner blocks with load capacities and load moments

| Ball runner blocks                                                                                                                            |                                                                                     |                                                       | Page                                  |                    | Size                                                                              | 15                                        | 20      | 25      | 30      | 35      | 45      | 55      | 65      |
|-----------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------|---------------------------------------|--------------------|-----------------------------------------------------------------------------------|-------------------------------------------|---------|---------|---------|---------|---------|---------|---------|
|                                                                                                                                               |                                                                                     |                                                       |                                       |                    |  | Load capacities (N) and load moments (Nm) |         |         |         |         |         |         |         |
| Standard, heavy-duty, ball runner blocks <sup>7)</sup><br>made of steel <sup>3)</sup><br>Resist NR <sup>(4)</sup><br>Resist CR <sup>(6)</sup> |    | FNS<br>R1651 <sup>(3)6)</sup><br>R2001 <sup>(4)</sup> | 48 <sup>3)</sup><br>99 <sup>(4)</sup> | 106 <sup>(6)</sup> | C 1)                                                                              | 9 860                                     | 23 400  | 28 600  | 36 500  | 51 800  | 86 400  | 109 000 | 172 000 |
|                                                                                                                                               |                                                                                     |                                                       |                                       |                    | C 2)                                                                              | 8 850                                     | 22 200  | 26 700  | 34 800  | 49 400  | 82 400  | –       | –       |
|                                                                                                                                               |                                                                                     | C <sub>0</sub> 1)                                     | 12 700                                | 29 800             | 35 900                                                                            | 48 100                                    | 80 900  | 132 000 | 174 000 | 280 000 | –       | –       |         |
|                                                                                                                                               |                                                                                     | C <sub>0</sub> 2)                                     | 10 800                                | 27 700             | 32 300                                                                            | 44 700                                    | 75 200  | 123 000 | –       | –       | –       | –       |         |
|                                                                                                                                               |                                                                                     | M <sub>t</sub> 1)                                     | 95                                    | 300                | 410                                                                               | 630                                       | 1 110   | 2 330   | 3 480   | 6 810   | –       | –       |         |
|                                                                                                                                               |                                                                                     | M <sub>t</sub> 2)                                     | 85                                    | 280                | 380                                                                               | 600                                       | 1 060   | 2 220   | –       | –       | –       | –       |         |
|                                                                                                                                               |    | SNS<br>R1622 <sup>(3)6)</sup><br>R2011 <sup>(4)</sup> | 54 <sup>3)</sup><br>99 <sup>(4)</sup> | 106 <sup>(6)</sup> | M <sub>t0</sub> 1)                                                                | 120                                       | 380     | 510     | 830     | 1 740   | 3 560   | 5 550   | 11 100  |
|                                                                                                                                               |                                                                                     |                                                       |                                       |                    | M <sub>t0</sub> 2)                                                                | 100                                       | 350     | 460     | 780     | 1 620   | 3 320   | –       | –       |
|                                                                                                                                               |                                                                                     | M <sub>L</sub> 1)                                     | 68                                    | 200                | 290                                                                               | 440                                       | 720     | 1 540   | 2 320   | 4 560   | –       | –       |         |
|                                                                                                                                               |                                                                                     | M <sub>L</sub> 2)                                     | 62                                    | 190                | 270                                                                               | 420                                       | 700     | 1 480   | –       | –       | –       | –       |         |
|                                                                                                                                               |                                                                                     | M <sub>L0</sub> 1)                                    | 87                                    | 260                | 360                                                                               | 580                                       | 1 130   | 2 350   | 3 690   | 7 400   | –       | –       |         |
|                                                                                                                                               |                                                                                     | M <sub>L0</sub> 2)                                    | 76                                    | 240                | 330                                                                               | 540                                       | 1 060   | 2 210   | –       | –       | –       | –       |         |
|                                                                                                                                               |    | FLS<br>R1653 <sup>(3)6)</sup><br>R2002 <sup>(4)</sup> | 50 <sup>3)</sup><br>99 <sup>(4)</sup> | 106 <sup>(6)</sup> | C 1)                                                                              | 12 800                                    | 29 600  | 37 300  | 46 000  | 66 700  | 111 000 | 139 000 | 223 000 |
|                                                                                                                                               |                                                                                     |                                                       |                                       |                    | C 2)                                                                              | 11 500                                    | 28 200  | 34 800  | 43 800  | 63 600  | 106 000 | –       | –       |
|                                                                                                                                               |                                                                                     | C <sub>0</sub> 1)                                     | 18 400                                | 41 800             | 52 500                                                                            | 66 900                                    | 116 000 | 190 000 | 245 000 | 404 000 | –       | –       |         |
|                                                                                                                                               |                                                                                     | C <sub>0</sub> 2)                                     | 15 600                                | 38 800             | 47 300                                                                            | 62 200                                    | 108 000 | 177 000 | –       | –       | –       | –       |         |
|                                                                                                                                               |                                                                                     | M <sub>t</sub> 1)                                     | 120                                   | 380                | 530                                                                               | 800                                       | 1 440   | 3 010   | 4 410   | 8 810   | –       | –       |         |
|                                                                                                                                               |                                                                                     | M <sub>t</sub> 2)                                     | 110                                   | 360                | 500                                                                               | 760                                       | 1 370   | 2 870   | –       | –       | –       | –       |         |
|                                                                                                                                               |    | SLS<br>R1623 <sup>(3)6)</sup><br>R2012 <sup>(4)</sup> | 56 <sup>3)</sup><br>99 <sup>(4)</sup> | 106 <sup>(6)</sup> | M <sub>t0</sub> 1)                                                                | 180                                       | 540     | 750     | 1 160   | 2 500   | 5 120   | 7 780   | 16 000  |
|                                                                                                                                               |                                                                                     |                                                       |                                       |                    | M <sub>t0</sub> 2)                                                                | 150                                       | 500     | 670     | 1 080   | 2 320   | 4 770   | –       | –       |
|                                                                                                                                               |                                                                                     | M <sub>L</sub> 1)                                     | 120                                   | 340                | 530                                                                               | 740                                       | 1 290   | 2 730   | 3 960   | 8 160   | –       | –       |         |
|                                                                                                                                               |                                                                                     | M <sub>L</sub> 2)                                     | 110                                   | 330                | 500                                                                               | 710                                       | 1 230   | 2 630   | –       | –       | –       | –       |         |
|                                                                                                                                               |                                                                                     | M <sub>L0</sub> 1)                                    | 180                                   | 490                | 740                                                                               | 1 080                                     | 2 240   | 4 660   | 6 990   | 14 800  | –       | –       |         |
|                                                                                                                                               |                                                                                     | M <sub>L0</sub> 2)                                    | 150                                   | 460                | 670                                                                               | 1 010                                     | 2 090   | 4 370   | –       | –       | –       | –       |         |
| Standard ball runner blocks <sup>7)</sup><br>made of steel <sup>3)</sup><br>Resist NR <sup>(4)</sup><br>Resist CR <sup>(6)</sup>              |  | FKS<br>R1665 <sup>(3)</sup><br>R2000 <sup>(4)</sup>   | 52 <sup>3)</sup><br>99 <sup>(4)</sup> | 106                | C 1)                                                                              | 6 720                                     | 15 400  | 19 800  | 25 600  | 36 600  | –       | –       | –       |
|                                                                                                                                               |                                                                                     |                                                       |                                       |                    | C 2)                                                                              | 6 030                                     | 14 700  | 18 500  | 24 400  | 34 900  | –       | –       | –       |
|                                                                                                                                               |                                                                                     | C <sub>0</sub> 1)                                     | 7 340                                 | 16 500             | 21 200                                                                            | 28 900                                    | 49 300  | –       | –       | –       | –       | –       |         |
|                                                                                                                                               |                                                                                     | C <sub>0</sub> 2)                                     | 6 230                                 | 15 300             | 19 100                                                                            | 26 900                                    | 45 800  | –       | –       | –       | –       | –       |         |
|                                                                                                                                               |                                                                                     | M <sub>t</sub> 1)                                     | 65                                    | 200                | 280                                                                               | 440                                       | 790     | –       | –       | –       | –       | –       |         |
|                                                                                                                                               |                                                                                     | M <sub>t</sub> 2)                                     | 58                                    | 190                | 260                                                                               | 420                                       | 750     | –       | –       | –       | –       | –       |         |
|                                                                                                                                               |  | SKS<br>R1666 <sup>(3)</sup><br>R2010 <sup>(4)</sup>   | 58 <sup>3)</sup><br>99 <sup>(4)</sup> | 106                | M <sub>t0</sub> 1)                                                                | 71                                        | 210     | 300     | 500     | 1 060   | –       | –       | –       |
|                                                                                                                                               |                                                                                     |                                                       |                                       |                    | M <sub>t0</sub> 2)                                                                | 60                                        | 200     | 270     | 470     | 980     | –       | –       | –       |
|                                                                                                                                               |                                                                                     | M <sub>L</sub> 1)                                     | 29                                    | 83                 | 130                                                                               | 200                                       | 340     | –       | –       | –       | –       | –       |         |
|                                                                                                                                               |                                                                                     | M <sub>L</sub> 2)                                     | 27                                    | 81                 | 120                                                                               | 200                                       | 330     | –       | –       | –       | –       | –       |         |
|                                                                                                                                               |                                                                                     | M <sub>L0</sub> 1)                                    | 32                                    | 89                 | 140                                                                               | 230                                       | 460     | –       | –       | –       | –       | –       |         |
|                                                                                                                                               |                                                                                     | M <sub>L0</sub> 2)                                    | 28                                    | 84                 | 130                                                                               | 220                                       | 430     | –       | –       | –       | –       | –       |         |
|                                                                                                                                               |  | FNN<br>R1693 <sup>(3)6)8)</sup>                       | 64 <sup>3)</sup>                      | 106 <sup>(6)</sup> | C 1)                                                                              | –                                         | 14 500  | 28 600  | –       | –       | –       | –       | –       |
|                                                                                                                                               |                                                                                     |                                                       |                                       |                    | C <sub>0</sub> 1)                                                                 | –                                         | 24 400  | 35 900  | –       | –       | –       | –       | –       |
|                                                                                                                                               |                                                                                     | M <sub>t</sub> 1)                                     | –                                     | 190                | 410                                                                               | –                                         | –       | –       | –       | –       | –       | –       |         |
|                                                                                                                                               |                                                                                     | M <sub>t0</sub> 1)                                    | –                                     | 310                | 510                                                                               | –                                         | –       | –       | –       | –       | –       | –       |         |
|                                                                                                                                               |                                                                                     | M <sub>L</sub> 1)                                     | –                                     | 100                | 290                                                                               | –                                         | –       | –       | –       | –       | –       | –       |         |
|                                                                                                                                               |                                                                                     | M <sub>L0</sub> 1)                                    | –                                     | 165                | 360                                                                               | –                                         | –       | –       | –       | –       | –       | –       |         |
|                                                                                                                                               |  | FKN<br>R1663 <sup>(3)6)8)</sup>                       | 66 <sup>3)</sup>                      | 106 <sup>(6)</sup> | C 1)                                                                              | –                                         | 9 600   | 19 800  | –       | –       | –       | –       | –       |
|                                                                                                                                               |                                                                                     |                                                       |                                       |                    | C <sub>0</sub> 1)                                                                 | –                                         | 13 600  | 21 200  | –       | –       | –       | –       | –       |
|                                                                                                                                               |                                                                                     | M <sub>t</sub> 1)                                     | –                                     | 120                | 280                                                                               | –                                         | –       | –       | –       | –       | –       | –       |         |
|                                                                                                                                               |                                                                                     | M <sub>t0</sub> 1)                                    | –                                     | 170                | 300                                                                               | –                                         | –       | –       | –       | –       | –       | –       |         |
|                                                                                                                                               |                                                                                     | M <sub>L</sub> 1)                                     | –                                     | 40                 | 130                                                                               | –                                         | –       | –       | –       | –       | –       | –       |         |
|                                                                                                                                               |                                                                                     | M <sub>L0</sub> 1)                                    | –                                     | 58                 | 140                                                                               | –                                         | –       | –       | –       | –       | –       | –       |         |
| Super ball runner blocks made of steel <sup>3)</sup><br>Resist CR <sup>(6)</sup>                                                              |  | FKS<br>1661 <sup>(3)6)</sup>                          | 88 <sup>3)</sup>                      | 107 <sup>(6)</sup> | C 1)                                                                              | 3 900                                     | 10 100  | 11 400  | 15 800  | 21 100  | –       | –       | –       |
|                                                                                                                                               |                                                                                     |                                                       |                                       |                    | F <sub>max</sub> 1)                                                               | 1 500                                     | 3 900   | 4 400   | 6 100   | 8 100   | –       | –       | –       |
|                                                                                                                                               |  | SKS<br>1662 <sup>(3)6)</sup>                          | 90 <sup>3)</sup>                      | 107 <sup>(6)</sup> | M <sub>t</sub> 1)                                                                 | 39                                        | 130     | 170     | 270     | 450     | –       | –       | –       |
|                                                                                                                                               |                                                                                     |                                                       |                                       |                    | M <sub>tmax</sub> 1)                                                              | 15                                        | 50      | 65      | 105     | 175     | –       | –       | –       |





| Ball runner blocks                                        |                                                                                     |                                                                                   | Page                                          | Size                                                                              | 15                                        | 20            | 25     | 30     | 35     | 45     | 55      | 65      |         |        |
|-----------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------|---------------|--------|--------|--------|--------|---------|---------|---------|--------|
|                                                           |                                                                                     |                                                                                   |                                               |  | Load capacities (N) and load moments (Nm) |               |        |        |        |        |         |         |         |        |
| High-speed ball runner blocks made of steel <sup>7)</sup> |    | FNS<br>R2001 ... 9.<br>R1651 (size 55)                                            | 85                                            | C                                                                                 | <sup>1)</sup>                             | 6 880         | 16 300 | 20 000 | 25 500 | 36 200 | 60 300  | 76 300  | –       |        |
|                                                           |                                                                                     |                                                                                   |                                               | C <sub>0</sub>                                                                    | <sup>1)</sup>                             | 8 860         | 20 800 | 25 100 | 33 500 | 56 500 | 92 100  | 122 000 | –       |        |
|                                                           |                                                                                     |                                                                                   |                                               | M <sub>t</sub>                                                                    | <sup>1)</sup>                             | 66            | 210    | 280    | 440    | 780    | 1 630   | 2 420   | –       |        |
|                                                           |    | SNS<br>R2011 ... 9.<br>R1622 (size 55)                                            | 85                                            | M <sub>t0</sub>                                                                   | <sup>1)</sup>                             | 85            | 270    | 360    | 580    | 1 210  | 2 490   | 3 860   | –       |        |
|                                                           |                                                                                     |                                                                                   |                                               | M <sub>L</sub>                                                                    | <sup>1)</sup>                             | 47            | 140    | 200    | 310    | 510    | 1 070   | 1 620   | –       |        |
|                                                           |                                                                                     |                                                                                   |                                               | M <sub>L0</sub>                                                                   | <sup>1)</sup>                             | 61            | 180    | 250    | 400    | 790    | 1 640   | 2 580   | –       |        |
|                                                           |    | FLS<br>R2002 ... 9.<br>R1653<br>(sizes 55, 65)                                    | 85                                            | C                                                                                 | <sup>1)</sup>                             | 8 930         | 20 700 | 26 000 | 32 100 | 46 600 | 77 700  | 96 700  | 223 000 |        |
|                                                           |                                                                                     |                                                                                   |                                               | C <sub>0</sub>                                                                    | <sup>1)</sup>                             | 12 800        | 29 200 | 36 600 | 46 700 | 81 100 | 132 000 | 171 000 | 404 000 |        |
|                                                           |                                                                                     |                                                                                   |                                               | M <sub>t</sub>                                                                    | <sup>1)</sup>                             | 86            | 260    | 370    | 560    | 1 000  | 2 100   | 3 070   | 8 810   |        |
|                                                           |                                                                                     |  | SLS<br>R2012 ... 9.<br>R1623<br>(size 55, 65) | 85                                                                                | M <sub>t0</sub>                           | <sup>1)</sup> | 120    | 370    | 520    | 810    | 1 740   | 3 570   | 5 420   | 16 000 |
|                                                           |                                                                                     |                                                                                   |                                               |                                                                                   | M <sub>L</sub>                            | <sup>1)</sup> | 85     | 240    | 370    | 520    | 900     | 1 910   | 2 770   | 8 160  |
|                                                           |                                                                                     |                                                                                   |                                               |                                                                                   | M <sub>L0</sub>                           | <sup>1)</sup> | 120    | 340    | 520    | 750    | 1 560   | 3 250   | 4 880   | 14 800 |
| Aluminum ball runner block <sup>7)</sup>                  |   | FNS<br>R1631                                                                      | 94                                            | C                                                                                 | <sup>1)</sup>                             | 9 860         | 23 400 | 28 600 | 36 500 | 51 800 | –       | –       | –       |        |
|                                                           |                                                                                     |                                                                                   |                                               | C                                                                                 | <sup>2)</sup>                             | 8 850         | 22 200 | 26 700 | 34 800 | 49 400 | –       | –       | –       |        |
|                                                           |                                                                                     |                                                                                   |                                               | F <sub>max</sub>                                                                  | <sup>1) 2)</sup>                          | 3 000         | 7 200  | 8 800  | 12 200 | 16 200 | –       | –       | –       |        |
|                                                           |  | SNS<br>R1632                                                                      | 96                                            | M <sub>t</sub>                                                                    | <sup>1)</sup>                             | 95            | 300    | 410    | 630    | 1 110  | –       | –       | –       |        |
|                                                           |                                                                                     |                                                                                   |                                               | M <sub>t</sub>                                                                    | <sup>2)</sup>                             | 85            | 280    | 380    | 600    | 1 060  | –       | –       | –       |        |
|                                                           |                                                                                     |                                                                                   |                                               | M <sub>tmax</sub>                                                                 | <sup>1) 2)</sup>                          | 29            | 92     | 125    | 210    | 345    | –       | –       | –       |        |
|                                                           |                                                                                     |                                                                                   |                                               | M <sub>L</sub>                                                                    | <sup>1)</sup>                             | 68            | 200    | 290    | 440    | 720    | –       | –       | –       |        |
|                                                           |                                                                                     |                                                                                   |                                               | M <sub>L</sub>                                                                    | <sup>2)</sup>                             | 62            | 190    | 270    | 420    | 700    | –       | –       | –       |        |
| M <sub>Lmax</sub>                                         | <sup>1) 2)</sup>                                                                    | 16                                                                                | 50                                            | 70                                                                                | 110                                       | 170           | –      | –      | –      |        |         |         |         |        |

The determination of the dynamic load capacities and load moments is based on a 100,000 m stroke according to DIN ISO14728-1. However, the values are often based on only 50,000 m. For comparison: Multiply the values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** by 1.26 according to the table.

- 1) Ball runner block **without** ball chain.
- 2) Ball runner block **with** ball chain.
- 3) Steel: All steel parts made of carbon steel.
- 4) Resist NR size 15 - 35: Ball runner block body made of corrosion-resistant steel as per DIN EN 10088.
- 5) Resist NR II: All steel components are made from corrosion-resistant steel in accordance with DIN EN 10088.
- 6) Resist CR: Steel ball runner block body with corrosion-resistant coating, matte-silver finish, hard chrome plated.
- 7) Ball runner block BSHP
- 8) BSHP ball runner block size 25 only

For short product names of the types, see the product description

# Product overview ball runner blocks with load capacities and load moments

| Ball runner blocks                                                                                                                                                                                                                                                      |                               |                               | Page              |                               | Size                                                                              | 15                                        | 20     | 25     | 30      | 35 | 45 | 55 | 65 |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|-------------------------------|-------------------|-------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------|--------|--------|---------|----|----|----|----|
|                                                                                                                                                                                                                                                                         |                               |                               |                   |                               |  | Load capacities (N) and load moments (Nm) |        |        |         |    |    |    |    |
| Ball runner blocks Resist NR II <sup>(5)7)</sup><br><br><br><br>                                      | FNS<br>R2001 ... 0.           | 102                           | 103               | C <sup>1)</sup>               | 5 100                                                                             | 12 300                                    | 15 000 | 20 800 | 27 600  | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | C <sup>2)</sup>               | 4 700                                                                             | 11 400                                    | 14 000 | 19 300 | 27 600  | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | C <sub>0</sub> <sup>1)</sup>  | 9 300                                                                             | 16 900                                    | 21 000 | 28 700 | 37 500  | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | C <sub>0</sub> <sup>2)</sup>  | 8 400                                                                             | 15 000                                    | 18 900 | 25 800 | 37 500  | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | M <sub>t</sub> <sup>1)</sup>  | 63                                                                                | 205                                       | 270    | 460    | 760     | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | M <sub>t</sub> <sup>2)</sup>  | 58                                                                                | 190                                       | 250    | 425    | 760     | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         | SNS<br>R2011 ... 0.           | 103                           |                   | M <sub>t0</sub> <sup>1)</sup> | 90                                                                                | 215                                       | 295    | 500    | 805     | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | M <sub>t0</sub> <sup>2)</sup> | 81                                                                                | 190                                       | 265    | 450    | 805     | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | M <sub>L</sub> <sup>1)</sup>  | 34                                                                                | 110                                       | 150    | 245    | 375     | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | M <sub>L</sub> <sup>2)</sup>  | 31                                                                                | 100                                       | 140    | 225    | 375     | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | M <sub>L0</sub> <sup>1)</sup> | 49                                                                                | 115                                       | 165    | 265    | 390     | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | M <sub>L0</sub> <sup>2)</sup> | 44                                                                                | 100                                       | 150    | 240    | 390     | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         | FLS<br>R2002 ... 0.           | 102                           | 103               | C <sup>1)</sup>               | 8 500                                                                             | 16 000                                    | 20 000 | 26 300 | 36 500  | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | C <sup>2)</sup>               | 7 600                                                                             | 15 200                                    | 18 100 | 25 000 | 34 800  | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | C <sub>0</sub> <sup>1)</sup>  | 14 000                                                                            | 24 400                                    | 31 600 | 40 100 | 56 200  | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | C <sub>0</sub> <sup>2)</sup>  | 12 100                                                                            | 22 500                                    | 27 400 | 37 300 | 52 500  | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | M <sub>t</sub> <sup>1)</sup>  | 82                                                                                | 265                                       | 365    | 590    | 1025    | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | M <sub>t</sub> <sup>2)</sup>  | 73                                                                                | 250                                       | 330    | 560    | 975     | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         | SLS<br>R2012 ... 0.           | 103                           |                   | M <sub>t0</sub> <sup>1)</sup> | 132                                                                               | 310                                       | 450    | 695    | 1 210   | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | M <sub>t0</sub> <sup>2)</sup> | 118                                                                               | 295                                       | 410    | 660    | 1 150   | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | M <sub>L</sub> <sup>1)</sup>  | 64                                                                                | 190                                       | 290    | 420    | 710     | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | M <sub>L</sub> <sup>2)</sup>  | 58                                                                                | 180                                       | 265    | 400    | 675     | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | M <sub>L0</sub> <sup>1)</sup> | 104                                                                               | 230                                       | 350    | 495    | 840     | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | M <sub>L0</sub> <sup>2)</sup> | 93                                                                                | 215                                       | 320    | 470    | 805     | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         | FKS<br>R2000 ... 0.           | 102                           | 103               | C <sup>1)</sup>               | 4 500                                                                             | 8 200                                     | 10 500 | 14 500 | 19 300  | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | C <sup>2)</sup>               | 3 900                                                                             | 8 200                                     | 9 200  | 14 500 | 19 300  | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | C <sub>0</sub> <sup>1)</sup>  | 5 600                                                                             | 9 400                                     | 12 600 | 17 200 | 22 400  | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | C <sub>0</sub> <sup>2)</sup>  | 4 600                                                                             | 9 400                                     | 10 500 | 17 200 | 22 400  | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | M <sub>t</sub> <sup>1)</sup>  | 44                                                                                | 125                                       | 195    | 320    | 545     | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | M <sub>t</sub> <sup>2)</sup>  | 37                                                                                | 125                                       | 175    | 320    | 545     | –  | –  | –  |    |
| SKS<br>R2010 ... 0.                                                                                                                                                                                                                                                     | 103                           | M <sub>t0</sub> <sup>1)</sup> |                   | 55                            | 115                                                                               | 180                                       | 295    | 485    | –       | –  | –  |    |    |
|                                                                                                                                                                                                                                                                         |                               | M <sub>t0</sub> <sup>2)</sup> |                   | 48                            | 115                                                                               | 160                                       | 295    | 485    | –       | –  | –  |    |    |
|                                                                                                                                                                                                                                                                         |                               | M <sub>L</sub> <sup>1)</sup>  |                   | 16                            | 45                                                                                | 70                                        | 110    | 170    | –       | –  | –  |    |    |
|                                                                                                                                                                                                                                                                         |                               | M <sub>L</sub> <sup>2)</sup>  |                   | 13                            | 45                                                                                | 60                                        | 110    | 170    | –       | –  | –  |    |    |
|                                                                                                                                                                                                                                                                         |                               | M <sub>L0</sub> <sup>1)</sup> |                   | 19                            | 40                                                                                | 65                                        | 105    | 150    | –       | –  | –  |    |    |
|                                                                                                                                                                                                                                                                         |                               | M <sub>L0</sub> <sup>2)</sup> |                   | 16                            | 40                                                                                | 55                                        | 105    | 150    | –       | –  | –  |    |    |
| Wide ball runner blocks made of steel <sup>(3)7)</sup> Resist CR <sup>(6)7)</sup><br><br><br><br> | BNS<br>R1671 <sup>(3)6)</sup> | 126 <sup>3)</sup>             | 130 <sup>6)</sup> | C <sup>1)</sup>               | –                                                                                 | 14 900                                    | 36 200 | –      | 70 700  | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | C <sup>2)</sup>               | –                                                                                 | 13 700                                    | 33 700 | –      | –       | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | C <sub>0</sub> <sup>1)</sup>  | –                                                                                 | 20 600                                    | 50 200 | –      | 126 000 | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | C <sub>0</sub> <sup>2)</sup>  | –                                                                                 | 18 200                                    | 45 200 | –      | –       | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | M <sub>t</sub> <sup>1)</sup>  | –                                                                                 | 340                                       | 1 350  | –      | 3 500   | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | M <sub>t</sub> <sup>2)</sup>  | –                                                                                 | 310                                       | 1 260  | –      | –       | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         | CNS<br>R1672 <sup>(3)6)</sup> | 130 <sup>3)</sup>             |                   | M <sub>t0</sub> <sup>1)</sup> | –                                                                                 | 470                                       | 1 870  | –      | 6 240   | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | M <sub>t0</sub> <sup>2)</sup> | –                                                                                 | 410                                       | 1 680  | –      | –       | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | M <sub>L</sub> <sup>1)</sup>  | –                                                                                 | 140                                       | 490    | –      | 1 470   | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | M <sub>L</sub> <sup>2)</sup>  | –                                                                                 | 130                                       | 460    | –      | –       | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | M <sub>L0</sub> <sup>1)</sup> | –                                                                                 | 190                                       | 680    | –      | 2 620   | –  | –  | –  |    |
|                                                                                                                                                                                                                                                                         |                               |                               |                   | M <sub>L0</sub> <sup>2)</sup> | –                                                                                 | 170                                       | 620    | –      | –       | –  | –  | –  |    |

The determination of the dynamic load capacities and load moments is based on a 100,000 m stroke according to DIN ISO14728-1. However, the values are often based on only 50,000 m. For comparison: Multiply the values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** by 1.26 according to the table.

- 1) Ball runner block **without** ball chain.
- 2) Ball runner block **with** ball chain.
- 3) Steel: All steel parts made of carbon steel.
- 4) Resist NR size 15 - 35: Ball runner block body made of corrosion-resistant steel as per DIN EN 10088.
- 5) Resist NR II: All steel components are made from corrosion-resistant steel in accordance with DIN EN 10088.
- 6) Resist CR: Steel ball runner block body with corrosion-resistant coating, matte-silver finish, hard chrome plated.
- 7) Ball runner block BSHP
- 8) BSHP ball runner block size 25 only





For short product names of the types, see the product description



## Product overview ball guide rails with rail lengths

Ball guide rails can be cut to length as desired by the customer. The maximum lengths for a one-piece rail section can be found in the following table and in the "Ball guide rails" chapter. If longer rails are required, Bosch Rexroth will supply them as multi-piece ball guide rails.

| Ball guide rails                                                                                                                               |                                                                                                                                                                                                         |            | Page  | Size             |       |       |       |       |       |       |
|------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------|------------------|-------|-------|-------|-------|-------|-------|
|                                                                                                                                                |                                                                                                                                                                                                         |            |       | 15               | 20    | 25    | 30    | 35    | 45    | 55    |
|                                                                                                                                                |                                                                                                                                                                                                         |            |       | Rail length (mm) |       |       |       |       |       |       |
| <b>Standard ball guide rails made of steel</b>                | <b>SNS / SNO</b><br><b>R1605 .3. .. / R1605 .B. ..</b><br>For bolting from above with cover strip and strip clamps                                                                                      | <b>110</b> | 3 836 | 5 816            | 5 816 | 5 836 | 5 836 | 5 771 | 3 836 | 3 746 |
|                                                                                                                                                |  <b>SNS / SNO</b><br><b>R1605 .6. .. / R1605 .D. ..</b><br>For bolting from above with cover strip and protective caps | <b>112</b> | 3 836 | 5 816            | 5 816 | 5 836 | 5 836 | 5 771 | 3 836 | 3 746 |
|                                                                                                                                                |  <b>SNS / SNO</b><br><b>R1605 .0. .. / R1605 .C. ..</b><br>For bolting from above with plastic caps                    | <b>114</b> | 3 836 | 5 816            | 5 816 | 5 836 | 5 836 | 5 771 | 3 836 | 3 746 |
|                                                                                                                                                |  <b>SNS</b><br><b>R1606 .5. ..</b><br>For bolting from above, for caps made of steel                                   | <b>116</b> | –     | –                | 5 816 | 5 836 | 5 836 | 5 771 | 3 836 | 3 746 |
|                                                                                                                                                |  <b>SNS</b><br><b>R1607 .0. ..</b><br>For bolting from below                                                          | <b>118</b> | 3 836 | 5 816            | 5 816 | 5 836 | 5 836 | 5 771 | 3 836 | 3 746 |
| <b>Standard ball guide rails Resist NR II<sup>1)</sup></b>  | <b>SNS</b><br><b>R2045 .3. ..</b><br>For bolting from above with cover strip and strip clamps                                                                                                           | <b>120</b> | 1 856 | 3 836            | 3 836 | 3 836 | 3 836 | –     | –     | –     |
|                                                                                                                                                |  <b>SNS</b><br><b>R2045 .0. ..</b><br>For bolting from above with plastic caps                                       | <b>121</b> | 1 856 | 3 836            | 3 836 | 3 836 | 3 836 | –     | –     | –     |
|                                                                                                                                                |  <b>SNS</b><br><b>R2047 .0. ..</b><br>For bolting from below                                                         | <b>121</b> | 1 856 | 3 836            | 3 836 | 3 836 | 3 836 | –     | –     | –     |
| <b>Standard ball guide rails Resist CR<sup>2)</sup></b>     | <b>SNS</b><br><b>R1645 .3. ..</b><br>For bolting from above with cover strip and strip clamps                                                                                                           | <b>122</b> | 3 836 | 3 836            | 3 836 | 3 836 | 3 836 | 3 776 | 3 836 | 3 746 |
|                                                                                                                                                |  <b>SNS</b><br><b>R1645 .0. ..</b><br>For bolting from above with plastic caps                                       | <b>123</b> | 3 836 | 3 836            | 3 836 | 3 836 | 3 836 | 3 776 | 3 836 | 3 746 |
|                                                                                                                                                |  <b>SNS</b><br><b>R1647 .0. ..</b><br>For bolting from below                                                         | <b>123</b> | 3 836 | 3 836            | 3 836 | 3 836 | 3 836 | 3 776 | 3 836 | 3 746 |

| Ball guide rails                              |                                                                                   |                                                                                      | Size             |       |       |
|-----------------------------------------------|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|------------------|-------|-------|
|                                               |                                                                                   |                                                                                      | 20/40            | 25/70 | 35/90 |
|                                               |                                                                                   |                                                                                      | Rail length (mm) |       |       |
| Wide ball guide rails made of steel           |  | <b>BNS</b><br><b>R1675 .0. ...</b><br>For bolting from above with plastic caps       | 134              | 3 836 | 3 836 |
|                                               |  | <b>BNS</b><br><b>R1676 .5. ...</b><br>For bolting from above, for caps made of steel | 136              | –     | 3 836 |
|                                               |  | <b>BNS</b><br><b>R1677 .0. ...</b><br>For bolting from below                         | 137              | 3 836 | 3 836 |
| Wide ball guide rails Resist CR <sup>2)</sup> |  | <b>BNS</b><br><b>R1673 .0. ...</b><br>For bolting from above with plastic caps       | 134              | 3 836 | 3 836 |

**1)** Resist NR II: Ball guide rail made of corrosion-resistant steel as per DIN EN 10088

**2)** Resist CR: Ball guide rail made of steel with corrosion-resistant coating, matte-silver finish, hard chrome plated

For short product names of the types, see the product description

# General technical data and calculations

## General notes

The general technical data and calculations apply to all ball rail systems i.e. to all ball runner blocks and ball guide rails.

Specific technical data relating to the individual ball runner blocks and ball guide rails is given separately.

## Preload classes

To cover the widest possible range of applications, Rexroth ball runner blocks are available in different preload classes.

The following preload classes are available:

- ▶ Ball runner block without preload (preload class C0)
- ▶ Ball runner blocks with moderate preload (preload class C1)
- ▶ Ball runner blocks with average preload (preload class C2)
- ▶ Ball runner blocks with high preload (preload class C3)

To prevent reductions to the service life, the preload should not exceed 1/3 of the load on bearing  $F$ .

In general, the rigidity of the ball runner block rises with increasing preload. If vibrations occur, select a correspondingly high preload ( $\geq$  preload class C2).

## Guide systems with parallel rails

When choosing the preload class, also pay attention to the permissible parallelism offset of the rails ("Accuracy class selection criterion").

When installing ball rail systems of accuracy class N, we recommend preload class C0 or C1 to avoid distortive stress due to the tolerances.

## Speed

$v_{\max}$ : 3–10 m/s

For exact values, see the individual ball runner blocks.

## Acceleration

$a_{\max}$ : 250–500 m/s<sup>2</sup>

For exact values, see the individual ball runner blocks.

(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

If preload force  $F_{\text{pr}}$  is canceled,  $a_{\max} = 50 \text{ m/s}^2$  applies

## Operating temperature range

$t$ : 0–80 °C


Up to 100°C is permissible for a short time.

For operation at negative temperatures, please consult us.

For ball runner blocks without ball chain: Lower limit –10 °C.

## Friction

The friction coefficient  $\mu$  of Rexroth's ball rail system is approximately 0.002 to 0.003 (without the friction of the seal).

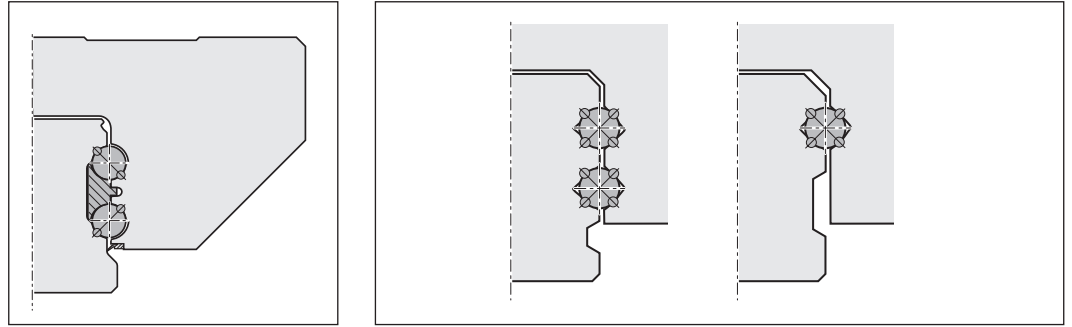

Due to the Rexroth design with four rows of balls, there are always **two points of contact** in all directions of loading. This reduces the friction to a minimum.

Other ball rails with two or four rows of balls with **four points of contact** have multiple friction: due to the differential slip with lateral loading and with a comparable preload without load, the gothic raceway profile causes higher friction (depending on the conformity and the load, up to five times the friction coefficient). This high friction leads correspondingly to greater heat.

## Seals

Seals are used to prevent dirt, chips and coolants, etc. from working their way into the inside of the ball runner block, thereby preventing reductions to its service life. For more information, see "Selection criteria / Seals".

### Standard seal (SS)

Universal seals are fitted as standard in Rexroth ball runner blocks. They have a uniform sealing effect for ball guide rails with and without cover strips. Low friction and a good sealing effect have both been taken into account in the design. For applications where effective sealing is required.

### Low-friction (LS)

For special requirements with regard to ease of movement.

### Double-lip seal (DS)

For increased exposure to media

### Front seal

For applications in environments with fine dirt or metal particles, as well as coolants or cutting fluids.

Interchangeable during servicing.

Front seals are available as accessories for mounting by the customer.

### FKM seal

For applications in extreme environments with fine dirt or metal particles, as well as heavy use of coolants or cutting fluids.

Interchangeable during servicing.

FKM front seals are available as accessories for mounting by the customer.

### Cover plate wiper

For use in environments with coarse dirt or chips.

Cover plate wipers are available as accessories for mounting by the customer.

# General technical data and calculations

How to select a linear guide system according to DIN 637 is described on page 10. The necessary calculations are explained in the following chapter. They are integrated in the "Linear Motion Designer" calculation program. You will find the link to the download in the chapter "further information".

## Forces and moments

In Rexroth ball rail systems the raceways are arranged at a pressure angle of  $45^\circ$ .

This results in the same high load capacity of the entire system in all four main directions of loading.


The ball runner blocks may be subjected to both forces and load moments.

### Forces in the four main directions of loading

- ▶ Tension  $F_z$  (positive z-direction)
- ▶ Pressure  $-F_z$  (negative z-direction)
- ▶ Side load  $F_y$  (positive y-direction)
- ▶ Side load  $-F_y$  (negative y-direction)

### Moments

- ▶ Torsional moment  $M_x$  (around the y-axis)
- ▶ Longitudinal moment  $M_y$  (around the y-axis)
- ▶ Longitudinal moment  $M_z$  (around the z-axis)

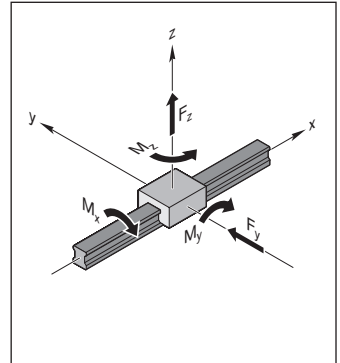

## Definition of load capacities

### Dynamic load capacity C

The radial load (whose extent and direction does not change) that a linear anti-friction bearing can theoretically absorb for a nominal life covering  $10^5$  m (according to DIN ISO 14728-1).


Note: The dynamic load capacities in the tables are above the DIN or ISO values.

These values have been confirmed in tests.

### Static load capacity $C_0$

Static load in the load direction that corresponds to a calculated load in the center of the contact point with the greatest load between the ball and raceway of 4 200 MPa.

Note: With this stress at the contact point, permanent overall deformation of the ball and the track zone occurs that corresponds to about 0.0001 times the ball diameter (according to DIN ISO 14 728-1).

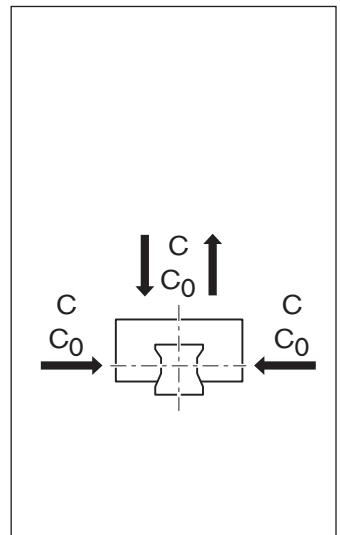

## Definition of load moment capacities

### Dynamic torsional moment load capacity $M_t$

Comparative dynamic moment around the X-axis, which causes a load equivalent to the dynamic load capacity C.

### Static torsional moment load capacity $M_{t0}$


The comparable static moment around the x-axis that induces a load corresponding to the static load capacity  $C_0$ .

### Dynamic longitudinal moment load capacity $M_L$

The dynamic comparable dynamic moment around the transverse axis y or the vertical axis z that induces a load corresponding to the dynamic load capacity C.

### Static longitudinal moment load capacity $M_{L0}$

The static comparable dynamic moment around the transverse axis y or the vertical axis z that induces a load corresponding to the static load capacity  $C_0$ .

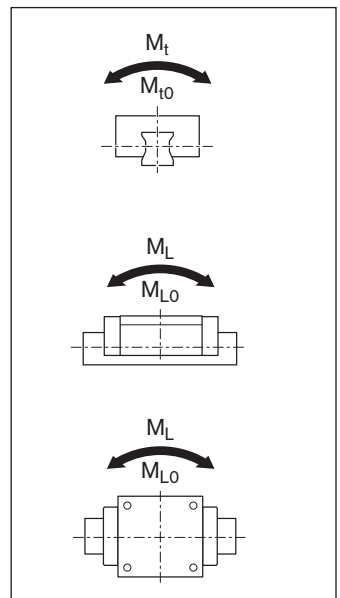



**Definition and calculation of the nominal service life**

The calculated service life which an individual linear rolling bearing, or a group of apparently identical rolling bearings operating under the same conditions, can attain with a 90% probability, with contemporary, commonly used materials and manufacturing quality under conventional operating conditions (as per DIN ISO 14728-1).

**Nominal service life in meters**

$$(1) L_{10} = \left( \frac{C}{F_m} \right)^3 \cdot 10^5 \text{ m}$$

**Service life in operating hours with constant stroke and constant stroke repetition rate**

$$(2) L_{h10} = \frac{L_{10}}{2 \cdot s \cdot n \cdot 60}$$

If the stroke length  $s$  and the stroke repetition rate  $n$  are constant over the total service life, you can use formula (2) to determine the service life in operating hours.

**Nominal service life at variable travel speed As an alternative, it is**

$$(3) L_{h10} = \frac{L_{10}}{60 \cdot v_m}$$

**possible to use formula (3) to calculate the service life in operating hours using the average speed  $v_m$ .**

This average speed  $v_m$  is calculated with speeds that can be changed on a stepwise basis using the time steps  $q_{tn}$  of the individual load stages (4).

$$(4) v_m = \frac{|v_1| \cdot q_{t1} + |v_2| \cdot q_{t2} + \dots + |v_n| \cdot q_{tn}}{100\%}$$

**Modified life expectancy**

$$L_{na} = a_1 \cdot \left( \frac{C}{F_m} \right)^3 \cdot 10^5 \text{ m}$$

$$L_{ha} = \frac{L_{na}}{2 \cdot s \cdot n \cdot 60}$$

If a 90 percent requisite reliability is not enough, you must reduce the service life values by a factor of  $a_1$  in accordance with the table below.

| Requisite reliability (%) | $L_{na}$  | Factor $a_1$ |
|---------------------------|-----------|--------------|
| 90                        | $L_{10a}$ | 1.00         |
| 95                        | $L_{5a}$  | 0.64         |
| 96                        | $L_{4a}$  | 0.55         |
| 97                        | $L_{3a}$  | 0.47         |
| 98                        | $L_{2a}$  | 0.37         |
| 99                        | $L_{1a}$  | 0.25         |

**Notes**

DIN ISO 14728-1 limits the validity of the formula (1) to dynamically equivalent loads  $F_m < 0.5$ . However, in our tests we verified that under ideal operating conditions this service life formula can be applied up to loads of  $F_m = C$ . Under some circumstances, with stroke lengths below  $2 \cdot$  ball runner block length  $B_1$  (see the dimension tables) a load capacity reduction may be required. Please consult us.

# General technical data and calculations

## Load on bearing for calculating the service life

### Note

In general, both the static and dynamic load ratios should not be below the minimum value of 4.0. In the case of applications that place high demands on rigidity and/or the service life, a higher load ratio is required. With tensile loads, check the screw stability. See the chapter "Instructions for mounting".

Dynamic load ratio

$$\frac{C}{F_{m, \max}}$$

Static load ratio

$$\frac{C_0}{F_{\text{eff}, \max}}$$

### Combined equivalent bearing load

In the case of a combined vertical and horizontal external load, calculate the dynamically equivalent load  $F_{\text{comb}}$  according to formula (5).


### Note

The structure of the ball rail system permits this simplified calculation.

### Note

Reduce an external load that affects the ball runner block at any angle with the correct sign to  $F_y$  and  $F_z$  and insert the amounts into formula (5) or (6).

$$(5) \quad F_{\text{comb}} = |F_y| + |F_z|$$



### Combined equivalent load on bearing in conjunction with moments


Using formula (6), you can combine all the partial loads that occur in a load case into one single comparison load, i.e. the combined equivalent load on bearing.

### Notes

Including moments as stated in formula (6) only applies to an individual ball guide rail with just one ball runner block. The formula is simpler for other combinations.

The forces and moments plotted in the coordinate system can also have an effect in the opposite direction. Reduce an external load that affects the ball runner block at any angle to  $F_y$  and  $F_z$  and insert the amounts into formula (6). The structural design of the ball runner blocks allows this simplified calculation.


$$(6) \quad F_{\text{comb}} = |F_y| + |F_z| + C \cdot \frac{|M_x|}{M_t} + C \cdot \frac{|M_y|}{M_L} + C \cdot \frac{|M_z|}{M_L}$$

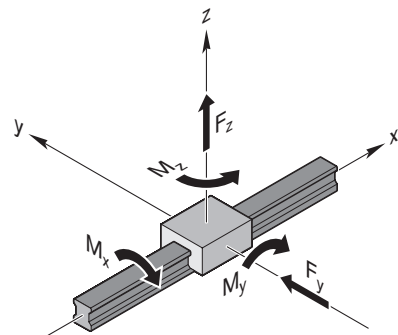

### Considering the internal preload force $F_{pr}$

To increase the rigidity and precision of the guide system, it is advisable to use preloaded ball runner blocks (cf. "System preload selection criterion").

When using ball runner blocks of preload classes C2 and C3, it may be necessary to consider the internal preload force; this is because both rows of balls a and b are preloaded against one another by a specific oversize at an internal preload force  $F_{pr}$  and deform by the amount  $\delta_{pr}$  (see the diagram).

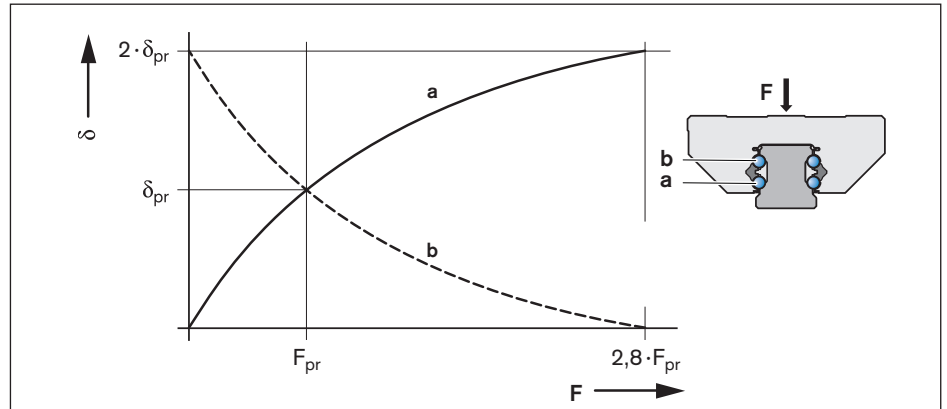

|               |                                              |     |
|---------------|----------------------------------------------|-----|
| a             | = Loaded (lower) row of balls                | (N) |
| b             | = Non-loaded (upper) row of balls            | (N) |
| $\delta$      | = Deformation of rolling contact at F        | (-) |
| $\delta_{pr}$ | = Deformation of rolling contact at $F_{pr}$ | (-) |
| F             | = Load on the ball runner block              | (N) |
| $F_{pr}$      | = Internal preload force                     | (N) |

### Effective equivalent load on bearing

From an external load amounting to 2.8 times the internal preload force  $F_{pr}$  onward, a row of balls becomes preload-free.

#### Note

Under highly dynamic load conditions, the combined equivalent bearing load should be  $F_{comb} < 2.8 \cdot F_{pr}$  to prevent damage to anti-friction bearings due to slippage.

$$(7) \quad F_{eff} = F_{comb}$$

#### Case 1

$F_{comb} > 2.8 \cdot F_{pr}$   
In this case, the internal preload force  $F_{pr}$  does not affect the service life.

$$(8) \quad F_{eff} = \left( \frac{F_{comb}}{2.8 \cdot F_{pr}} + 1 \right)^{3/2} \cdot F_{pr}$$

#### Case 2

$F_{comb} \leq 2.8 \cdot F_{pr}$   
The preload force  $F_{pr}$  is included in the calculation of the effective equivalent load on bearing.

## General technical data and calculations

### Dynamically equivalent load on bearing

The determination of the dynamic equivalent load on bearing  $F_m$  for the calculation of the service life is implemented according to portions of distance  $q_m$  according to formula (9).

$$(9) \quad F_m = \sqrt[3]{(F_{\text{eff } 1})^3 \cdot \frac{q_{s1}}{100 \%} + (F_{\text{eff } 2})^3 \cdot \frac{q_{s2}}{100 \%} + \dots + (F_{\text{eff } n})^3 \cdot \frac{q_{sn}}{100 \%}}$$

### Equivalent static load on bearing

With a combined vertical and horizontal external static load in conjunction with a static torsional or longitudinal moment, calculate the static equivalent load on bearing  $F_{0 \text{ comb}}$  according to formula (10).

$$(10) \quad F_{0 \text{ comb}} = |F_{0y}| + |F_{0z}| + C_0 \cdot \frac{|M_{0x}|}{M_{t0}} + C_0 \cdot \frac{|M_{0y}|}{M_{L0}} + C_0 \cdot \frac{|M_{0z}|}{M_{L0}}$$

### Notes

The static equivalent load on bearing  $F_{0 \text{ comb}}$  must not exceed the static load capacity  $C_0$ . Formula (10) only applies when using a single ball guide rail.

Reduce an external load that affects the ball runner block at any angle to  $F_{0y}$  and  $F_{0z}$  and insert the amounts into formula (10).

### Definitions and calculation for dynamic and static load ratios

Using the ratio of load capacity to load of the ball runner blocks, you can make a preselection of the guideway.

The dynamic loading ratio  $C/F_{\text{max}}$  and the static loading ratio  $C_0/F_{0 \text{ max}}$  should be selected according to the application. The necessary load capacities are calculated from this. The load capacity overview yields the corresponding size and format.

### Guideline values for load ratios

The table below contains guideline values for the load ratios.

The table values are offered merely as a rough guide reflecting typical customer requirements (e.g. service life, accuracy, rigidity) by sector and application.

**Case 1:** Static load  $F_{0 \text{ max}} > F_{\text{max}}$ :

**Case 2:** Static load  $F_{0 \text{ max}} < F_{\text{max}}$ :

$$\text{Dynamic ratio} = \frac{C}{F_{\text{max}}}$$

$$\text{Static ratio} = \frac{C_0}{F_{0 \text{ max}}}$$

$$\text{Static ratio} = \frac{C_0}{F_{\text{max}}}$$

| Machine type/sector                                               | Application example      | C/Fmax   |
|-------------------------------------------------------------------|--------------------------|----------|
| <b>Machine tools</b>                                              | <b>General</b>           | 6 ... 9  |
|                                                                   | <b>Turning</b>           | 6 ... 7  |
|                                                                   | <b>Milling</b>           | 6 ... 7  |
|                                                                   | <b>Grinding</b>          | 9 ... 10 |
|                                                                   | <b>Engraving</b>         | 5        |
| <b>Rubber and plastics processing machinery</b>                   | <b>Injection molding</b> | 8        |
| <b>Woodworking and wood processing machines</b>                   | <b>Sawing, milling</b>   | 5        |
| <b>Area of mounting/handling technology and industrial robots</b> | <b>Handling</b>          | 5        |
| <b>Oil hydraulics and pneumatics</b>                              | <b>Lifting/lowering</b>  | 6        |

**Static load safety factor  $S_0$** 

You must verify mathematically any structural design involving rolling contact with regard to the static load safety factor. The static load safety factor for a linear guide results from the following equation:

$$S_0 = \frac{C_0}{F_{0 \max}}$$

In this connection,  $F_{0 \max}$  represents the maximum load amplitude that can occur, which can affect the linear guide. It does not matter whether this load is exerted only for a short period. It may represent the peak amplitude of an overall dynamic loading. For sizing, the data shown in the table applies.

| Conditions of use                                                                                          | Static load safety factor $S_0$ |
|------------------------------------------------------------------------------------------------------------|---------------------------------|
| Overhead arrangements and applications representing a high hazard potential                                | $\geq 12$                       |
| High dynamic load when at standstill, contamination.                                                       | 8 - 12                          |
| Normal sizing of machinery and plants without full knowledge of the load parameters or connection details. | 5 - 8                           |
| Full knowledge of all the load data. Vibration-free operation is ensured.                                  | 3 - 5                           |
| If there are health and safety hazards, paragraph 5.1.3 of DIN 637 is to be observed.                      |                                 |




**Key to formulas**

| Formula                     | Unit | Designation                                             |
|-----------------------------|------|---------------------------------------------------------|
| $a_1$                       | —    | Life expectancy factor                                  |
| $C$                         | N    | Dynamic load capacity                                   |
| $C_0$                       | N    | Static load capacity                                    |
| $F_{\max}$                  | N    | Maximum dynamic load                                    |
| $F_{0 \max}$                | N    | Maximum static load                                     |
| $F_{\text{comb}}$           | N    | Combined equivalent bearing load                        |
| $F_{0 \text{comb}}$         | N    | Equivalent static load on bearing                       |
| $F_{\text{eff}}$            | N    | Effective equivalent load on bearing                    |
| $F_{\text{eff } 1 \dots n}$ | N    | Uniform effective individual loads                      |
| $F_m$                       | N    | Dynamically equivalent load on bearing                  |
| $F_{\text{pr}}$             | N    | Preload force                                           |
| $F_y$                       | N    | External load due to a resulting force in y-direction   |
| $F_{0y}$                    | N    | External load due to a static force in y-direction      |
| $F_z$                       | N    | External load due to a resulting force in z-direction   |
| $F_{0z}$                    | N    | External load due to a static force in z-direction      |
| $M_t$                       | Nm   | Dynamic torsional moment load capacity <sup>1)</sup>    |
| $M_{t0}$                    | Nm   | Static torsional moment load capacity <sup>1)</sup>     |
| $M_L$                       | Nm   | Dynamic longitudinal moment load capacity <sup>1)</sup> |
| $M_{L0}$                    | Nm   | Static longitudinal moment load capacity <sup>1)</sup>  |
| $M_x$                       | Nm   | Load due to the resultant moment around the x-axis      |
| $M_{0x}$                    | Nm   | Load due to the static moment around the x-axis         |

| Formula               | Unit  | Designation                                               |
|-----------------------|-------|-----------------------------------------------------------|
| $M_y$                 | Nm    | Load due to the resultant moment around the y-axis        |
| $M_{0y}$              | Nm    | Load due to the static moment around the y-axis           |
| $M_z$                 | Nm    | Load due to the resultant moment around the z-axis        |
| $M_{0z}$              | Nm    | Load due to the static moment around the z-axis           |
| $L_{10}$              | m     | Nominal life (travel range)                               |
| $L_{h \ 10}$          | h     | Nominal life expectancy (time)                            |
| $L_{na}$              | m     | Modified life expectancy (travel range)                   |
| $L_{ha}$              | h     | Modified life expectancy (time)                           |
| $n$                   | rpm   | Stroke repetition rate (full cycles)                      |
| $s$                   | m     | Stroke length                                             |
| $S_0$                 | —     | Static load safety factor                                 |
| $v_m$                 | m/min | Average speed                                             |
| $v_1 \dots v_n$       | m/min | Travel speeds of phases 1 ... n                           |
| $q_{t1} \dots q_{tn}$ | %     | Discrete time steps for $v_1 \dots v_n$ of phases 1 ... n |



Refer to the table for the values

# Format and version




| Ball runner blocks                                     |                                                                                     |                                                                              | Application area                                                                | Load-bearing capacity | Special feature                                                |
|--------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------|---------------------------------------------------------------------------------|-----------------------|----------------------------------------------------------------|
| Standard ball runner block made of steel               |    | <b>FNS</b><br><b>R1651</b> <sup>1)2)5)</sup><br><b>R2001</b> <sup>3)4)</sup> | For high rigidity requirements                                                  | High                  | For bolting from above and below                               |
|                                                        |    | <b>FLS</b><br><b>R1653</b> <sup>1)2)5)</sup><br><b>R2002</b> <sup>3)</sup>   | For the most demanding rigidity requirements                                    | Very high             | For bolting from above and below                               |
|                                                        |    | <b>FKS</b><br><b>R1665</b><br><b>R2000</b> <sup>3)</sup>                     | For restricted space in the longitudinal direction                              | Middle                | For bolting from above and below<br>Supplementary to DIN 645-1 |
|                                                        |    | <b>SNS</b><br><b>R1622</b> <sup>1)2)5)</sup><br><b>R2011</b> <sup>3)4)</sup> | For restricted space in the transverse direction                                | High                  | For mounting from above                                        |
|                                                        |    | <b>SLS</b><br><b>R1623</b> <sup>1)2)5)</sup><br><b>R2012</b> <sup>3)</sup>   | For restricted space in the transverse direction                                | Very high             | For mounting from above                                        |
|                                                        |    | <b>SKS</b><br><b>R1666</b><br><b>R2010</b> <sup>3)</sup>                     | For restricted space in longitudinal and transverse direction                   | Middle                | For mounting from above                                        |
|                                                        |  | <b>SNH</b><br><b>R1621</b> <sup>1)2)5)</sup>                                 | For restricted space in the transverse direction and high rigidity requirements | High                  | Higher rigidity than SNS                                       |
|                                                        |  | <b>SLH</b><br><b>R1624</b> <sup>1)2)5)</sup>                                 | For restricted space in the transverse direction and high rigidity requirements | Very high             | Higher rigidity than SLS                                       |
| Standard Ball Runner Block made of steel and Resist CR |  | <b>FNN</b><br><b>R1693</b> <sup>2)</sup>                                     | For restricted upward space                                                     | High                  | Lower rigidity than FNS<br>Not defined in DIN 645-1            |
|                                                        |  | <b>FKN</b><br><b>R1663</b> <sup>2)</sup>                                     | For restricted upward and longitudinal space                                    | Middle                | Lower rigidity than FKS<br>Not defined in DIN 645-1            |
|                                                        |  | <b>SNN</b><br><b>R1694</b> <sup>2)</sup>                                     | For restricted upward and longitudinal space                                    | High                  | Lower rigidity than SNS<br>Not defined in DIN 645-1            |
|                                                        |  | <b>SKN</b><br><b>R1664</b> <sup>2)</sup>                                     | For restricted space in the upward, longitudinal and transverse direction       | Middle                | Lower rigidity than SKS<br>Not defined in DIN 645-1            |

- 1) Heavy-duty ball runner block
- 2) Ball runner block BSHP
- 3) Resist NR
- 4) Resist NR II
- 5) Resist CR

For short product names of the types, see the product description

| Ball runner blocks                                         |                                                                                     |                               | Application area                                                                                | Load-bearing capacity | Special feature                                 |
|------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------|-------------------------------------------------------------------------------------------------|-----------------------|-------------------------------------------------|
| <b>Super ball runner block made of steel and Resist CR</b> |    | <b>FKS R1661</b>              | For compensating large tolerances in the adjoining structure                                    | Middle                | At least 2 ball runner blocks required per rail |
|                                                            |    | <b>SKS R1662</b>              | For compensating large tolerances in the adjoining structure                                    | Middle                | At least 2 ball runner blocks required per rail |
| <b>Aluminum ball runner block</b>                          |    | <b>FNS R1631<sup>2)</sup></b> | For light-weight construction type<br>For compensating low tolerances with connected structures | High                  | For bolting from above and below                |
|                                                            |    | <b>SNS R1632<sup>2)</sup></b> | For light-weight construction type<br>For compensating low tolerances with connected structures | High                  | For bolting from above                          |
| <b>High-speed ball runner block made of steel</b>          |    | <b>FNS R2001 ... 9.2)</b>     | For maximum travel speeds (up to 10 m/s)                                                        | High                  | For bolting from above and below                |
|                                                            |    | <b>SNS R2011 ... 9.2)</b>     | For maximum travel speeds (up to 10 m/s)                                                        | High                  | For bolting from above                          |
| <b>Wide ball runner block made of steel and Resist CR</b>  |  | <b>BNS R1671<sup>2)</sup></b> | For high torsional moments on rails                                                             | Very high             | For bolting from above and below                |
|                                                            |  | <b>CNS R1672<sup>2)</sup></b> | For high torsional moments on rails with restricted lateral space                               | Very high             | For bolting from above                          |

## Format and version

| Ball guide rails                                                                                                                |                                                                                                                                        | Application area                                                                                       | Fastening type         | Special feature                                                                                                                                                  |
|---------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Standard ball guide rail made of steel</b>  | <b>SNS / SNO</b><br><b>R1605 .3. ..</b><br><b>R1605 .B. ..</b><br><b>R1645 .3. ..<sup>2)</sup></b><br><b>R2045 .3. ..<sup>1)</sup></b> | Standard version,<br>very harsh environments<br>Robust strip clamp                                     | For bolting from above | With cover strip and strip clamp.<br>A single cover for all bores. No end-face bore required for strip clamp.                                                    |
|                                                                                                                                 |                                                       | Harsh environments<br>Compact strip clamp                                                              | For bolting from above | With cover strip and protective cap.<br>A single cover for all bores.                                                                                            |
|                                                                                                                                 |                                                       | Inexpensive                                                                                            | For bolting from above | With plastic caps.<br>No extra space required at the end face.                                                                                                   |
|                                                                                                                                 |                                                       | More resistant to mechanical influences (e.g. shocks)<br>Very harsh environments                       | For bolting from above | With steel caps.<br>No extra space required at the end face.                                                                                                     |
|                                                                                                                                 |                                                       | Easy access to mounting base underside<br>Best sealing action of end seals                             | For bolting from below | Use of larger screws than for bolting from above.<br>Greater side loads permitted.<br>No extra space required at the end face.                                   |
|                                                                                                                                 |                                                                                                                                        |                                                                                                        |                        |                                                                                                                                                                  |
| <b>Wide ball guide rails made of steel</b>    | <b>BNS</b><br><b>R1675 .0. ..</b><br><b>R1673 .0. ..<sup>2)</sup></b>                                                                  | High moment rigidity                                                                                   | For bolting from above | With plastic caps.<br>No extra space required at the end face.                                                                                                   |
|                                                                                                                                 |                                                     | High moment rigidity, more resistant to mechanical influences (e.g. shocks)<br>Very harsh environments | For bolting from above | With steel caps.<br>No extra space required at the end face.                                                                                                     |
|                                                                                                                                 |                                                     | High moment rigidity<br>Best sealing action of end seals                                               | For bolting from below | Use of larger screws than for bolting from above.<br>Larger side loads are permitted than for the single-row series.<br>No extra space required at the end face. |










1) Resist NR II

2) Resist CR

For short product names of the types, see the product description



# Accessories

| <b>Accessories</b><br><b>Connection elements are available as options for the ball runner blocks</b>                      | <b>Application area</b>                                                                                                                                                                                                                                                                                                      |
|---------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Cover plate wiper</b><br>             | The cover plate wiper is an additional element for wiping off coarse particles or dealing with contamination that has been deposited on the ball guide rail.<br>When making your selection, please note whether the ball guide rail is used with or without cover strips.                                                    |
| <b>Front seal</b><br>Two-piece<br>       | The front seal effectively prevents dirt, liquid or small particles from entering the ball runner block. This means that the sealing effect is improved even more.<br>The two-part front seal can also be retrofitted via the ball guide rail.                                                                               |
| <b>FKM seal</b><br>One and two-piece<br> | Better sealing effect than front seal but higher friction. Used for very heavy contamination, cooling lubricants or aggressive media.<br>Chemical and temperature resistant.                                                                                                                                                 |
| <b>Seal kit</b><br>                      | When using cover plate wiper and front seal simultaneously, the seal kit is recommended.                                                                                                                                                                                                                                     |
| <b>Lubrication adapter</b><br>           | For oil and grease lubrication from above for ball runner blocks SNH and SLH (high versions).                                                                                                                                                                                                                                |
| <b>Lubrication plate</b><br>            | Enables further variations for lubrication of ball runner blocks.<br>Available for lube connection with metric thread or pipe thread.                                                                                                                                                                                        |
| <b>Front lube unit</b><br>             | For applications requiring very long relubrication intervals. They allow travel distances of up to 25,000 km without relubrication under normal loads. The function is only assured where there is no exposure to liquids and little contamination. The maximum operating temperature is 60 °C.                              |
| <b>Bellows</b><br>                     | Bellows are available in various versions, with or without lubrication plate.<br>Bellows in heat-resistant design are metalized on one side and are therefore not flammable, resistant to sparks, welding spatter or hot chips. Temperature stability briefly up to 200 °C and operating temperature of 80 °C possible.      |
| <b>Clamping and braking units</b><br>  | Clamping units can be used to secure the ball rail system against displacement in the static state. With braking units, the ball rail system can be braked in the dynamic state and secured against displacement in the resting state. The following versions are available: Hydraulic, pneumatic and manual clamping units. |

# System preload

## Definition of preload

Ball runner blocks can be preloaded to increase rigidity. The internal preload forces that occur in this connection must be considered in the life expectancy calculation. You can choose the preload class to match the area of application. Refer to the table for preload force  $F_{pr}$ .

### Example

- ▶ Area of application: Precise guide systems with low external load and high overall rigidity requirements. This results in preload class C1.
- ▶ Selected ball runner block FNS R1651 314 20
- ▶ The selected ball runner block yields a preload force  $F_{pr}$  according to the table.
- ▶ It is installed at 840 N internal preload force  $F_{pr}$ .

| Code                   | Preload                            | Application area                                                                                                                                                                                                                                                                                                       |
|------------------------|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>C0<sup>1)</sup></b> | <b>Without preload (clearance)</b> | For particularly smooth-running guide systems with the lowest possible friction for applications with large installation tolerances.<br>Clearance versions are available only in accuracy classes N and H.                                                                                                             |
| <b>C1</b>              | <b>Moderate preload</b>            | For precise guide systems with low external loads and high demands on overall rigidity.                                                                                                                                                                                                                                |
| <b>C2</b>              | <b>Medium preload</b>              | For precise guide systems with both high external loading and high demands on overall rigidity; also recommended for single-rail systems.<br>Above average moment loads can be absorbed without significant elastic deformation.<br>Further improved overall rigidity with only medium moment loads.                   |
| <b>C3</b>              | <b>High preload</b>                | For highly rigid guide systems, e.g. precision tooling machines etc.<br>Above-average loads and moments are caught with the lowest possible elastic deformation.<br>Ball runner blocks with preload C3 only available in accuracy classes UP, SP and XP, heavy duty ball runner blocks only available in UP, SP and P. |

1) In the case of ball runner blocks without preload (preload class C0), there is a clearance between the ball runner block and the rail of 1 to 10 µm. When using two rails and more than one ball runner block per rail, this clearance is usually equalized by parallelism tolerances.

**Preload force  $F_{pr}$** 

| Ball runner blocks                                                                                                                                            | Material numbers                          | Format | Preload class    | Size                       |       |       |       |       |        |        |        |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|--------|------------------|----------------------------|-------|-------|-------|-------|--------|--------|--------|--|
|                                                                                                                                                               |                                           |        |                  | 15                         | 20    | 25    | 30    | 35    | 45     | 55     | 65     |  |
|                                                                                                                                                               |                                           |        |                  | Preload force $F_{pr}$ (N) |       |       |       |       |        |        |        |  |
| <b>Standard ball runner blocks</b><br><b>Heavy-duty ball runner blocks</b><br>- Steel <sup>3)</sup><br>- Resist NR <sup>4)</sup><br>- Resist CR <sup>6)</sup> | R1651 <sup>3)6)</sup> R2001 <sup>4)</sup> | FNS    | C1 <sup>1)</sup> | 160                        | 380   | 460   | 630   | 840   | 1 360  | 1 960  | 2 460  |  |
|                                                                                                                                                               | R1622 <sup>3)6)</sup> R2011 <sup>4)</sup> | SNS    | C1 <sup>2)</sup> | 150                        | 350   | 430   | 590   | 840   | 1 270  |        |        |  |
|                                                                                                                                                               | R1621 <sup>3)6)</sup>                     | SNH    | C2 <sup>1)</sup> | 620                        | 1 500 | 1 820 | 2 540 | 3 350 | 5 450  | 7 860  | 9 840  |  |
|                                                                                                                                                               |                                           |        | C2 <sup>2)</sup> | 580                        | 1 390 | 1 700 | 2 340 | 3 350 | 5 060  |        |        |  |
|                                                                                                                                                               |                                           |        | C3 <sup>1)</sup> | 1 010                      | 2 440 | 2 960 | 4 120 | 5 450 | 8 850  | 12 800 | 16 000 |  |
|                                                                                                                                                               |                                           |        | C3 <sup>2)</sup> | 950                        | 2 260 | 2 770 | 3 810 | 5 450 | 8 230  |        |        |  |
|                                                                                                                                                               | R1653 <sup>3)6)</sup> R2002 <sup>4)</sup> | FLS    | C1 <sup>1)</sup> | 200                        | 490   | 610   | 800   | 1 110 | 1 810  | 2 480  | 3 260  |  |
|                                                                                                                                                               | R1623 <sup>3)6)</sup> R2012 <sup>4)</sup> | SLS    | C1 <sup>2)</sup> | 180                        | 460   | 550   | 760   | 1 060 | 1 640  |        |        |  |
|                                                                                                                                                               | R1624 <sup>3)6)</sup>                     | SLH    | C2 <sup>1)</sup> | 800                        | 1 950 | 2 430 | 3 200 | 4 450 | 7 230  | 9 940  | 13 000 |  |
|                                                                                                                                                               |                                           |        | C2 <sup>2)</sup> | 720                        | 1 850 | 2 200 | 3 040 | 4 240 | 6 550  |        |        |  |
|                                                                                                                                                               |                                           |        | C3 <sup>1)</sup> | 1 300                      | 3 170 | 3 950 | 5 200 | 7 230 | 11 800 | 16 100 | 21 200 |  |
|                                                                                                                                                               |                                           |        | C3 <sup>2)</sup> | 1 170                      | 3 000 | 3 580 | 4 940 | 6 890 | 10 600 |        |        |  |
| <b>Standard ball runner blocks</b><br>- Steel <sup>3)</sup><br>- Resist NR <sup>4)</sup><br>- Resist CR <sup>6)</sup>                                         | R1665 <sup>3)6)</sup> R2000 <sup>4)</sup> | FKS    | C1 <sup>1)</sup> | 110                        | 250   | 320   | 440   | 590   |        |        |        |  |
|                                                                                                                                                               | R1666 <sup>3)6)</sup> R2010 <sup>4)</sup> | SKS    | C1 <sup>2)</sup> | 90                         | 250   | 280   | 440   | 590   |        |        |        |  |
|                                                                                                                                                               | R1693 <sup>3)6)</sup>                     | FNN    | C1 <sup>1)</sup> |                            | 290   | 460   |       |       |        |        |        |  |
|                                                                                                                                                               | R1694 <sup>3)6)</sup>                     | SNN    |                  |                            |       |       |       |       |        |        |        |  |
|                                                                                                                                                               | R1663 <sup>3)6)</sup>                     | FKN    | C1 <sup>1)</sup> |                            | 190   | 320   |       |       |        |        |        |  |
| <b>Super ball runner blocks</b><br>- Steel <sup>3)</sup><br>- Resist CR <sup>6)</sup>                                                                         | R1661 <sup>3)6)</sup>                     | FKS    | C1 <sup>1)</sup> | 80                         | 200   | 230   | 320   | 420   |        |        |        |  |
|                                                                                                                                                               | R1662 <sup>3)6)</sup>                     | SKS    |                  |                            |       |       |       |       |        |        |        |  |
| <b>Standard high speed ball runner blocks</b><br>- Steel                                                                                                      | R2001...9. R1651 <sup>7)</sup>            | FNS    | C2 <sup>1)</sup> | 420                        | 1 020 | 1 240 | 1 720 | 2 280 | 3 710  | 5 350  |        |  |
|                                                                                                                                                               | R2011...9. R1622 <sup>7)</sup>            | SNS    |                  |                            |       |       |       |       |        |        |        |  |
|                                                                                                                                                               | R2002...9. R1653 <sup>8)</sup>            | FLS    | C2 <sup>1)</sup> | 700                        | 1 330 | 1 660 | 2 180 | 3 020 | 4 930  | 6 770  | 13 000 |  |
|                                                                                                                                                               | R2012...9. R1623 <sup>8)</sup>            | SLS    |                  |                            |       |       |       |       |        |        |        |  |
| <b>Standard ball runner blocks</b><br>- Aluminum                                                                                                              | R1631                                     | FNS    | C1 <sup>1)</sup> | 160                        | 380   | 460   | 630   | 840   |        |        |        |  |
|                                                                                                                                                               | R1632                                     | SNS    | C1 <sup>2)</sup> | 150                        | 350   | 430   | 590   | 840   |        |        |        |  |
| <b>Standard ball runner blocks</b><br>- Resist NR II <sup>5)</sup>                                                                                            | R2001...0.                                | FNS    | C1 <sup>1)</sup> | 100                        | 250   | 300   | 420   | 550   |        |        |        |  |
|                                                                                                                                                               | R2011...0.                                | SNS    | C1 <sup>2)</sup> | 90                         | 230   | 280   | 390   | 550   |        |        |        |  |
|                                                                                                                                                               |                                           |        | C2 <sup>1)</sup> | 410                        | 980   | 1 200 | 1 660 | 2 210 |        |        |        |  |
|                                                                                                                                                               |                                           |        | C2 <sup>2)</sup> | 380                        | 910   | 1 120 | 1 540 | 2 210 |        |        |        |  |
|                                                                                                                                                               | R2002...0.<br>R2012...0.                  | FLS    | C1 <sup>1)</sup> | 170                        | 320   | 400   | 530   | 730   |        |        |        |  |
|                                                                                                                                                               |                                           |        | C1 <sup>2)</sup> | 150                        | 300   | 360   | 500   | 700   |        |        |        |  |
|                                                                                                                                                               |                                           |        | C2 <sup>1)</sup> | 680                        | 1 280 | 1 600 | 2 100 | 2 920 |        |        |        |  |
|                                                                                                                                                               |                                           |        | C2 <sup>2)</sup> | 610                        | 1 220 | 1 450 | 2 000 | 2 780 |        |        |        |  |
|                                                                                                                                                               | R2000...0.<br>R2010...0.                  | FKS    | C1 <sup>1)</sup> | 90                         | 160   | 210   | 290   | 390   |        |        |        |  |
|                                                                                                                                                               |                                           |        | C1 <sup>2)</sup> | 80                         | 160   | 180   | 290   | 390   |        |        |        |  |
| <b>Wide ball runner blocks</b><br>- Steel <sup>3)</sup><br>- Resist CR <sup>6)</sup>                                                                          | R1671 <sup>3)6)</sup>                     | CNS    | C1 <sup>1)</sup> |                            | 270   | 580   |       | 1 160 |        |        |        |  |
|                                                                                                                                                               |                                           |        | C1 <sup>2)</sup> |                            | 260   | 550   |       |       |        |        |        |  |
|                                                                                                                                                               | R1672 <sup>3)6)</sup>                     | BNS    | C1 <sup>1)</sup> |                            | 270   | 580   |       |       |        |        |        |  |
|                                                                                                                                                               |                                           |        | C1 <sup>2)</sup> |                            | 260   | 550   |       |       |        |        |        |  |

1) Ball runner block **without** ball chain.2) Ball runner block **with** ball chain.

3) Steel: All steel parts made of carbon steel.

4) Resist NR size 15 - 35: Ball runner block body made of corrosion-resistant steel as per DIN EN 10088.

5) Resist NR II: All steel components are made from corrosion-resistant steel in accordance with DIN EN 10088.

6) Resist CR: Steel ball runner block body with corrosion-resistant coating, matte-silver finish, hard chrome plated.

7) Size 55

8) Sizes 55 - 65

# Rigidity ball runner block

Due to the large number of variants only one type is listed. Further rigidity diagrams are available on request.

## Rigidity of the ball rail system with preload


### Example

#### Ball runner block FNS

#### Flange, normal, standard height

Size 35:

- a) Ball runner block R1651 31. 20  
for preload C1
- b) Ball runner block R1651 32. 20  
for preload C2
- c) Ball runner block R1651 33. 20  
for preload C3

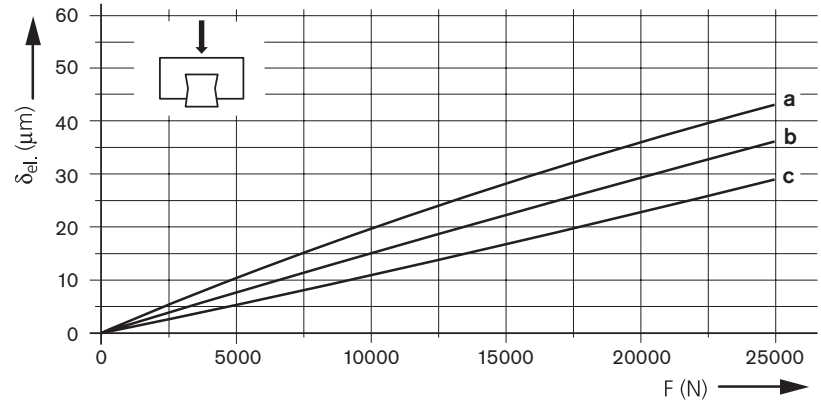


### Example

#### Ball runner block FLS

#### Flange, long, standard height

Size 35:

- a) Ball runner block R1653 31. 20  
for preload C1
- b) Ball runner block R1653 32. 20  
for preload C2
- c) Ball runner block R1653 33. 20  
for preload C3

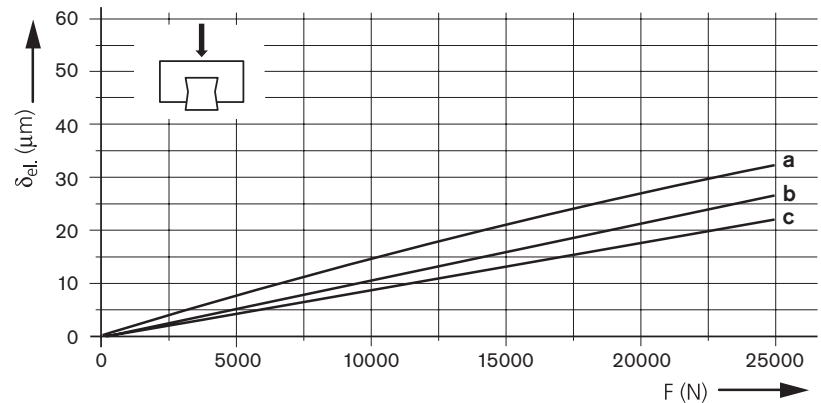

### Rigidity of the ball rail system with preload


#### Example

##### Ball runner block SNS

##### Slimline, normal, standard height

Size 35:

- a) Ball runner block R1622 31. 20  
for preload C1
- b) Ball runner block R1622 32. 20  
for preload C2
- c) Ball runner block R1622 33. 20  
for preload C3

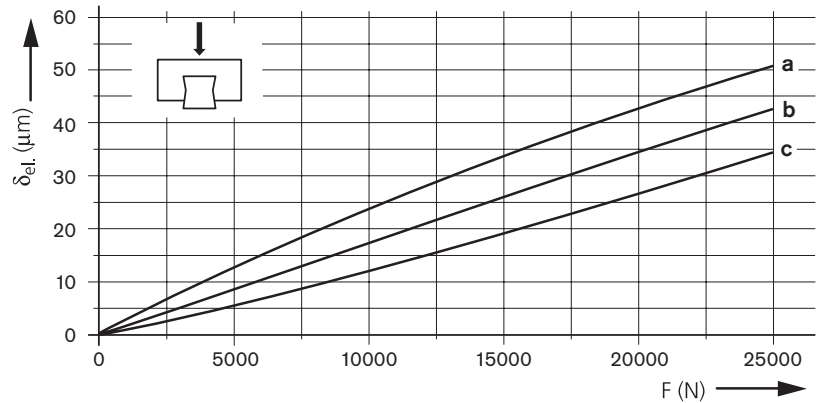


#### Example

##### Ball runner block SLS

##### Slimline, long, standard height

Size 35:

- a) Ball runner block R1623 31. 20  
for preload C1
- b) Ball runner block R1623 32. 20  
for preload C2
- c) Ball runner block R1623 33. 20  
for preload C3

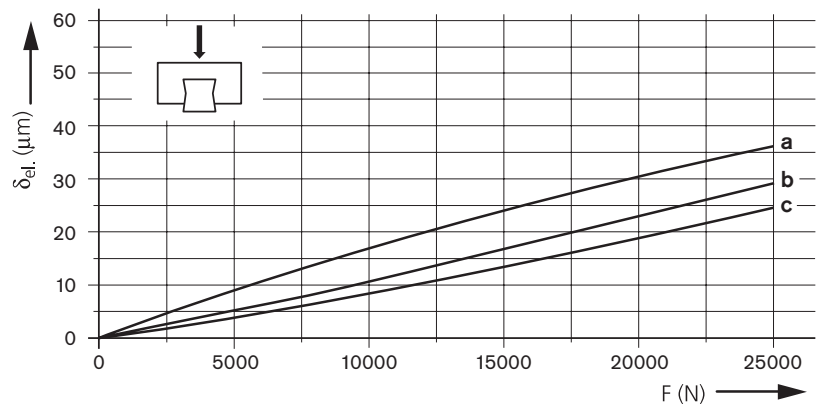

#### Preload

C1/C2/C3 = In accordance with table for  
preload force  $F_{pr}$


#### Key

$\delta_{el}$  = Elastic deformation (μm)  
F = Load (N)

## Accuracy classes

### Accuracy classes and their tolerances

Ball rail systems are available in six accuracy classes for ball runner blocks and five for ball guide rails. For details of the available ball runner blocks and ball guide rails, see the "Material numbers" tables.

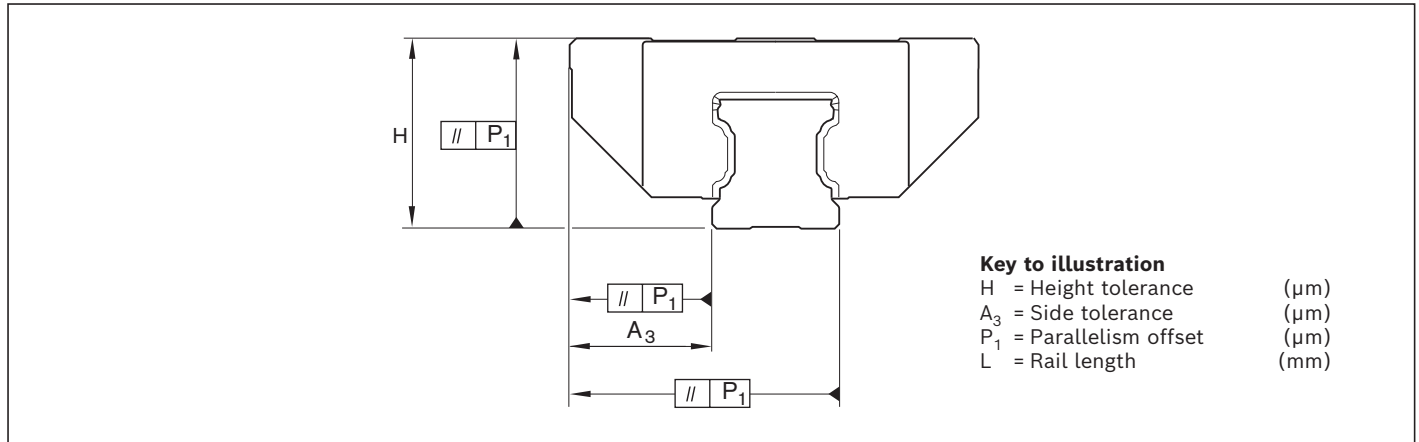

### Precision manufacturing process makes interchangeability easy

Rexroth manufactures its ball guide rails and ball runner blocks with such high precision, especially in the ball raceway zone, that each individual component element is fully interchangeable. For example, a ball runner block can be used without problems on various ball guide rails of the same size. Similarly, different ball runner blocks can also be used on one and the same ball guide rail.

| Designation      | Definition                                                                                                                                   | Figure | Example H |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------|--------|-----------|
| $\Delta H_{abs}$ | Tolerance of dimension H measured in middle of runner block for any combination of runner blocks and guide rails over the entire rail length |        | ±40µm     |
| $\Delta H_{rel}$ | Maximum difference in dimension H measured in middle of runner block for different runner blocks at the same rail position                   |        | 15µm      |

| Designation        | Definition                                                                                                                                                | Figure | Example H |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-----------|
| $\Delta A_{3 abs}$ | Tolerance of dimension A <sub>3</sub> measured in middle of runner block for any combination of runner blocks and guide rails over the entire rail length |        | ±20µm     |
| $\Delta A_{3 rel}$ | Maximum difference in dimension A <sub>3</sub> measured in middle of runner block for different runner blocks at the same rail position                   |        | 15µm      |

**Ball rail system made of steel, aluminum, Resist NR and Resist NR II**

| Accuracy classes       | Tolerances of the dimensions (μm) |                    | $\Delta H_{rel}$ , $\Delta A_{3 rel}$ |
|------------------------|-----------------------------------|--------------------|---------------------------------------|
|                        | $\Delta H_{abs}$                  | $\Delta A_{3 abs}$ |                                       |
| <b>N</b>               | ±100                              | ±40                | 30                                    |
| <b>H</b>               | ±40                               | ±20                | 15                                    |
| <b>P</b>               | ±20                               | ±10                | 7                                     |
| <b>XP<sup>1)</sup></b> | ±11                               | ±8                 | 7                                     |
| <b>SP</b>              | ±10                               | ±7                 | 5                                     |
| <b>UP</b>              | ±5                                | ±5                 | 3                                     |

1) Ball runner block with accuracy class XP, ball guide rail with accuracy class SP

**Ball rail system, Resist CR, matte-silver, hard chrome plated**


| Accuracy classes | Tolerances of the dimensions (μm) |                 |                                   |                 | $\Delta H_{rel}, \Delta A_{3rel}$ |                 |
|------------------|-----------------------------------|-----------------|-----------------------------------|-----------------|-----------------------------------|-----------------|
|                  | $\Delta H_{abs}$                  |                 | $\Delta A_{3abs}$                 |                 |                                   |                 |
|                  | Ball runner block/ball guide rail | Ball guide rail | Ball runner block/ball guide rail | Ball guide rail | Ball runner block/ball guide rail | Ball guide rail |
| <b>H</b>         | +47<br>-38                        | +44<br>-39      | ±23                               | +19<br>-24      | 18                                | 15              |

## Accuracy classes

### Parallelism offset $P_1$ of the ball rail system in operation

Values measured at middle of runner block with ball rail systems without surface coating.

For hard chrome plated ball guide rails Resist CR, the values can increase up to 2  $\mu\text{m}$ .

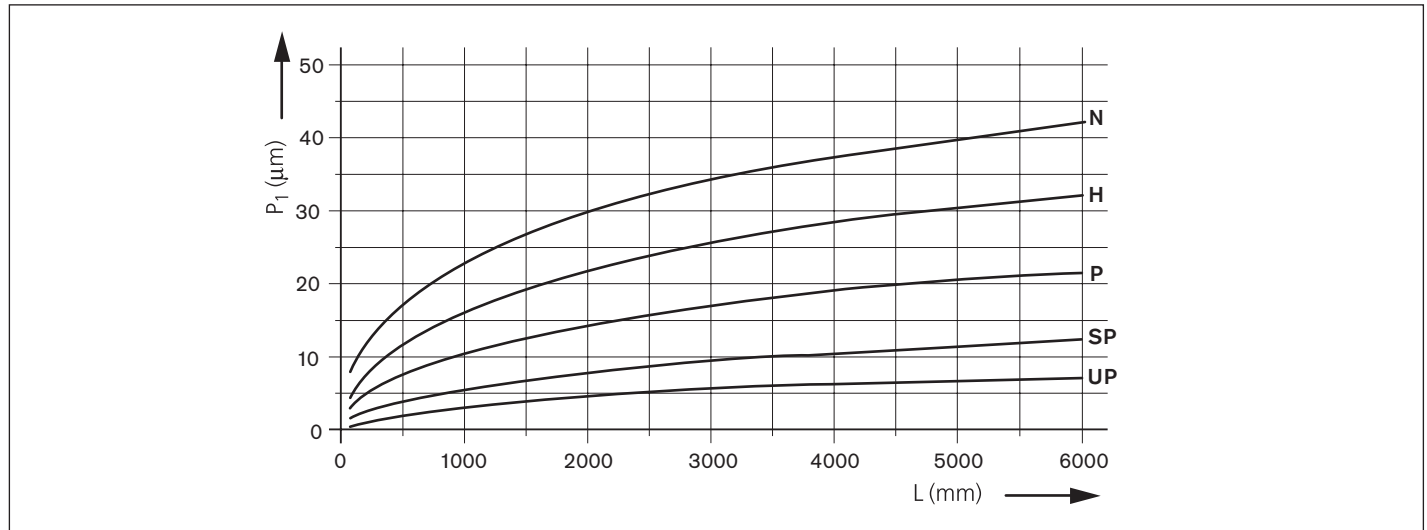

### Tolerances for combination of accuracy classes

| Ball runner blocks |                                                   |                   | Ball guide rails       |                        |                        |                         |                         |
|--------------------|---------------------------------------------------|-------------------|------------------------|------------------------|------------------------|-------------------------|-------------------------|
|                    |                                                   |                   | N<br>( $\mu\text{m}$ ) | H<br>( $\mu\text{m}$ ) | P<br>( $\mu\text{m}$ ) | SP<br>( $\mu\text{m}$ ) | UP<br>( $\mu\text{m}$ ) |
| N                  | $\Delta H_{\text{abs}}$                           | ( $\mu\text{m}$ ) | $\pm 100$              | $\pm 48$               | $\pm 32$               | $\pm 23$                | $\pm 19$                |
|                    | $\Delta A_{3 \text{ abs}}$                        | ( $\mu\text{m}$ ) | $\pm 40$               | $\pm 28$               | $\pm 22$               | $\pm 20$                | $\pm 19$                |
|                    | $\Delta H_{\text{rel}}, \Delta A_{3 \text{ rel}}$ | ( $\mu\text{m}$ ) | 30                     | 30                     | 30                     | 30                      | 30                      |
| H                  | $\Delta H_{\text{abs}}$                           | ( $\mu\text{m}$ ) | $\pm 92$               | $\pm 40$               | $\pm 24$               | $\pm 15$                | $\pm 11$                |
|                    | $\Delta A_{3 \text{ abs}}$                        | ( $\mu\text{m}$ ) | $\pm 32$               | $\pm 20$               | $\pm 14$               | $\pm 12$                | $\pm 11$                |
|                    | $\Delta H_{\text{rel}}, \Delta A_{3 \text{ rel}}$ | ( $\mu\text{m}$ ) | 15                     | 15                     | 15                     | 15                      | 15                      |
| P                  | $\Delta H_{\text{abs}}$                           | ( $\mu\text{m}$ ) | $\pm 88$               | $\pm 36$               | $\pm 20$               | $\pm 11$                | $\pm 7$                 |
|                    | $\Delta A_{3 \text{ abs}}$                        | ( $\mu\text{m}$ ) | $\pm 28$               | $\pm 16$               | $\pm 10$               | $\pm 8$                 | $\pm 7$                 |
|                    | $\Delta H_{\text{rel}}, \Delta A_{3 \text{ rel}}$ | ( $\mu\text{m}$ ) | 7                      | 7                      | 7                      | 7                       | 7                       |
| XP                 | $\Delta H_{\text{abs}}$                           | ( $\mu\text{m}$ ) | $\pm 88$               | $\pm 36$               | $\pm 20$               | $\pm 11$                | $\pm 7$                 |
|                    | $\Delta A_{3 \text{ abs}}$                        | ( $\mu\text{m}$ ) | $\pm 28$               | $\pm 16$               | $\pm 10$               | $\pm 8$                 | $\pm 7$                 |
|                    | $\Delta H_{\text{rel}}, \Delta A_{3 \text{ rel}}$ | ( $\mu\text{m}$ ) | 7                      | 7                      | 7                      | 7                       | 7                       |
| SP                 | $\Delta H_{\text{abs}}$                           | ( $\mu\text{m}$ ) | $\pm 87$               | $\pm 35$               | $\pm 19$               | $\pm 10$                | $\pm 6$                 |
|                    | $\Delta A_{3 \text{ abs}}$                        | ( $\mu\text{m}$ ) | $\pm 27$               | $\pm 15$               | $\pm 9$                | $\pm 7$                 | $\pm 6$                 |
|                    | $\Delta H_{\text{rel}}, \Delta A_{3 \text{ rel}}$ | ( $\mu\text{m}$ ) | 5                      | 5                      | 5                      | 5                       | 5                       |
| UP                 | $\Delta H_{\text{abs}}$                           | ( $\mu\text{m}$ ) | $\pm 86$               | $\pm 34$               | $\pm 18$               | $\pm 9$                 | $\pm 5$                 |
|                    | $\Delta A_{3 \text{ abs}}$                        | ( $\mu\text{m}$ ) | $\pm 26$               | $\pm 14$               | $\pm 8$                | $\pm 6$                 | $\pm 5$                 |
|                    | $\Delta H_{\text{rel}}, \Delta A_{3 \text{ rel}}$ | ( $\mu\text{m}$ ) | 3                      | 3                      | 3                      | 3                       | 3                       |

### Recommendations for combining accuracy classes

Recommended with **relatively large ball runner block distances** and long strokes:

Ball guide rail in higher accuracy class than ball runner blocks.

Recommended with **small ball runner block distances** and short strokes:

Ball runner blocks in higher accuracy class than ball guide rail.

### Travel accuracy selection criterion


By means of perfected ball inlet and outlet zones in the ball runner blocks and the optimized pitch of the fastening bores in the ball guide rails, a very high travel accuracy with lowest pulsation is achieved. Particularly suitable for highly precise, chipping processing, measuring technique, high-precision scanners, eroding technology etc. (See chapter Product Description High-precision ball runner block BSHP made of steel, Application examples)



## Ball chain

Rexroth recommends the ball chain especially for applications where a low noise level is required.

Ball runner blocks including ball chain (1) are available as an option. The ball chain prevents the balls from colliding with each other and helps to achieve a calmer and smoother running. A lower noise level is achieved. Due to the smaller number of load-bearing balls in the ball runner block with ball chain, lower load capacities and load moments can result ("Product overview with load capacities and load moments").

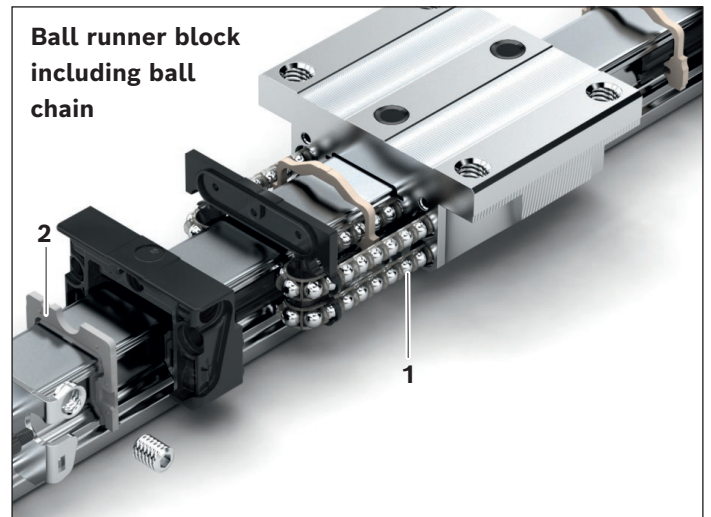

## Seals

The sealing plate on the end face (2) protects the interior of the ball runner block against dirt, chips and fluids. Additionally, it prevents the discharge of lubricant. Due to the optimized form of the sealing lips, the occurring friction is reduced to a minimum. Sealing plates are optionally available with black standard seals (SS), beige low-friction seals (LS) or green double-lip seals (DS).

**Low-friction seal (LS)** (seal with very low friction)

For special requirements with regard to ease of movement and reduced lubricant application, the low-friction seal has been developed. It consists of an open-pored polyurethane foam and features only limited wiping action.

**Standard seal (SS)** (universal sealing with good sealing effect)



For most application cases, the standard seal is suitable. It comprises of a good wiping action but also enables long relubrication intervals.

**Double-lip seal (DS)** (sealing with very good sealing effect)

For applications in which the rail guide is heavily charged with chips, wood dust, cooling lubricants etc., Rexroth recommends the double-lip seal. It comprises an excellent wiping action but a greater friction force and lower relubrication interval.

### Sealing effect and displacement resistance

The displacement resistance can be impacted by the geometry and the material. The diagram shows the effects of different sealing versions on the sealing effect and the displacement resistance.

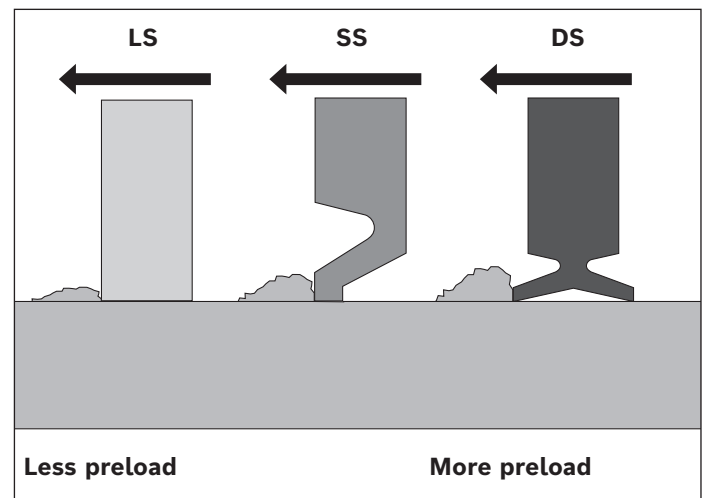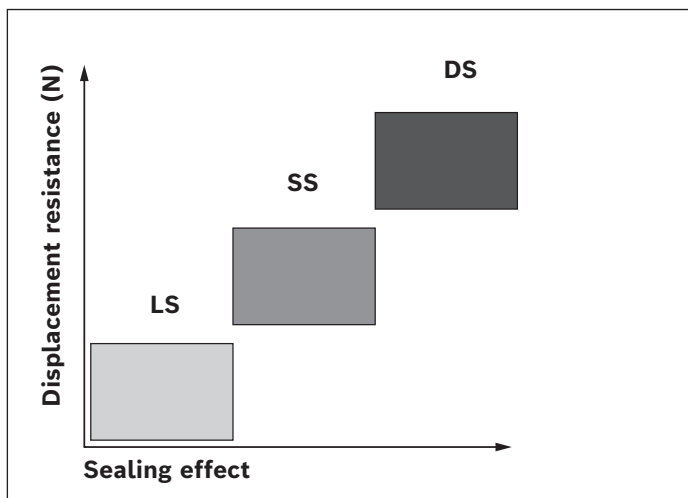


# Materials

Rexroth offers ball runner blocks made of different materials for the different requirements in the various applications.

## A Standard ball runner block made of steel

The most widely used carbon steel version.


Low-cost variant, but does not provide protection against corrosion. Is usually sufficient for general mechanical engineering.



## B High-speed ball runner block made of steel

In this variant, compared to the standard ball runner block made of steel, the steel balls are replaced by ceramic balls, or in case of size 65 by steel balls with pulse-reducing ball circulation. Due to the lower density of the ceramic balls or due to the pulse-reducing circulation of the steel ball, the same forces result in the deflections of the ball circulations at the increased permissible speed. As a result, even at speeds of up to 10 m/s (or 5 m/s at size 65 with steel ball), the expected service life is not reduced.


In comparison with the standard version, the load capacities and load moments of the ball runner blocks with ceramic balls are slightly reduced.



## Limited corrosion-resistant ball runner blocks

### C Aluminum ball runner block

The ball runner block body consists of a wrought aluminum alloy. Balls, steel bearing plate and frontal fixing screws are made of carbon steel. The ball runner blocks have the same load capacities as the standard version. As the yield point of aluminum is lower than that of steel, the maximum load capacity of the ball runner blocks is limited by  $F_{max}$  and  $M_{max}$ . Most cost-effective alternative with limited corrosion protection.



## Corrosion-resistant ball runner blocks

### D Resist NR

The ball runner block body is made of corrosion-resistant material. Offers limited corrosion protection. Balls, steel bearing plate and frontal fixing screws are made of carbon steel. The ball runner blocks have the same basic load capacities and load moments as the standard version.

Rexroth recommends this version for applications requiring corrosion protection. Fast delivery.

### E Resist NR II


All parts of the ball runner block are made of corrosion-resistant material. These ball runner blocks offer the greatest possible protection against corrosion with only slightly reduced load capacities and load moments.

### F Resist CR

The ball runner block body is coated with a corrosion-resistant coating, matte-silver, hard chrome plated. Balls, steel bearing plate and frontal fixing screws are made of carbon steel. The ball runner blocks have the same basic load capacities and load moments as the standard version. Alternative if the NR version is not available.

| Suitability of corrosion protection | CR  | ZnFe | NR |
|-------------------------------------|-----|------|----|
| High humidity                       | ++  | +++  | +  |
| Salty air                           | +   | ++   | +  |
| Light acids                         | +   | +    | 0  |
| Light bases                         | +   | +    | +  |
| Abrasive wear                       | +++ | 0    | +  |
| Load-bearing capacity               | +++ | +++  | ++ |

## Material specifications

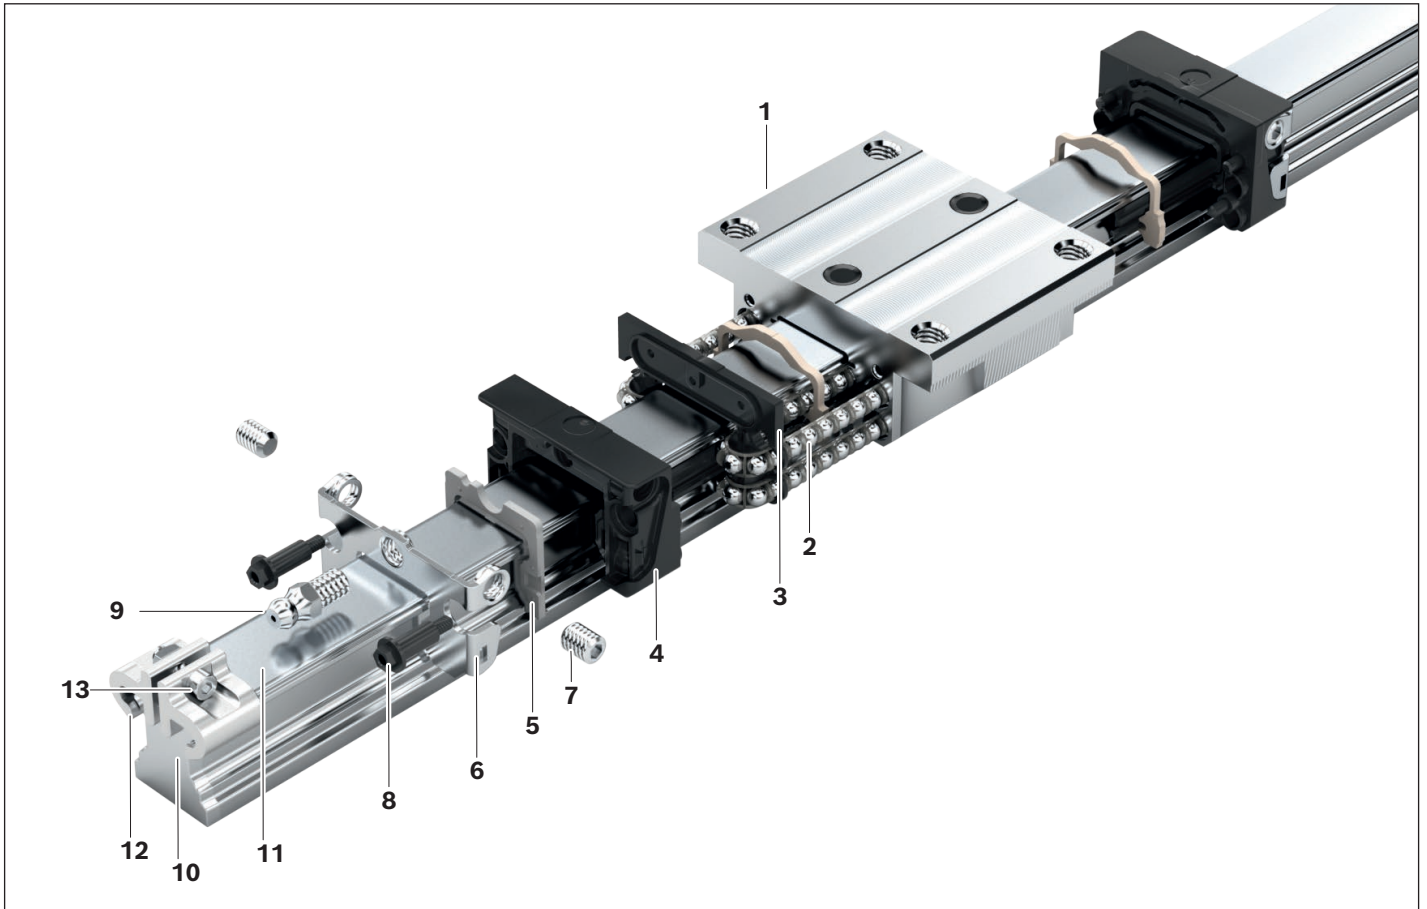

| Item | Component               | Ball runner blocks               |                                                                           |                             |                                  |                                  |                                       |
|------|-------------------------|----------------------------------|---------------------------------------------------------------------------|-----------------------------|----------------------------------|----------------------------------|---------------------------------------|
|      |                         | A<br>Steel                       | B<br>Steel (high-speed)                                                   | C<br>Aluminum               | D<br>Resist NR                   | E<br>Resist NR II                | F<br>Resist CR                        |
| 1    | Ball runner block body  | Heat-treated steel               | Heat-treated steel                                                        | Wrought aluminum alloy      | Corrosion-resistant steel 1.4122 | Corrosion-resistant steel 1.4122 | Hard chrome-plated heat-treated steel |
| 2    | Balls                   | Anti-friction bearing steel      | Si <sub>3</sub> N <sub>4</sub> , anti-friction bearing steel (at size 65) | Anti-friction bearing steel | Anti-friction bearing steel      | Corrosion-resistant steel 1.4112 | Anti-friction bearing steel           |
| 3    | Diversion plate         | Plastic TEE-E                    |                                                                           |                             |                                  |                                  |                                       |
| 4    | Ball guide              | Plastic strip POM (PA6.6)        |                                                                           |                             |                                  |                                  |                                       |
| 5    | Sealing plate           | Plastic TEE-E                    |                                                                           |                             |                                  |                                  |                                       |
| 6    | Thread plate            | Corrosion-resistant steel 1.4306 |                                                                           |                             |                                  |                                  |                                       |
| 7    | Set screws              | Corrosion-resistant steel 1.4301 |                                                                           |                             |                                  |                                  |                                       |
| 8    | Flanged screws          | Carbon steel                     |                                                                           |                             |                                  | Corrosion-resistant steel 1.4303 | Carbon steel                          |
| 9    | Lube nipple             |                                  |                                                                           |                             |                                  | Corrosion-resistant steel 1.4305 |                                       |
| Item | Component               | Ball guide rail                  |                                                                           |                             |                                  |                                  |                                       |
| 10   | Ball guide rail         | Heat-treated steel               |                                                                           |                             |                                  | Corrosion-resistant steel 1.4116 | Heat-treated steel                    |
| 11   | Cover strip             | Corrosion-resistant steel 1.4310 |                                                                           |                             |                                  |                                  |                                       |
| 12   | Strip clamp             | Aluminum, anodized               |                                                                           |                             |                                  |                                  |                                       |
| 13   | Clamping screw with nut | Corrosion-resistant steel 1.4301 |                                                                           |                             |                                  |                                  |                                       |

# Product description

## Characteristic features

- ▶ The same high load capacities in all four main directions of loading
- ▶ Low noise level and outstanding travel behavior
- ▶ Excellent dynamic characteristics:  
Travel speed:  $v_{\max} = 5 \text{ m/s}$   
Acceleration:  $a_{\max} = 500 \text{ m/s}^2$
- ▶ Long-term lubrication is possible over several years
- ▶ Minimum quantity lubrication system with integrated reservoir for oil lubrication<sup>1)</sup>
- ▶ Lube fittings with metal threads on all sides<sup>1)</sup>
- ▶ Limitless interchangeability as all ball guide rail systems can be combined at will with all ball runner block versions within each accuracy class.
- ▶ Maximum system rigidity due to preloaded O-arrangement
- ▶ Optional integrated, inductive and wear-free measuring system
- ▶ First-class logistics unique worldwide thanks to universal interchangeability of the components within any accuracy class
- ▶ Attachments on the ball runner block can be mounted from above and below<sup>1)</sup>
- ▶ Improved rigidity under lift-off and side loading conditions due to two additional mounting screw holes at the center of the ball runner block<sup>1)</sup>
- ▶ Wide range of accessories
- ▶ End-face fastening thread for all attachments

## Further highlights


- ▶ High rigidity in all directions of loading – permits applications with just one runner block per rail
- ▶ Integrated all-round sealing
- ▶ High torque load capacity
- ▶ Optimized entry-zone geometry and high number of balls minimize variation in elastic deflection
- ▶ Quiet, smooth running thanks to optimally designed ball and ball chain return and guideway
- ▶ Different preload classes
- ▶ Ball runner block pre-lubricated at the factory<sup>1)</sup>
- ▶ Optionally available with ball chain<sup>1)</sup>

## Corrosion protection (optional)<sup>1)</sup>

- ▶ Resist NR:  
Ball runner block body made of corrosion-resistant steel as per DIN EN 10088
- ▶ Resist NR II:  
Ball runner block body and ball guide rail as well as all steel parts made of corrosion-resistant steel in accordance with DIN EN 10088
- ▶ Resist CR:  
Ball runner block body or ball guide rail made of steel with corrosion-resistant coating, matte-silver finish, hard chrome plated

1) Type-dependent

**Ball rail system with steel  
ball runner block FNS  
(components and assembly)**

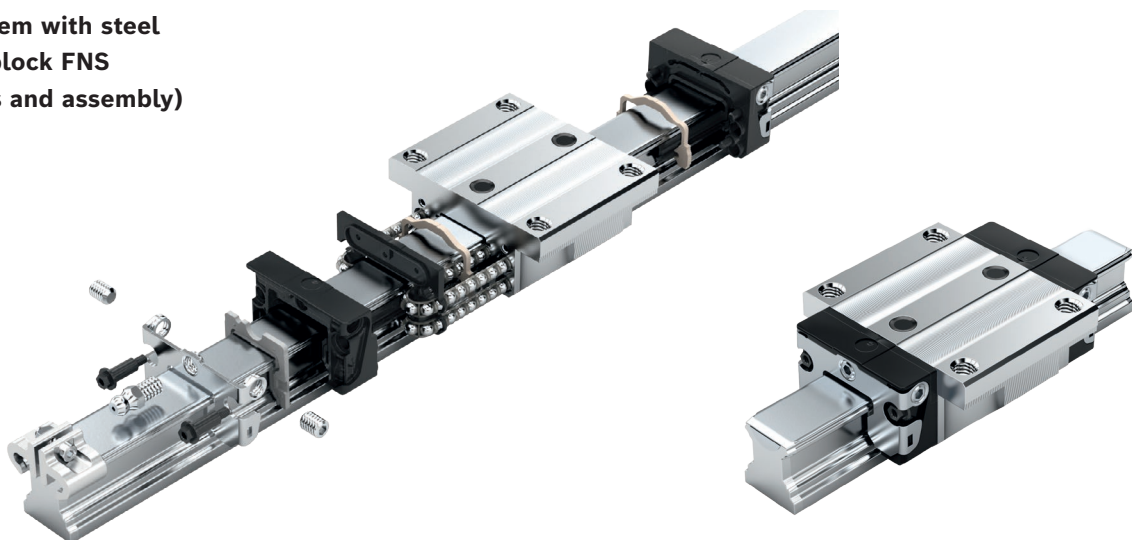


**Highlights of the ball runner blocks BSHP**

- ▶ Further increased travel accuracy up to a factor of six
- ▶ Significantly reduced frictional oscillations and low friction force level, particularly under external load
- ▶ Maximum precision
- ▶ Selected qualities
- ▶ Minimum quantity preservation in the accuracy classes XP; SP; UP.  
(Impairment of the environment is reduced by the preservative agent)
- ▶ Patented entry zone increases the travel accuracy
- ▶ All other advantages of Rexroth precision ball runner blocks integrated

## Comparison

**Conventional ball runner blocks**

If the ball runner block comprises of a conventional entry zone, this may only be designed for a specific load point.

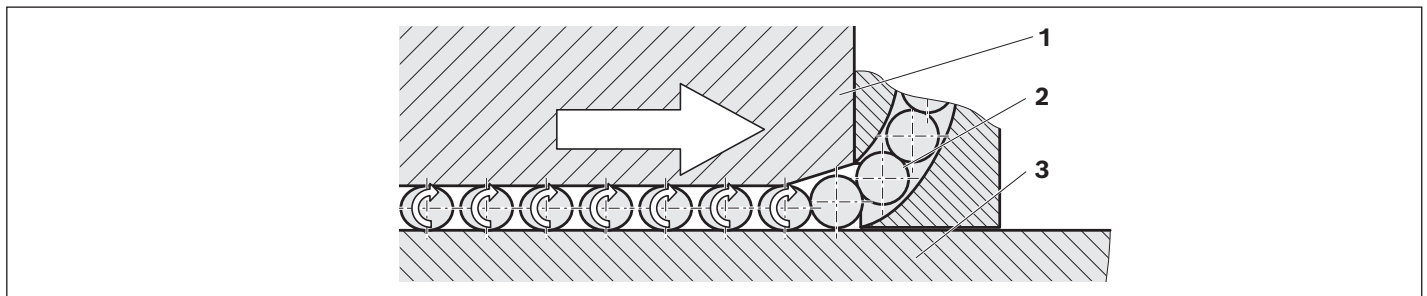**Entry-zone geometry for conventional ball runner blocks**

1) Ball runner blocks    2) Ball    3) Ball guide rail

**Ball entry**

- ▶ The balls are guided up to the start of the entry zone via the roller deflection.
- ▶ If the distance between the ball runner block (1) and the ball guide rail (3) is smaller than the ball diameter, the ball (2) is put under load (preload) in pulses.
- ▶ The preload is increased in the entry zone and reaches its maximum in the load bearing zone. By doing so, the ball transmits its force from the ball runner block to the ball guide rail.
- ▶ Due to the kinematic and geometric relations, a distance between the individual balls is set.

**Entry zone**

The conventional ball runner blocks comprise of a fix entry zone. The depth of the entry zone shall be suitable for a high load, since a fault-free ball entry is to be guaranteed under very high loads, as well.

- ▶ On the one hand, as many load-bearing balls as possible should be in the ball runner block in order to reach an ideal load-bearing capacity.  
⇒ Entry zone as short as possible
- ▶ On the other hand, the load during the entry of the balls should be increased as slowly as possible and thus in a harmonic manner in order to reach the maximum of the geometric travel accuracy.  
⇒ Entry zone which is as flat (long) as possible


There is a conflict of aims between short and long entry zones.

## Product description

### High-precision ball runner block BSHP

#### New entry-zone geometry for ball runner block in high-precision version

The ball runner blocks in high-precision version comprise of an innovative entry zone. The steel bearing plates are not supported by the ball runner block in the end area and can therefore deform elastically. The entry zone adjusts itself individually to the current operating load of the ball runner block. I.e. the balls run smoothly into the bearing zone without loading pulsations.

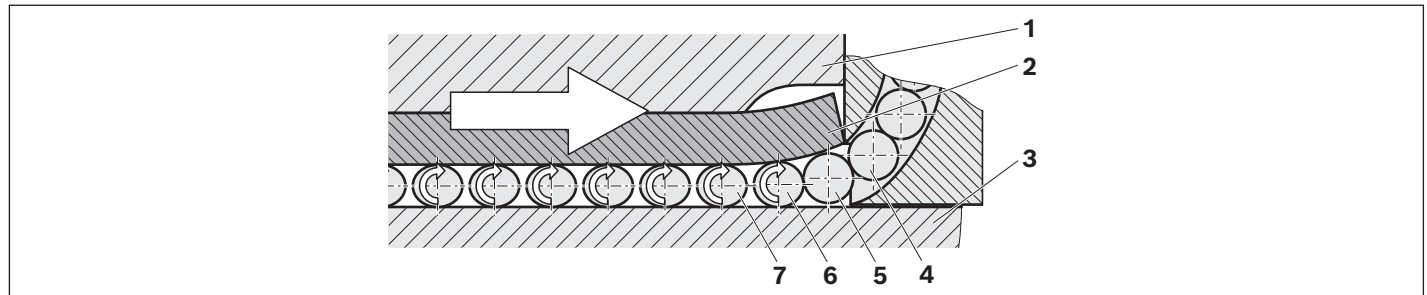

- |                        |                    |
|------------------------|--------------------|
| 1) Ball runner blocks  | 3) Ball guide rail |
| 2) Steel bearing plate | 4) – 7) Balls      |

#### Ball entry

- ▶ The balls (4) are guided up to the start of the entry zone via the roller deflection.
- ▶ The ball (5) can enter without load.
- ▶ The ball (6) elastically deforms the end of the steel bearing plate (2). This deformation results from the total yielding of the ball deformation and the deformation of the free ends of the steel bearing plates.
- ▶ If the distance between the steel bearing plate and the ball guide rail (3) is smaller than the ball diameter, the ball is put under load (preload) slowly and evenly.
- ▶ The preload is increased harmonically until the ball (7) has reached its maximum preload.

### Innovative solutions by Rexroth:

#### The load-dependent entry zone

The functionality of the entry zone is decisive. The steel bearing plates are manufactured with such precision that they deflect by the ideal amount according to the load. Thus, the balls can enter particularly smoothly. Due to the precise manufacture of the steel bearing plates, they are only deformed by an entering ball to such an extent that the following ball can run in without load. The balls thus no longer enter the load-bearing zone through a fixed entry zone, rather transition smoothly on a tangential, ideally angled elastic line into the load-bearing zone. The smooth entry of the balls and the continuous adaptation of the entry zone to the load represent the most decisive benefits of the High-precision Ball Runner Blocks.

#### Characteristic features

- |   |                                     |
|---|-------------------------------------|
| 1 | Maximum travel accuracy             |
| 2 | Reduced friction force oscillations |
| 3 | The conflict of aims is resolved    |

## Fluctuation of friction forces

### Definition

The overall driving force of a ball runner block consist of the following components:


- 1 Ball friction
- 2 Sealing friction
- 3 Friction in the ball deflections and ball returns

In operation, the fluctuations of the friction force can be particularly disturbing.

### These fluctuations are essentially impacted by the following effect:

The balls need to be brought into the loaded load-bearing zone from the load-free zone. The harmonic entry zone and the innovative ball feed are used to reduce the fluctuations to a minimum, which means that the linear drive will also be easier to control.

### Friction force comparison of ball runner block size 35 with an external load of 10,000 N

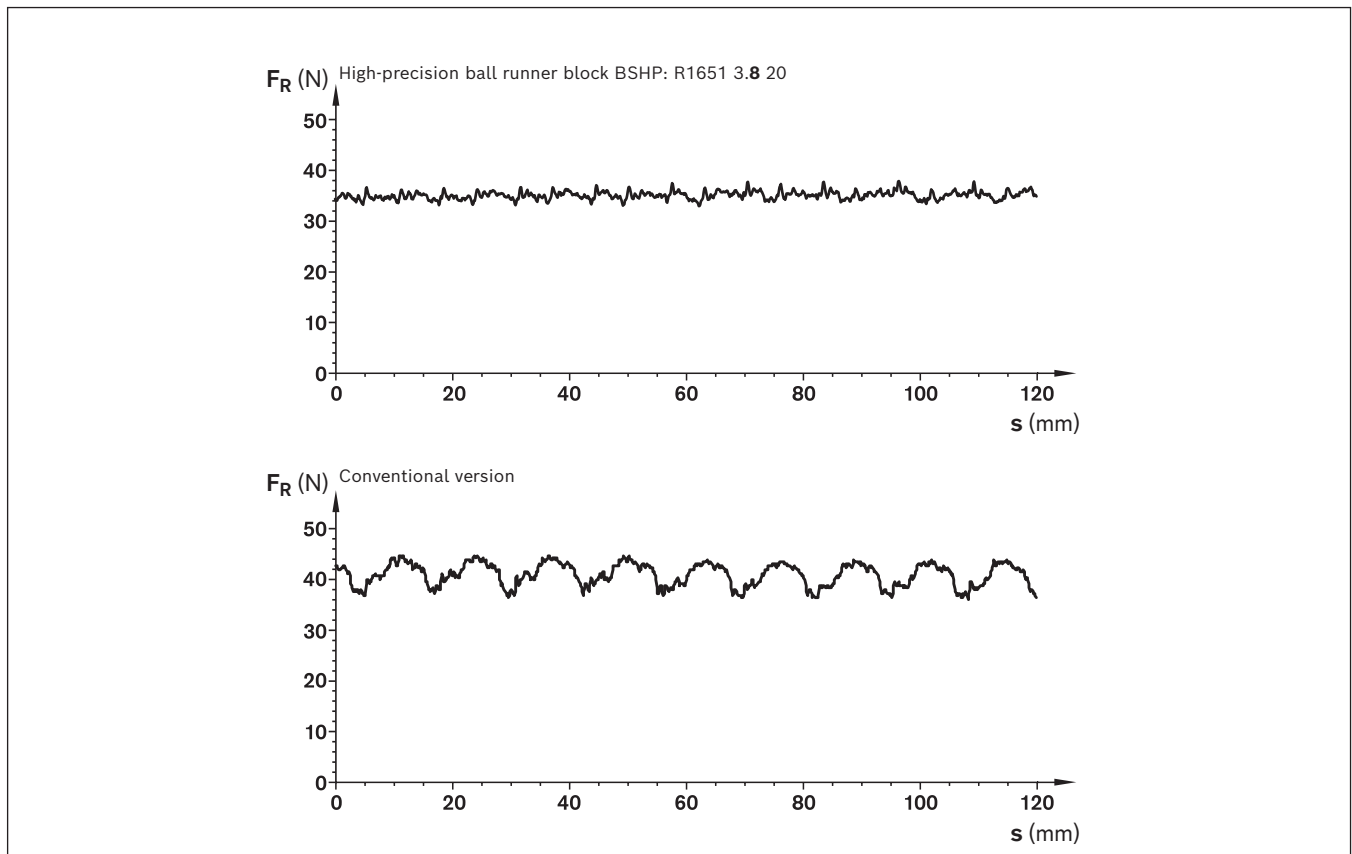

⇒ Reduced friction force value

⇒ Significantly reduced fluctuation of friction forces



# Product description


## Travel accuracy

### Definition

In an ideal case, a ball runner block moves translatively in relation to the x-axis over the ball guide rail. In practice, however, deviations occur in all six degrees of freedom. The term travel accuracy describes the deviation from this ideal line.

#### Six different degrees of freedom

- 1 Vertical offset (linear deviation in Z)
- 2 Yaw (rotary motion around Z)
- 3 Side deviation (linear deviation in Y)
- 4 Pitching (rotary motion around Y)
- 5 Translation (linear movement in X)
- 6 Rollers (rotary motion around x)

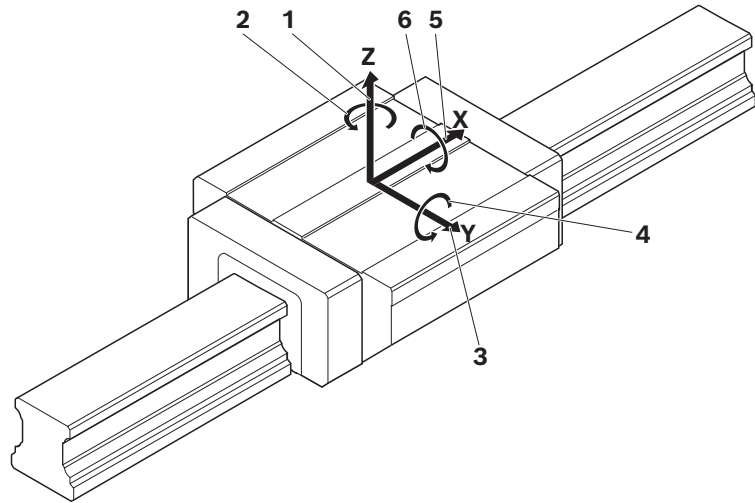

### Causes of travel inaccuracy

The travel accuracy is impacted by the following points:

1. Inaccurate mounting base on which the ball guide rail is mounted.
2. Parallelism error between the contact areas of the ball guide rail and the running tracks.
3. Elastic deformations of the ball guide rail by the fastening screws.
4. Accuracy fluctuations caused by the balls entering and exiting.

### Potential for optimization

With respect to 1: Contact surfaces of the ball guide rail should be produced as precisely as possible (outside of the scope of influence of Rexroth).

With respect to 2: Any deviation should be equalized by the selection of the accuracy class of the ball guide rail.

With respect to 3: Reduce the tightening torque. The tightening torque of the fastening screws has a proportional impact. A reduction of the tightening torque decreases the compressive strain of the rail material.

⇒ Lower geometric process fluctuations

With respect to 4: The patented, innovative entry zone of Rexroth - High-precision Ball Runner Blocks reduces the speed fluctuations to a minimum.

**⚠** With this measure, the transferable forces and moments can be reduced.

Further potential for improvement:

- Use of long ball runner blocks
- Installation of additional ball runner blocks per ball guide rail.




**The measured deviations have the following cause**

A ball circulation contains a number  $n$  of supporting balls which are under load. If the ball runner block is moved into the direction of travel, via the entry zone, a new ball enters the load-bearing zone and  $n + 1$  balls are supporting. This disturbs the internal balance of the four supporting rows of balls. The ball runner block enters a rotational movement since the balls can arbitrarily enter the supporting rows of balls. In order to restore the balance, the ball runner block is moving into a new balance position. If the ball runner block is moved further, a supporting ball exits the load-bearing zone at the ball exit. Thus, the internal balance of the four supporting rows of balls is disturbed again and the ball runner block enters a rotational movement. This effect can be clearly seen in the diagram on the next page.

As it has been verified in practical applications, the period of short-wave inaccuracies roughly corresponds to twice the ball diameter.


The remaining long-wave deviation is caused by the described causes 1, 2 and 3 (inaccurate mounting base, parallelism errors and elastic deformation of the ball guide rail due to the fastening screws).

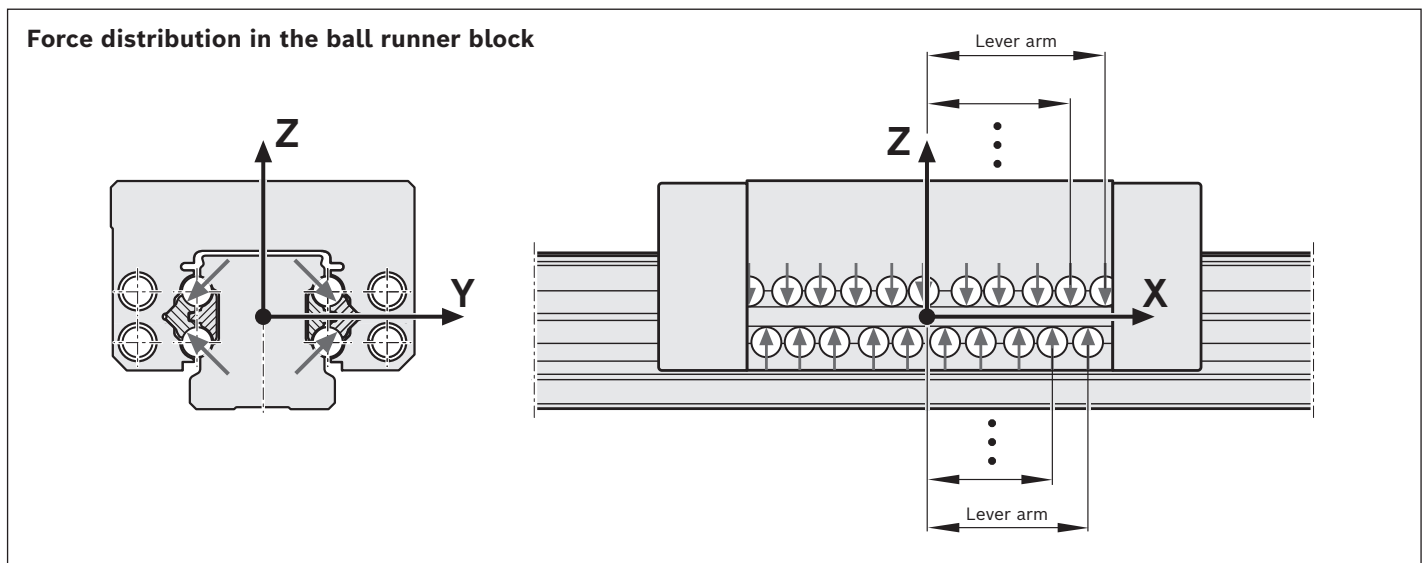

## Product description

### Direct comparison of the travel accuracy of two ball runner blocks


It can be clearly seen that the short-wave inaccuracy (dashed) can be significantly reduced by the new innovative design of the entry zone (continuous line).

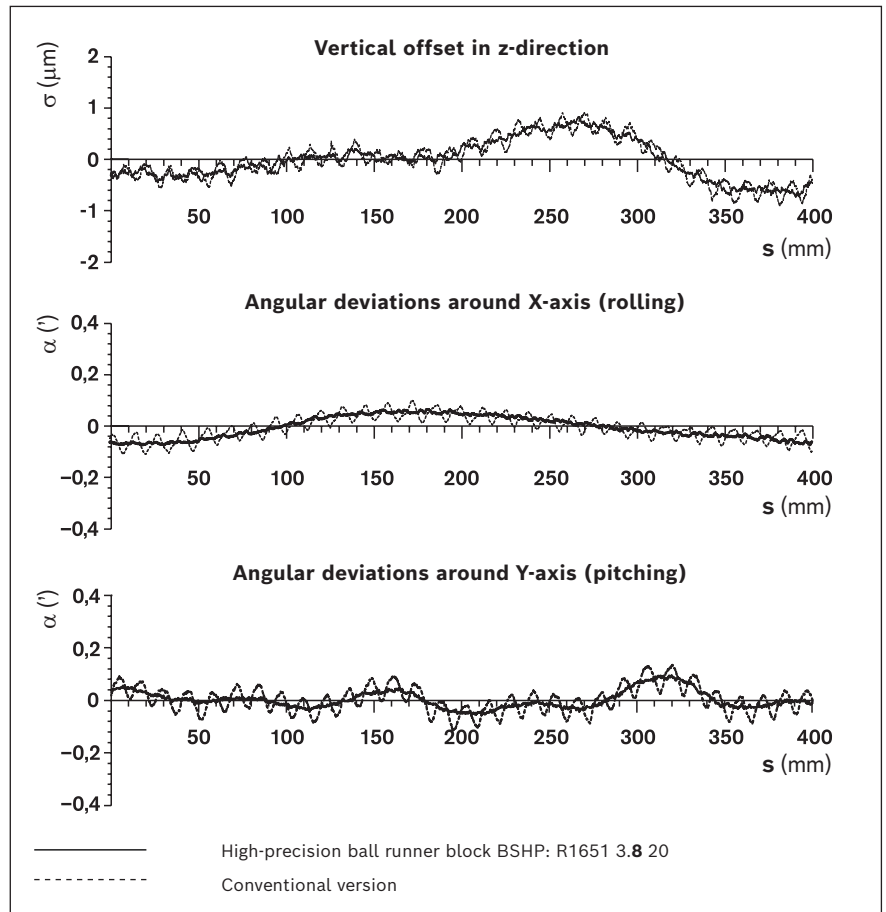

## Application examples


Rexroth high-precision ball runner blocks are particularly suited for the following applications:

### Measuring

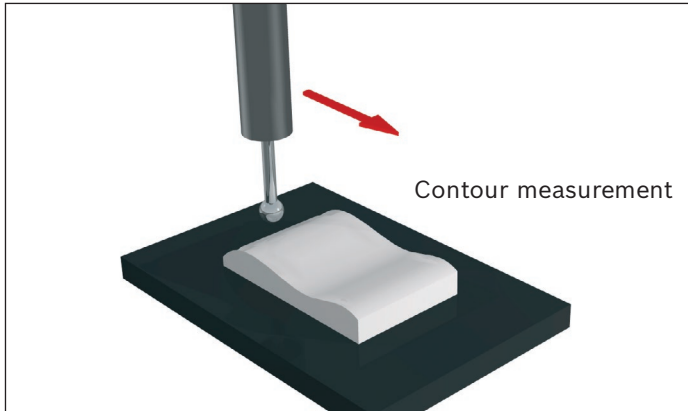


3D coordinate measuring machine

### Milling

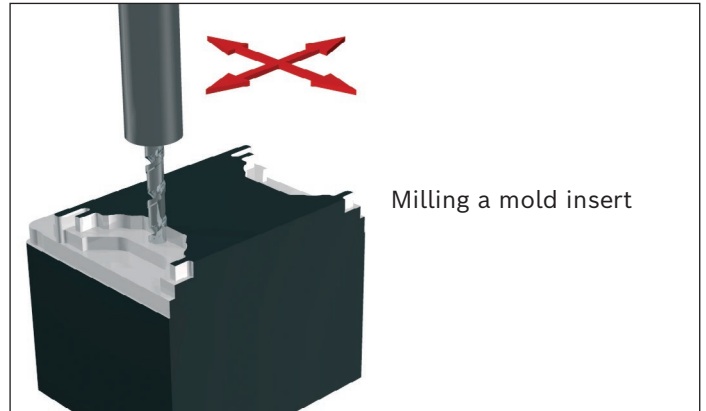


Hard milling

### Grinding

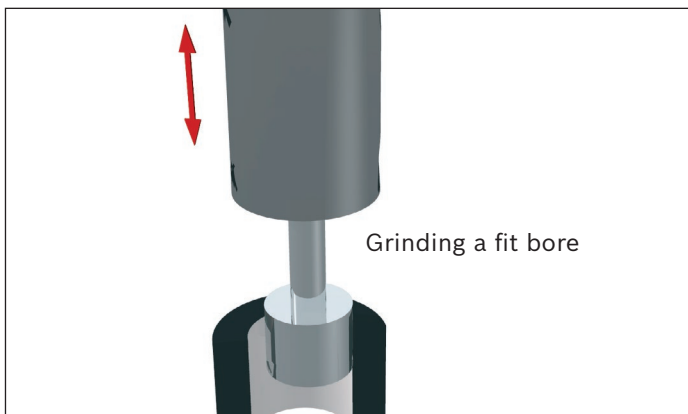


Internal cylindrical grinding

### Turning

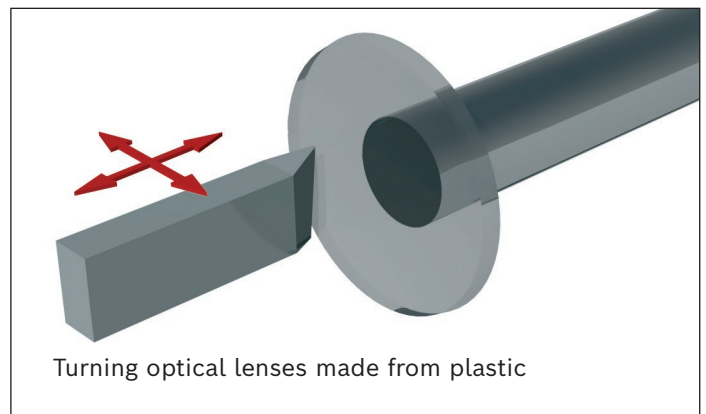


High-precision turning

### Electrical discharge machining

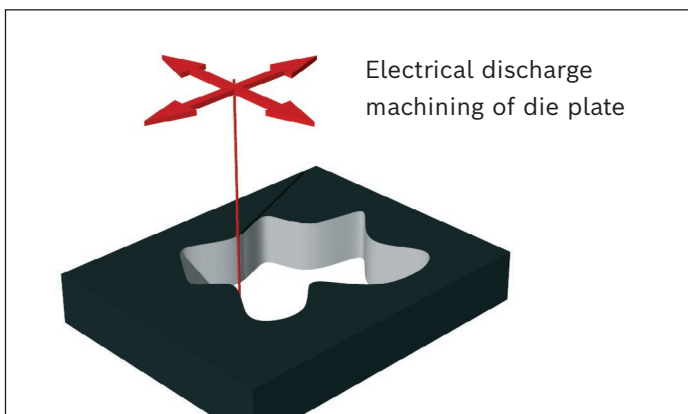

Wire electrical discharge machining

### Microelectronics

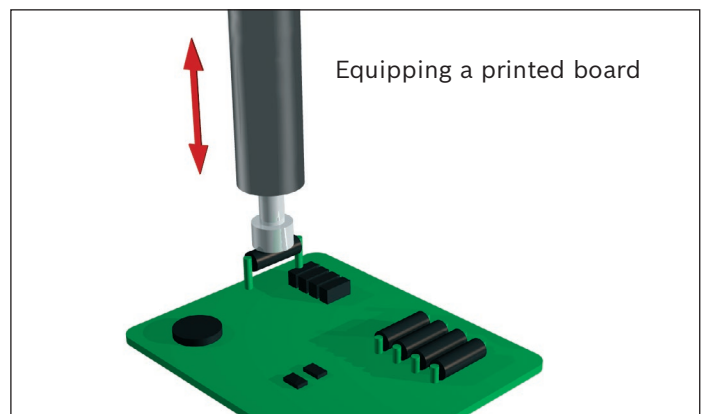


Printed board mounting machine


These are only a few examples. Naturally, other applications can be realized. Feel free to ask any questions that you may have. We have an appropriate solution.

## Overview of formats


### Standard ball runner blocks<sup>1)</sup> BSHP up to size 45

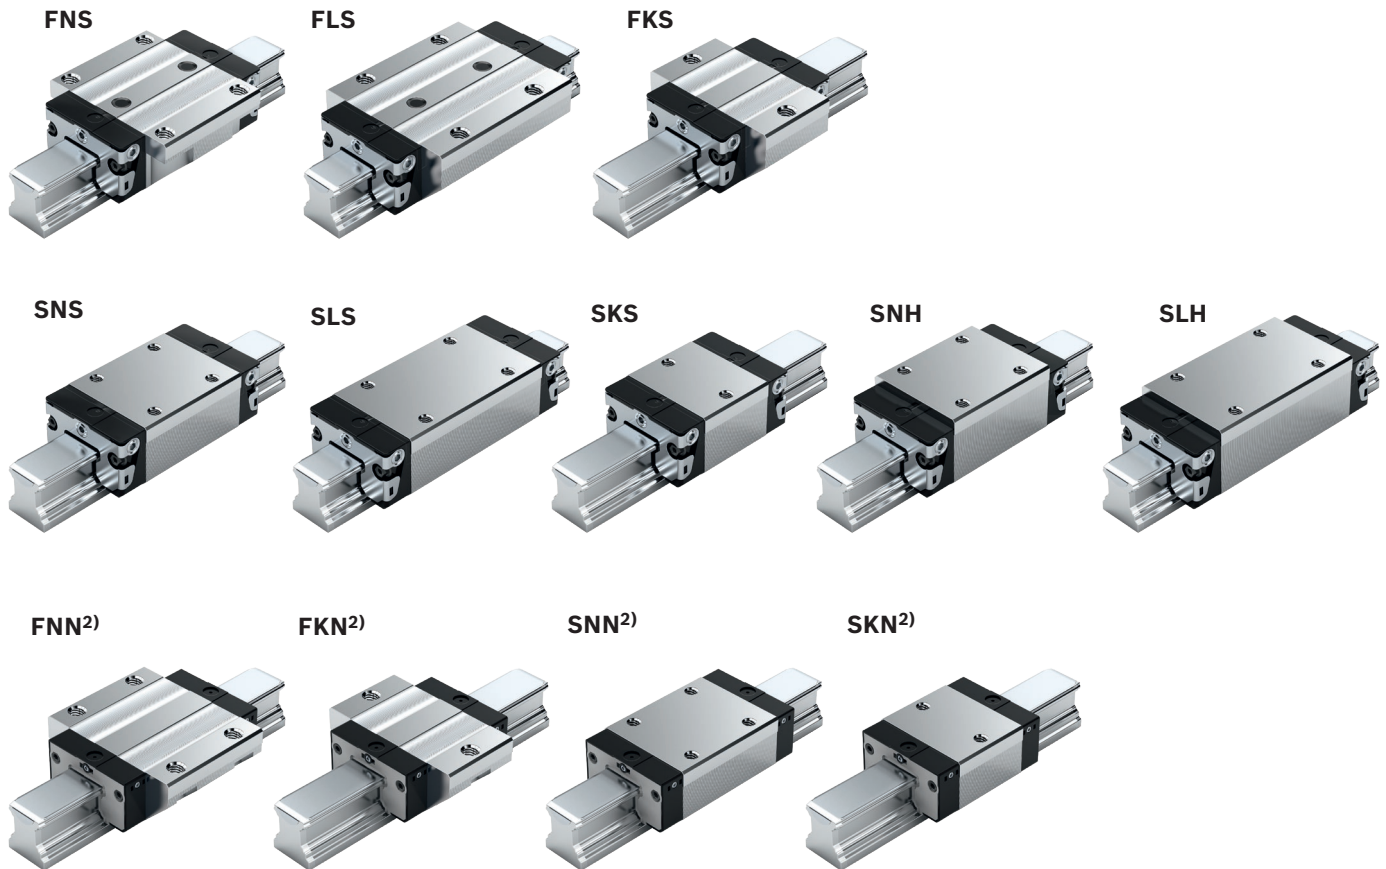

### Heavy-duty ball runner blocks<sup>2)</sup> BSHP from size 55

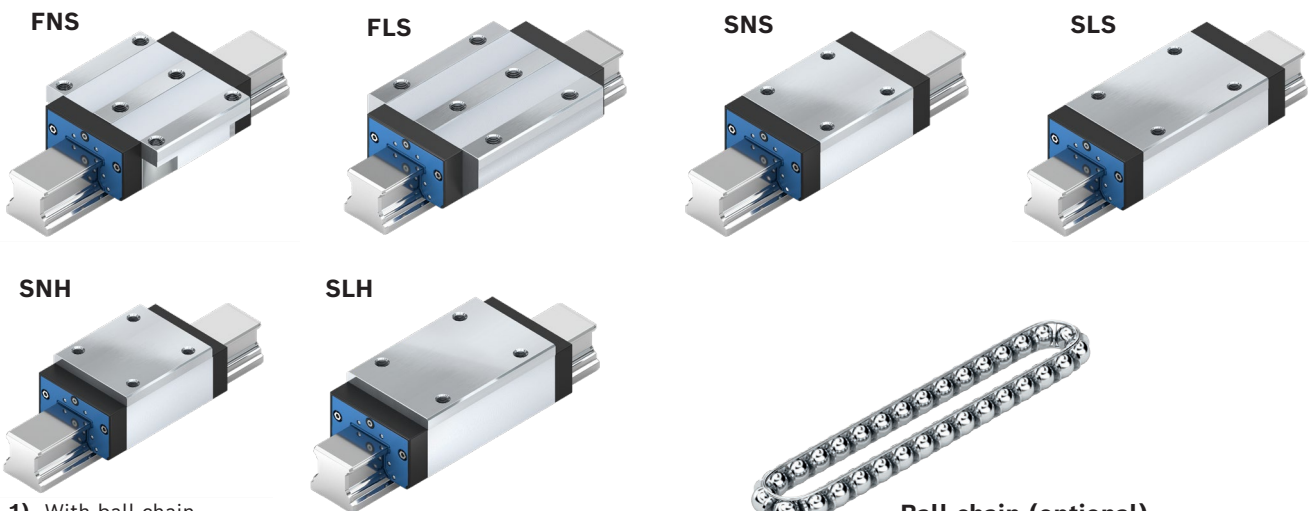

- 1) With ball chain
- 2) Without ball chain



**Ball chain (optional)**  
► Optimized noise level


## Ordering example

**Ordering ball runner blocks** The material number is composed of the code numbers for the individual options. Each option (highlighted in gray) is coded in a material number digit (on a white background). The following ordering example applies to all ball runner blocks.

### Explanation of option "Ball runner blocks with size"

The format of the ball runner blocks – in this example, a standard ball runner block FNS – is specified on the respective product page.

Coding in the material number: R1651 7



### Ordering example

Options:

- Ball runner block FNS
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number: **R1651 713 20**

Options and material numbers

| Size  | Ball runner blocks with size | Preload class |    |    |    | Accuracy class |   |   |    |    |    | Seals on ball runner blocks |    |    |                 |    |    |
|-------|------------------------------|---------------|----|----|----|----------------|---|---|----|----|----|-----------------------------|----|----|-----------------|----|----|
|       |                              | C0            | C1 | C2 | C3 | N              | H | P | XP | SP | UP | without ball chain          |    |    | with ball chain |    |    |
| 15    | R1651 1                      | 9             |    |    |    | 4              | 3 | – | –  | –  | –  | 20                          | 21 | –  | 22              | 23 | –  |
|       |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | –  | 22              | 23 | –  |
|       |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | –  | 22              | 23 | –  |
|       |                              |               |    |    | 3  | –              | – | – | 8  | 1  | 9  | 20                          | 21 | –  | 22              | 23 | –  |
| 20    | R1651 8                      | 9             |    |    |    | 4              | 3 | – | –  | –  | –  | 20                          | 21 | –  | 22              | 23 | –  |
|       |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 22 | 22              | 23 | 2Y |
|       |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 22 | 22              | 23 | 2Y |
|       |                              |               |    |    | 3  | –              | – | – | 8  | 1  | 9  | 20                          | 21 | 22 | 22              | 23 | 2Y |
| 25    | R1651 2                      | 9             |    |    |    | 4              | 3 | – | –  | –  | –  | 20                          | 21 | –  | 22              | 23 | –  |
|       |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 22 | 22              | 23 | 2Y |
|       |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 22 | 22              | 23 | 2Y |
|       |                              |               |    |    | 3  | –              | – | – | 8  | 1  | 9  | 20                          | 21 | 22 | 22              | 23 | 2Y |
| 30    | R1651 7                      | 9             |    |    |    | 4              | 3 | – | –  | –  | –  | 20                          | 21 | –  | 22              | 23 | –  |
|       |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 22 | 22              | 23 | 2Y |
|       |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 22 | 22              | 23 | 2Y |
|       |                              |               |    |    | 3  | –              | – | – | 8  | 1  | 9  | 20                          | 21 | 22 | 22              | 23 | 2Y |
| 35    | R1651 3                      | 9             |    |    |    | 4              | 3 | – | –  | –  | –  | 20                          | 21 | –  | 22              | 23 | –  |
|       |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 22 | 22              | 23 | 2Y |
|       |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 22 | 22              | 23 | 2Y |
|       |                              |               |    |    | 3  | –              | – | – | 8  | 1  | 9  | 20                          | 21 | 22 | 22              | 23 | 2Y |
| 45    | R1651 4                      | 9             |    |    |    | 4              | 3 | – | –  | –  | –  | 20                          | –  | –  | 22              | –  | –  |
|       |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 1  | 9  | 20                          | –  | 22 | 22              | –  | 2Y |
|       |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 1  | 9  | 20                          | –  | 22 | 22              | –  | 2Y |
|       |                              |               |    |    | 3  | –              | – | – | 8  | 1  | 9  | 20                          | –  | 22 | 22              | –  | 2Y |
| E.g.: | R1651 7                      |               | 1  |    |    |                | 3 |   |    |    |    | 20                          |    |    |                 |    |    |

### Preload classes

C0 = Without preload (clearance)  
C1 = Moderate preload  
C2 = Average preload  
C3 = High preload

### Seals

SS = Standard seal  
LS = Low-friction seal  
DS = Double-lip seal


### Key

Gray numbers  
= No preferred variants/combinations (partially longer delivery times)

### Definition of the format of ball runner blocks

| Criterion     | Designation                  | Code (example)         |
|---------------|------------------------------|------------------------|
|               |                              | <b>F      N      S</b> |
| <b>Width</b>  | Flange ( <b>F</b> )          | F                      |
|               | Slimline ( <b>S</b> )        | S                      |
|               | Wide ( <b>B</b> )            | B                      |
|               | Compact ( <b>C</b> )         | C                      |
| <b>Length</b> | Normal ( <b>N</b> )          | N                      |
|               | Long ( <b>L</b> )            | L                      |
|               | Short ( <b>K</b> )           | K                      |
| <b>Height</b> | Standard height ( <b>S</b> ) | S                      |
|               | High ( <b>H</b> )            | H                      |
|               | Low ( <b>N</b> )             | N                      |

## FNS – Flange, normal, standard height

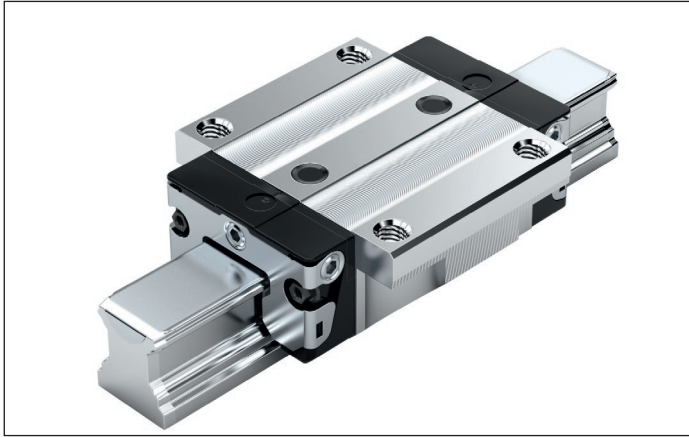**R1651 ... 2.****Dynamic characteristics**

Travel speed:  $v_{\max} = 5 \text{ m/s}$   
 Acceleration:  $a_{\max} = 500 \text{ m/s}^2$   
 (If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

**Note on lubrication**

► Pre-lubricated

**Note**

Can be used on all SNS/SNO ball guide rails. Ball runner blocks of size 55 and size 65 can be found in chapter "Heavy-duty ball runner block BSHP made of steel" after this chapter.

**Options and material numbers**

| Size         | Ball runner blocks with size | Preload class |    |    |    | Accuracy class |   |   |    |    |    | Seals on ball runner blocks |    |    |                 |    |    |
|--------------|------------------------------|---------------|----|----|----|----------------|---|---|----|----|----|-----------------------------|----|----|-----------------|----|----|
|              |                              | C0            | C1 | C2 | C3 | N              | H | P | XP | SP | UP | without ball chain          |    |    | with ball chain |    |    |
| <b>15</b>    | R1651 1                      | 9             |    |    |    | 4              | 3 | – | –  | –  | –  | 20                          | 21 | –  | 22              | 23 | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
| <b>20</b>    | R1651 8                      | 9             |    |    |    | 4              | 3 | – | –  | –  | –  | 20                          | 21 | –  | 22              | 23 | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
| <b>25</b>    | R1651 2                      | 9             |    |    |    | 4              | 3 | – | –  | –  | –  | 20                          | 21 | –  | 22              | 23 | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
| <b>30</b>    | R1651 7                      | 9             |    |    |    | 4              | 3 | – | –  | –  | –  | 20                          | 21 | –  | 22              | 23 | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
| <b>35</b>    | R1651 3                      | 9             |    |    |    | 4              | 3 | – | –  | –  | –  | 20                          | 21 | –  | 22              | 23 | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
| <b>45</b>    | R1651 4                      | 9             |    |    |    | 4              | 3 | – | –  | –  | –  | 20                          | –  | –  | 22              | –  | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 1  | 9  | 20                          | –  | 2Z | 22              | –  | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 1  | 9  | 20                          | –  | 2Z | 22              | –  | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 1  | 9  | 20                          | –  | 2Z | 22              | –  | 2Y |
| <b>E.g.:</b> | R1651 7                      |               | 1  |    |    |                | 3 |   |    |    |    |                             | 20 |    |                 |    |    |

1) Only for accuracy classes N and H and for XP in preload class C1.

**Ordering example**

Options:

- Ball runner block FNS
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1651 713 20

**Preload classes**

C0 = Without preload (clearance)  
 C1 = Moderate preload  
 C2 = Average preload  
 C3 = High preload


**Seals**

SS = Standard seal  
 LS = Low-friction seal  
 DS = Double-lip seal

**Key**

Gray numbers

= No preferred variants/combinations (partially longer delivery times)

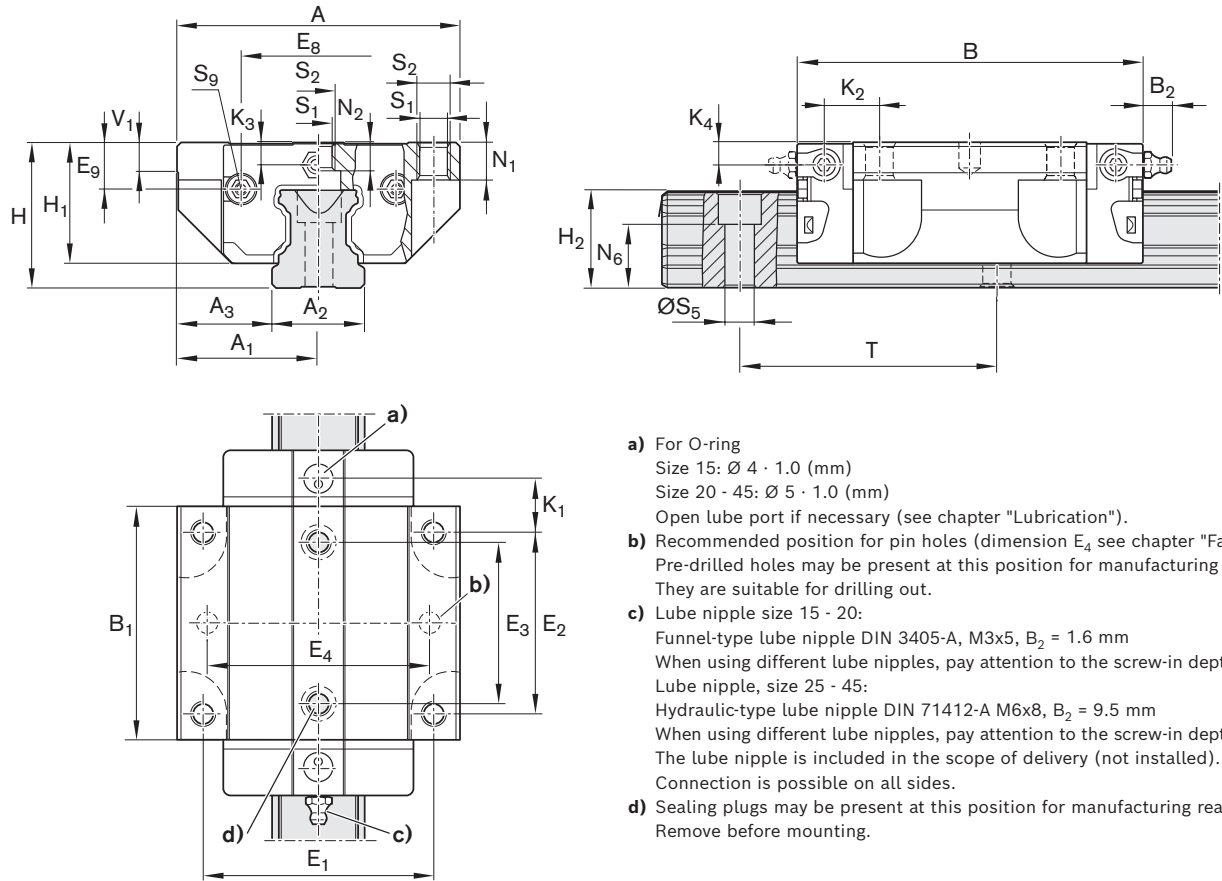

| Size | Dimensions (mm) |                |                |                |                   |                |                |                |                |                |                |    |                |                              |                              |                |                |                |                |
|------|-----------------|----------------|----------------|----------------|-------------------|----------------|----------------|----------------|----------------|----------------|----------------|----|----------------|------------------------------|------------------------------|----------------|----------------|----------------|----------------|
|      | A               | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | B <sup>+0.5</sup> | B <sub>1</sub> | E <sub>1</sub> | E <sub>2</sub> | E <sub>3</sub> | E <sub>8</sub> | E <sub>9</sub> | H  | H <sub>1</sub> | H <sub>2</sub> <sup>1)</sup> | H <sub>2</sub> <sup>2)</sup> | K <sub>1</sub> | K <sub>2</sub> | K <sub>3</sub> | K <sub>4</sub> |
| 15   | 47              | 23.5           | 15             | 16.0           | 58.2              | 39.2           | 38             | 30             | 26             | 24.55          | 6.70           | 24 | 19.90          | 16.30                        | 16.20                        | 8.00           | 9.6            | 3.20           | 3.20           |
| 20   | 63              | 31.5           | 20             | 21.5           | 75.0              | 49.6           | 53             | 40             | 35             | 32.50          | 7.30           | 30 | 25.35          | 20.75                        | 20.55                        | 11.80          | 11.8           | 3.35           | 3.35           |
| 25   | 70              | 35.0           | 23             | 23.5           | 86.2              | 57.8           | 57             | 45             | 40             | 38.30          | 11.50          | 36 | 29.90          | 24.45                        | 24.25                        | 12.45          | 13.6           | 5.50           | 5.50           |
| 30   | 90              | 45.0           | 28             | 31.0           | 97.7              | 67.4           | 72             | 52             | 44             | 48.40          | 14.60          | 42 | 35.35          | 28.55                        | 28.35                        | 14.00          | 15.7           | 6.05           | 6.05           |
| 35   | 100             | 50.0           | 34             | 33.0           | 110.5             | 77.0           | 82             | 62             | 52             | 58.00          | 17.35          | 48 | 40.40          | 32.15                        | 31.85                        | 14.50          | 16.0           | 6.90           | 6.90           |
| 45   | 120             | 60.0           | 45             | 37.5           | 137.6             | 97.0           | 100            | 80             | 60             | 69.80          | 20.90          | 60 | 50.30          | 40.15                        | 39.85                        | 17.30          | 19.3           | 8.20           | 8.20           |

| Size | Dimensions (mm) |                |                                |                |                |                |                |     |                |      | Mass<br>(kg) | Load capacities <sup>3)</sup><br>(N) |                | Load moments <sup>3)</sup> (Nm) |                 |                |                 |
|------|-----------------|----------------|--------------------------------|----------------|----------------|----------------|----------------|-----|----------------|------|--------------|--------------------------------------|----------------|---------------------------------|-----------------|----------------|-----------------|
|      | N <sub>1</sub>  | N <sub>2</sub> | N <sub>6</sub> <sup>±0.5</sup> | S <sub>1</sub> | S <sub>2</sub> | S <sub>5</sub> | S <sub>9</sub> | T   | V <sub>1</sub> | m    |              | C                                    | C <sub>0</sub> | M <sub>t</sub>                  | M <sub>t0</sub> | M <sub>L</sub> | M <sub>L0</sub> |
| 15   | 5.2             | 4.40           | 10.3                           | 4.3            | M5             | 4.5            | M2.5x3.5       | 60  | 5.0            | 0.20 | 9 860        | 12 700                               | 95             | 120                             | 68              | 87             |                 |
| 20   | 7.7             | 5.20           | 13.2                           | 5.3            | M6             | 6.0            | M3x5           | 60  | 6.0            | 0.45 | 23 400       | 29 800                               | 300            | 380                             | 200             | 260            |                 |
| 25   | 9.3             | 7.00           | 15.2                           | 6.7            | M8             | 7.0            | M3x5           | 60  | 7.5            | 0.65 | 28 600       | 35 900                               | 410            | 510                             | 290             | 360            |                 |
| 30   | 11.0            | 7.90           | 17.0                           | 8.5            | M10            | 9.0            | M3x5           | 80  | 7.0            | 1.10 | 36 500       | 48 100                               | 630            | 830                             | 440             | 580            |                 |
| 35   | 12.0            | 10.15          | 20.5                           | 8.5            | M10            | 9.0            | M3x5           | 80  | 8.0            | 1.60 | 51 800       | 80 900                               | 1 110          | 1 740                           | 720             | 1 130          |                 |
| 45   | 15.0            | 12.40          | 23.5                           | 10.4           | M12            | 14.0           | M4x7           | 105 | 10.0           | 3.00 | 86 400       | 132 000                              | 2 330          | 3 560                           | 1 540           | 2 350          |                 |


1) Dimension H<sub>2</sub> with cover strip

2) Dimension H<sub>2</sub> without cover strip

3) Load capacities and load moments for ball runner block **without** ball chain. Load capacities and load moments for ball runner block **with** ball chain 12 Determination of the dynamic load capacities and load moments is based on a travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** by 1.26 according to the table.



# FLS – Flange, long, standard height

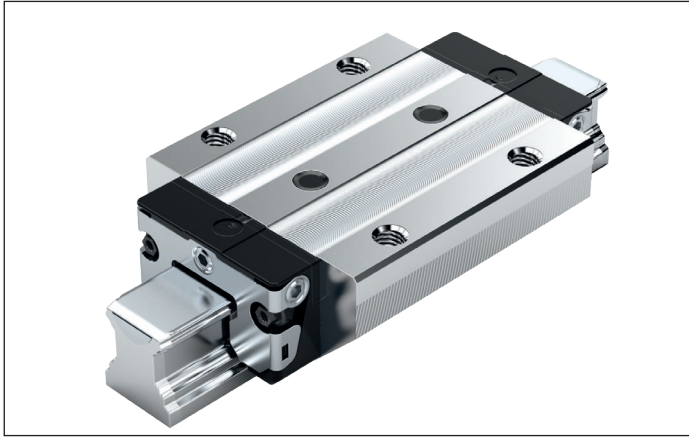

## R1653 ... 2.

### Dynamic characteristics

Travel speed:  $v_{\max} = 5 \text{ m/s}$   
 Acceleration:  $a_{\max} = 500 \text{ m/s}^2$   
 (If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

### Note on lubrication

► Pre-lubricated

### Note

Can be used on all SNS/SNO ball guide rails. Ball runner blocks of size 55 and size 65 can be found in chapter "Heavy-duty ball runner block BSHP made of steel" after this chapter.

### Options and material numbers

| Size  | Ball runner blocks with size | Preload class |    |    |    | Accuracy class |   |   |    |    |    | Seals on ball runner blocks |    |    |                 |    |    |
|-------|------------------------------|---------------|----|----|----|----------------|---|---|----|----|----|-----------------------------|----|----|-----------------|----|----|
|       |                              | C0            | C1 | C2 | C3 | N              | H | P | XP | SP | UP | without ball chain          |    |    | with ball chain |    |    |
| 15    | R1653 1                      | 9             |    |    |    | 4              | 3 | – | –  | –  | –  | 20                          | 21 | –  | 22              | 23 | –  |
|       |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|       |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|       |                              |               |    |    | 3  | –              | – | – | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
| 20    | R1653 8                      | 9             |    |    |    | 4              | 3 | – | –  | –  | –  | 20                          | 21 | –  | 22              | 23 | –  |
|       |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|       |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|       |                              |               |    |    | 3  | –              | – | – | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
| 25    | R1653 2                      | 9             |    |    |    | 4              | 3 | – | –  | –  | –  | 20                          | 21 | –  | 22              | 23 | –  |
|       |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|       |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|       |                              |               |    |    | 3  | –              | – | – | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
| 30    | R1653 7                      | 9             |    |    |    | 4              | 3 | – | –  | –  | –  | 20                          | 21 | –  | 22              | 23 | –  |
|       |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|       |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|       |                              |               |    |    | 3  | –              | – | – | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
| 35    | R1653 3                      | 9             |    |    |    | 4              | 3 | – | –  | –  | –  | 20                          | 21 | –  | 22              | 23 | –  |
|       |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|       |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|       |                              |               |    |    | 3  | –              | – | – | 8  | 1  | 9  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
| 45    | R1653 4                      | 9             |    |    |    | 4              | 3 | – | –  | –  | –  | 20                          | –  | –  | 22              | –  | –  |
|       |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 1  | 9  | 20                          | –  | 2Z | 22              | –  | 2Y |
|       |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 1  | 9  | 20                          | –  | 2Z | 22              | –  | 2Y |
|       |                              |               |    |    | 3  | –              | – | – | 8  | 1  | 9  | 20                          | –  | 2Z | 22              | –  | 2Y |
| E.g.: | R1653 7                      | 1             |    |    |    | 3              |   |   |    |    |    | 20                          |    |    |                 |    |    |

1) Only for accuracy classes N and H and for XP in preload class C1.

### Ordering example

Options:

- Ball runner block FLS
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1653 713 20

### Preload classes

C0 = Without preload (clearance)  
 C1 = Moderate preload  
 C2 = Average preload  
 C3 = High preload


### Seals

SS = Standard seal  
 LS = Low-friction seal  
 DS = Double-lip seal

### Key

Gray numbers  
 = No preferred variants/combinations (partially longer delivery times)



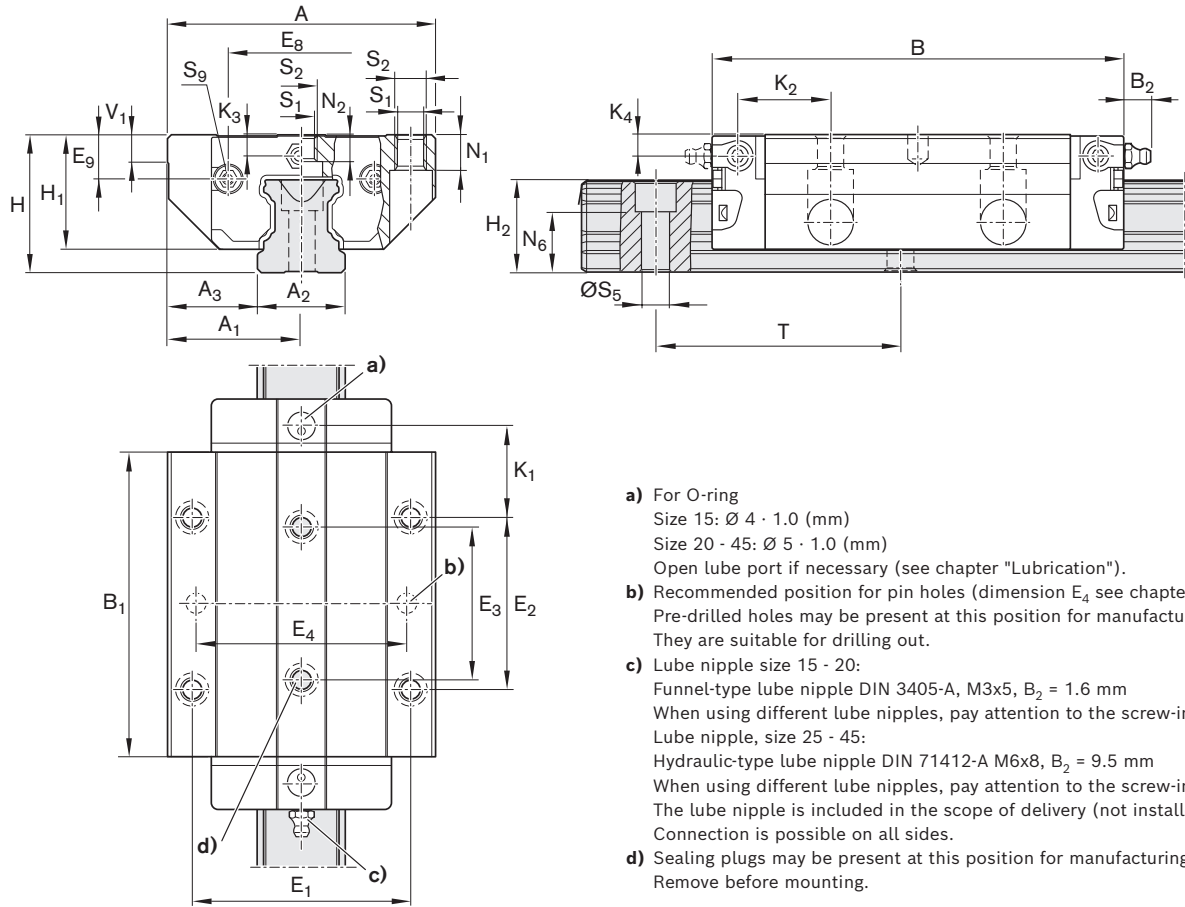

| Size | Dimensions (mm) |                |                |                |                   |                |                |                |                |                |                |    |                |                              |                              |                |                |                |                |  |
|------|-----------------|----------------|----------------|----------------|-------------------|----------------|----------------|----------------|----------------|----------------|----------------|----|----------------|------------------------------|------------------------------|----------------|----------------|----------------|----------------|--|
|      | A               | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | B <sup>+0.5</sup> | B <sub>1</sub> | E <sub>1</sub> | E <sub>2</sub> | E <sub>3</sub> | E <sub>8</sub> | E <sub>9</sub> | H  | H <sub>1</sub> | H <sub>2</sub> <sup>1)</sup> | H <sub>2</sub> <sup>2)</sup> | K <sub>1</sub> | K <sub>2</sub> | K <sub>3</sub> | K <sub>4</sub> |  |
| 15   | 47              | 23.5           | 15             | 16.0           | 72.6              | 53.6           | 38             | 30             | 26             | 24.55          | 6.70           | 24 | 19.90          | 16.30                        | 16.20                        | 15.20          | 16.80          | 3.20           | 3.20           |  |
| 20   | 63              | 31.5           | 20             | 21.5           | 91.0              | 65.6           | 53             | 40             | 35             | 32.50          | 7.30           | 30 | 25.35          | 20.75                        | 20.55                        | 19.80          | 19.80          | 3.35           | 3.35           |  |
| 25   | 70              | 35.0           | 23             | 23.5           | 107.9             | 79.5           | 57             | 45             | 40             | 38.30          | 11.50          | 36 | 29.90          | 24.45                        | 24.25                        | 23.30          | 24.45          | 5.50           | 5.50           |  |
| 30   | 90              | 45.0           | 28             | 31.0           | 119.7             | 89.4           | 72             | 52             | 44             | 48.40          | 14.60          | 42 | 35.35          | 28.55                        | 28.35                        | 25.00          | 26.70          | 6.05           | 6.05           |  |
| 35   | 100             | 50.0           | 34             | 33.0           | 139.0             | 105.5          | 82             | 62             | 52             | 58.00          | 17.35          | 48 | 40.40          | 32.15                        | 31.85                        | 28.75          | 30.25          | 6.90           | 6.90           |  |
| 45   | 120             | 60.0           | 45             | 37.5           | 174.1             | 133.5          | 100            | 80             | 60             | 69.80          | 20.90          | 60 | 50.30          | 40.15                        | 39.85                        | 35.50          | 37.50          | 8.20           | 8.20           |  |


| Size | Dimensions (mm) |                |                                |                |                |                |                |     |                |      | Mass<br>(kg) | Load capacities <sup>3)</sup><br>(N) | Load moments <sup>3)</sup> (Nm) |                 |                |                 |
|------|-----------------|----------------|--------------------------------|----------------|----------------|----------------|----------------|-----|----------------|------|--------------|--------------------------------------|---------------------------------|-----------------|----------------|-----------------|
|      |                 |                |                                |                |                |                |                |     |                |      |              |                                      | M <sub>t</sub>                  |                 | M <sub>L</sub> |                 |
|      | N <sub>1</sub>  | N <sub>2</sub> | N <sub>6</sub> <sup>+0.5</sup> | S <sub>1</sub> | S <sub>2</sub> | S <sub>5</sub> | S <sub>9</sub> | T   | V <sub>1</sub> | m    | C            | C <sub>0</sub>                       | M <sub>t</sub>                  | M <sub>t0</sub> | M <sub>L</sub> | M <sub>L0</sub> |
| 15   | 5.2             | 4.40           | 10.3                           | 4.3            | M5             | 4.5            | M2.5x3.5       | 60  | 5.0            | 0.30 | 12 800       | 18 400                               | 120                             | 180             | 120            | 180             |
| 20   | 7.7             | 5.20           | 13.2                           | 5.3            | M6             | 6.0            | M3x5           | 60  | 6.0            | 0.55 | 29 600       | 41 800                               | 380                             | 540             | 340            | 490             |
| 25   | 9.3             | 7.00           | 15.2                           | 6.7            | M8             | 7.0            | M3x5           | 60  | 7.5            | 0.90 | 37 300       | 52 500                               | 530                             | 750             | 530            | 740             |
| 30   | 11.0            | 7.90           | 17.0                           | 8.5            | M10            | 9.0            | M3x5           | 80  | 7.0            | 1.50 | 46 000       | 66 900                               | 800                             | 1 160           | 740            | 1 080           |
| 35   | 12.0            | 10.15          | 20.5                           | 8.5            | M10            | 9.0            | M3x5           | 80  | 8.0            | 2.25 | 66 700       | 116 000                              | 1 440                           | 2 500           | 1 290          | 2 240           |
| 45   | 15.0            | 12.40          | 23.5                           | 10.4           | M12            | 14.0           | M4x7           | 105 | 10.0           | 4.30 | 111 000      | 190 000                              | 3 010                           | 5 120           | 2 730          | 4 660           |

1) Dimension H<sub>2</sub> with cover strip

2) Dimension H<sub>2</sub> without cover strip

3) Load capacities and load moments for ball runner block **without** ball chain. Load capacities and load moments for ball runner block **with** ball chain 12 Determination of the dynamic load capacities and load moments is based on a travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** by 1.26 according to the table.

## FKS – Flange, short, standard height

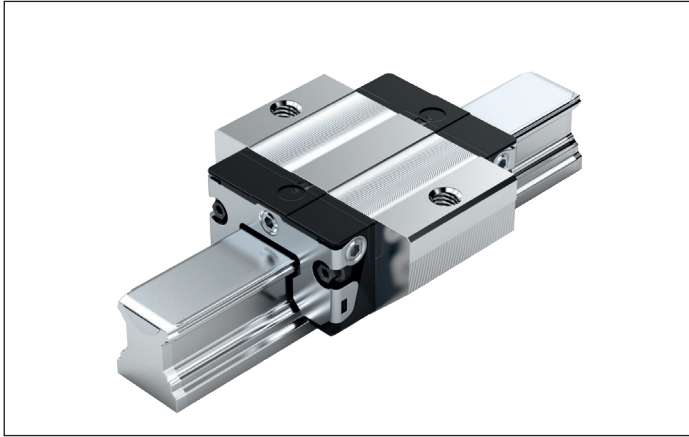

### R1665 ... 2.

#### Dynamic characteristics

Travel speed:  $v_{\max} = 5 \text{ m/s}$   
 Acceleration:  $a_{\max} = 500 \text{ m/s}^2$   
 (If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

► Pre-lubricated

#### Note

Can be used on all SNS/SNO ball guide rails.

### Options and material numbers

| Size  | Ball runner blocks with size | Preload class |    | Accuracy class |   | Seals on ball runner blocks |    |    |                 |    |    |
|-------|------------------------------|---------------|----|----------------|---|-----------------------------|----|----|-----------------|----|----|
|       |                              | C0            | C1 | N              | H | without ball chain          |    |    | with ball chain |    |    |
|       |                              |               |    |                |   | SS                          | LS | DS | SS              | LS | DS |
| 15    | R1665 1                      | 9             |    | 4              | 3 | 20                          | 21 | –  | 22              | 23 | –  |
|       |                              |               | 1  | 4              | 3 | 20                          | 21 | 2Z | 22              | 23 | 2Y |
| 20    | R1665 8                      | 9             |    | 4              | 3 | 20                          | 21 | –  | 22              | 23 | –  |
|       |                              |               | 1  | 4              | 3 | 20                          | 21 | 2Z | 22              | 23 | 2Y |
| 25    | R1665 2                      | 9             |    | 4              | 3 | 20                          | 21 | –  | 22              | 23 | –  |
|       |                              |               | 1  | 4              | 3 | 20                          | 21 | 2Z | 22              | 23 | 2Y |
| 30    | R1665 7                      | 9             |    | 4              | 3 | 20                          | 21 | –  | 22              | 23 | –  |
|       |                              |               | 1  | 4              | 3 | 20                          | 21 | 2Z | 22              | 23 | 2Y |
| 35    | R1665 3                      | 9             |    | 4              | 3 | 20                          | 21 | –  | 22              | 23 | –  |
|       |                              |               | 1  | 4              | 3 | 20                          | 21 | 2Z | 22              | 23 | 2Y |
| E.g.: | R1665 7                      |               | 1  |                | 3 | 20                          |    |    |                 |    |    |

### Ordering example

Options:

- Ball runner block FKS
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1665 713 20

#### Preload classes

C0 = Without preload (clearance)  
 C1 = Moderate preload




#### Seals

SS = Standard seal  
 LS = Low-friction seal  
 DS = Double-lip seal

#### Key

Gray numbers

= No preferred variants/combinations (partially longer delivery times)

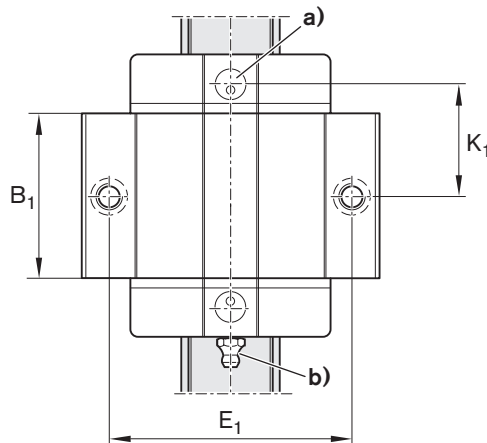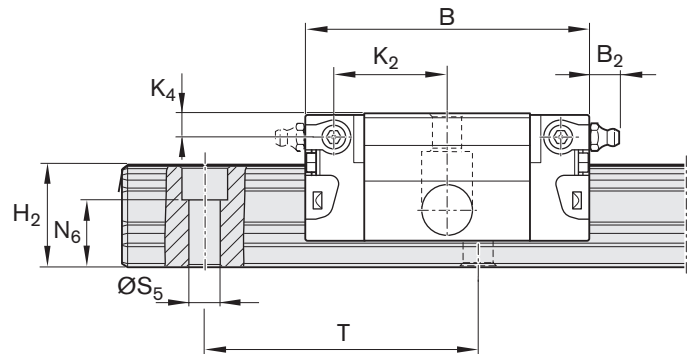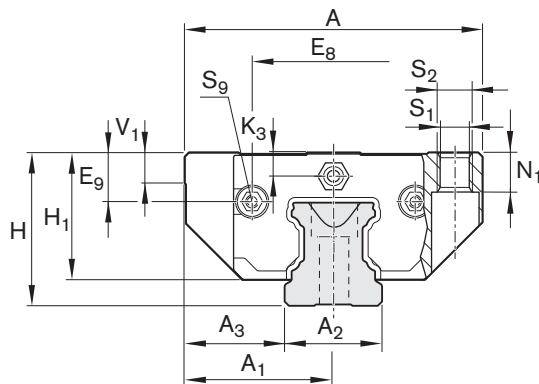

- a) For O-ring  
Size 15: Ø 4 · 1.0 (mm)  
Size 20 - 35: Ø 5 · 1.0 (mm)  
Open lube port if necessary (see chapter "Lubrication").
- b) Lube nipple size 15 - 20:  
Funnel-type lube nipple DIN 3405-A, M3x5, B<sub>2</sub> = 1.6 mm  
When using different lube nipples, pay attention to the screw-in depth of 5 mm!  
Lube nipple, size 25 - 35:  
Hydraulic-type lube nipple DIN 71412-A M6x8, B<sub>2</sub> = 9.5 mm  
When using different lube nipples, pay attention to the screw-in depth of 8 mm!  
The lube nipple is included in the scope of delivery (not installed).  
Connection is possible on all sides.

| Size | Dimensions (mm) |                |                |                |                   |                |                |                |                |    |                |                              |                              |                |                |                |                |
|------|-----------------|----------------|----------------|----------------|-------------------|----------------|----------------|----------------|----------------|----|----------------|------------------------------|------------------------------|----------------|----------------|----------------|----------------|
|      | A               | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | B <sup>+0.5</sup> | B <sub>1</sub> | E <sub>1</sub> | E <sub>8</sub> | E <sub>9</sub> | H  | H <sub>1</sub> | H <sub>2</sub> <sup>1)</sup> | H <sub>2</sub> <sup>2)</sup> | K <sub>1</sub> | K <sub>2</sub> | K <sub>3</sub> | K <sub>4</sub> |
| 15   | 47              | 23.5           | 15             | 16.0           | 44.7              | 25.7           | 38             | 24.55          | 6.70           | 24 | 19.90          | 16.30                        | 16.20                        | 16.25          | 17.85          | 3.20           | 3.20           |
| 20   | 63              | 31.5           | 20             | 21.5           | 57.3              | 31.9           | 53             | 32.50          | 7.30           | 30 | 25.35          | 20.75                        | 20.55                        | 22.95          | 22.95          | 3.35           | 3.35           |
| 25   | 70              | 35.0           | 23             | 23.5           | 67.0              | 38.6           | 57             | 38.30          | 11.50          | 36 | 29.90          | 24.45                        | 24.25                        | 25.35          | 26.50          | 5.50           | 5.50           |
| 30   | 90              | 45.0           | 28             | 31.0           | 75.3              | 45.0           | 72             | 48.40          | 14.60          | 42 | 35.35          | 28.55                        | 28.35                        | 28.80          | 30.50          | 6.05           | 6.05           |
| 35   | 100             | 50.0           | 34             | 33.0           | 84.9              | 51.4           | 82             | 58.00          | 17.35          | 48 | 40.40          | 32.15                        | 31.85                        | 32.70          | 34.20          | 6.90           | 6.90           |


| Size | Dimensions (mm) |                                |                |                |                |                |    |                |      | Mass<br>(kg) | Load capacities <sup>3)</sup><br>(N) |                | Load moments <sup>3)</sup> (Nm) |                 |                |                 |
|------|-----------------|--------------------------------|----------------|----------------|----------------|----------------|----|----------------|------|--------------|--------------------------------------|----------------|---------------------------------|-----------------|----------------|-----------------|
|      | N <sub>1</sub>  | N <sub>6</sub> <sup>±0.5</sup> | S <sub>1</sub> | S <sub>2</sub> | S <sub>5</sub> | S <sub>9</sub> | T  | V <sub>1</sub> | m    |              | C                                    | C <sub>0</sub> | M <sub>t</sub>                  | M <sub>t0</sub> | M <sub>L</sub> | M <sub>L0</sub> |
| 15   | 5.2             | 10.3                           | 4.3            | M5             | 4.5            | M2.5x3.5       | 60 | 5.0            | 0.15 | 6 720        | 7 340                                | 65             | 71                              | 29              | 32             |                 |
| 20   | 7.7             | 13.2                           | 5.3            | M6             | 6.0            | M3x5           | 60 | 6.0            | 0.30 | 15 400       | 16 500                               | 200            | 210                             | 83              | 89             |                 |
| 25   | 9.3             | 15.2                           | 6.7            | M8             | 7.0            | M3x5           | 60 | 7.5            | 0.50 | 19 800       | 21 200                               | 280            | 300                             | 130             | 140            |                 |
| 30   | 11.0            | 17.0                           | 8.5            | M10            | 9.0            | M3x5           | 80 | 7.0            | 0.80 | 25 600       | 28 900                               | 440            | 500                             | 200             | 230            |                 |
| 35   | 12.0            | 20.5                           | 8.5            | M10            | 9.0            | M3x5           | 80 | 8.0            | 1.20 | 36 600       | 49 300                               | 790            | 1 060                           | 340             | 460            |                 |

1) Dimension H<sub>2</sub> with cover strip

2) Dimension H<sub>2</sub> without cover strip

3) Load capacities and load moments for ball runner block **without** ball chain. Load capacities and load moments for ball runner block **with** ball chain 12 Determination of the dynamic load capacities and load moments is based on a travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** by 1.26 according to the table.

## SNS – Slimline, normal, standard height

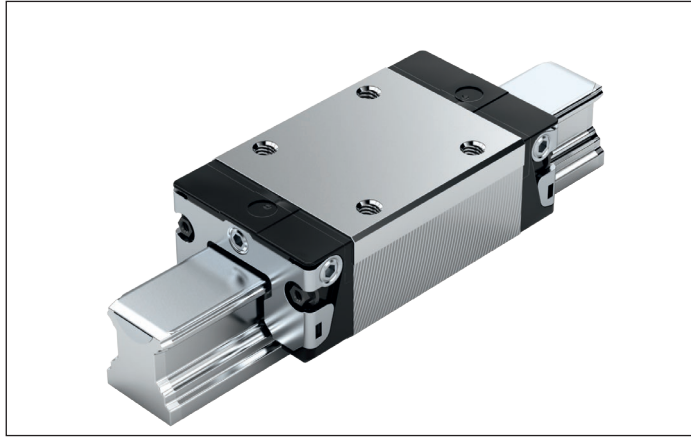**R1622 ... 2.****Dynamic characteristics**Travel speed:  $v_{\max} = 5 \text{ m/s}$ Acceleration:  $a_{\max} = 500 \text{ m/s}^2$ (If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )**Note on lubrication**

► Pre-lubricated

**Note**

Can be used on all SNS/SNO ball guide rails. Ball runner blocks of size 55 and size 65 can be found in chapter "Heavy-duty ball runner block BSHP made of steel" after this chapter.

**Options and material numbers**

| Size         | Ball runner blocks with size | Preload class |    |    |    | Accuracy class |   |   |    | Seals on ball runner blocks |                  |    |                 |                  |    |
|--------------|------------------------------|---------------|----|----|----|----------------|---|---|----|-----------------------------|------------------|----|-----------------|------------------|----|
|              |                              | C0            | C1 | C2 | C3 | N              | H | P | XP | without ball chain          |                  |    | with ball chain |                  |    |
|              |                              |               |    |    |    |                |   |   |    | SS                          | LS <sup>1)</sup> | DS | SS              | LS <sup>1)</sup> | DS |
| <b>15</b>    | R1622 1                      | 9             |    |    |    | 4              | 3 | – | –  | 20                          | 21               | –  | 22              | 23               | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
| <b>20</b>    | R1622 8                      | 9             |    |    |    | 4              | 3 | – | –  | 20                          | 21               | –  | 22              | 23               | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
| <b>25</b>    | R1622 2                      | 9             |    |    |    | 4              | 3 | – | –  | 20                          | 21               | –  | 22              | 23               | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
| <b>30</b>    | R1622 7                      | 9             |    |    |    | 4              | 3 | – | –  | 20                          | 21               | –  | 22              | 23               | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
| <b>35</b>    | R1622 3                      | 9             |    |    |    | 4              | 3 | – | –  | 20                          | 21               | –  | 22              | 23               | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
| <b>45</b>    | R1622 4                      | 9             |    |    |    | 4              | 3 | – | –  | 20                          | –                | –  | 22              | –                | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 20                          | –                | 2Z | 22              | –                | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 20                          | –                | 2Z | 22              | –                | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 20                          | –                | 2Z | 22              | –                | 2Y |
| <b>E.g.:</b> | R1622 7                      | 1             |    |    |    | 3              |   |   |    | 20                          |                  |    |                 |                  |    |

1) Only for accuracy classes N and H and for XP in preload class C1.

**Ordering example**

Options:

- Ball runner block SNS
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1622 713 20

**Preload classes**

C0 = Without preload (clearance)  
 C1 = Moderate preload  
 C2 = Average preload  
 C3 = High preload


**Seals**

SS = Standard seal  
 LS = Low-friction seal  
 DS = Double-lip seal

**Key**

Gray numbers

= No preferred variants/combinations (partially longer delivery times)

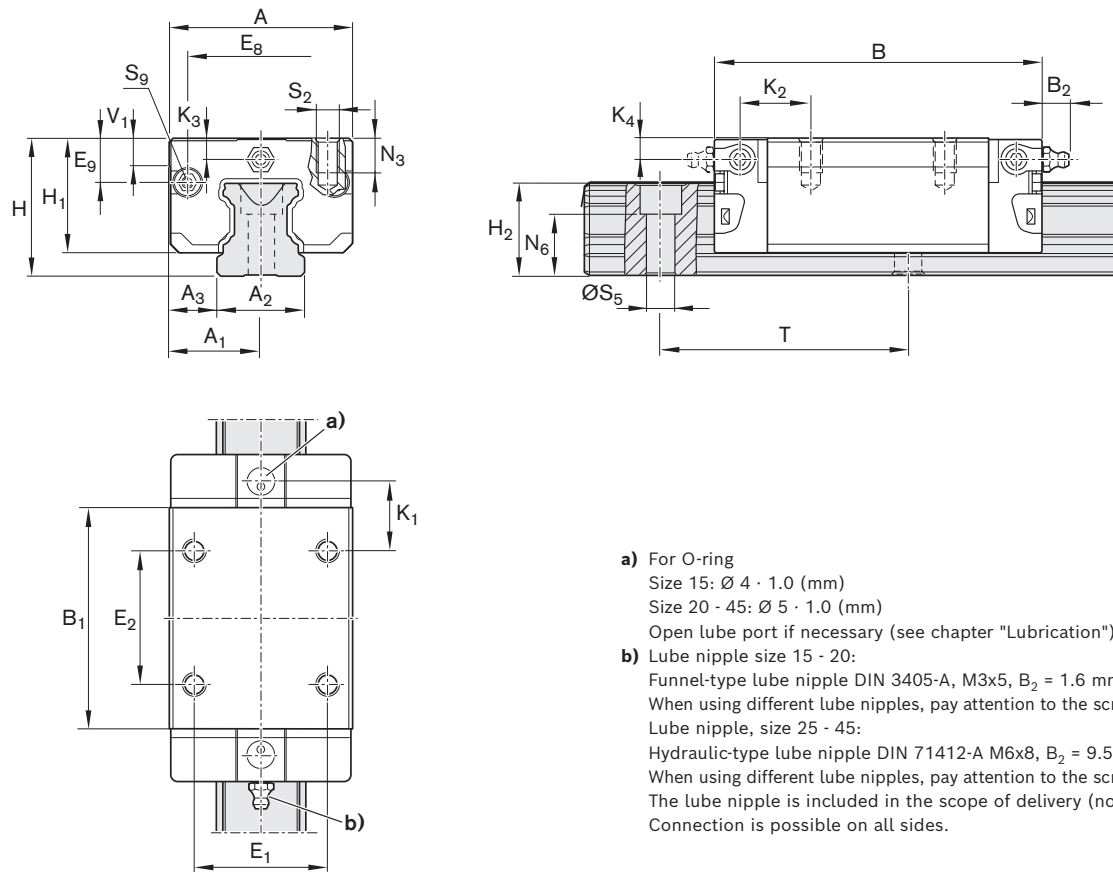

| Size | Dimensions (mm) |                |                |                |                   |                |                |                |                |                |    |                |                              |                              |                |                |                |                |
|------|-----------------|----------------|----------------|----------------|-------------------|----------------|----------------|----------------|----------------|----------------|----|----------------|------------------------------|------------------------------|----------------|----------------|----------------|----------------|
|      | A               | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | B <sup>+0.5</sup> | B <sub>1</sub> | E <sub>1</sub> | E <sub>2</sub> | E <sub>8</sub> | E <sub>9</sub> | H  | H <sub>1</sub> | H <sub>2</sub> <sup>1)</sup> | H <sub>2</sub> <sup>2)</sup> | K <sub>1</sub> | K <sub>2</sub> | K <sub>3</sub> | K <sub>4</sub> |
| 15   | 34              | 17             | 15             | 9.5            | 58.2              | 39.2           | 26             | 26             | 24.55          | 6.70           | 24 | 19.90          | 16.30                        | 16.20                        | 10.00          | 11.60          | 3.20           | 3.20           |
| 20   | 44              | 22             | 20             | 12.0           | 75.0              | 49.6           | 32             | 36             | 32.50          | 7.30           | 30 | 25.35          | 20.75                        | 20.55                        | 13.80          | 13.80          | 3.35           | 3.35           |
| 25   | 48              | 24             | 23             | 12.5           | 86.2              | 57.8           | 35             | 35             | 38.30          | 11.50          | 36 | 29.90          | 24.45                        | 24.25                        | 17.45          | 18.60          | 5.50           | 5.50           |
| 30   | 60              | 30             | 28             | 16.0           | 97.7              | 67.4           | 40             | 40             | 48.40          | 14.60          | 42 | 35.35          | 28.55                        | 28.35                        | 20.00          | 21.70          | 6.05           | 6.05           |
| 35   | 70              | 35             | 34             | 18.0           | 110.5             | 77.0           | 50             | 50             | 58.00          | 17.35          | 48 | 40.40          | 32.15                        | 31.85                        | 20.50          | 22.00          | 6.90           | 6.90           |
| 45   | 86              | 43             | 45             | 20.5           | 137.6             | 97.0           | 60             | 60             | 69.80          | 20.90          | 60 | 50.30          | 40.15                        | 39.85                        | 27.30          | 29.30          | 8.20           | 8.20           |


| Size | Dimensions (mm) |                                |                |                |                |     |                | Mass<br>(kg) | Load capacities <sup>3)</sup><br>(N) |         | Load moments <sup>3)</sup> (Nm) |                |                 |                |
|------|-----------------|--------------------------------|----------------|----------------|----------------|-----|----------------|--------------|--------------------------------------|---------|---------------------------------|----------------|-----------------|----------------|
|      | N <sub>3</sub>  | N <sub>6</sub> <sup>±0.5</sup> | S <sub>2</sub> | S <sub>5</sub> | S <sub>9</sub> | T   | V <sub>1</sub> |              | m                                    | C       | C <sub>0</sub>                  | M <sub>t</sub> | M <sub>t0</sub> | M <sub>L</sub> |
| 15   | 6.0             | 10.3                           | M4             | 4.5            | M2.5x3.5       | 60  | 5.0            | 0.15         | 9 860                                | 12 700  | 95                              | 120            | 68              | 87             |
| 20   | 7.5             | 13.2                           | M5             | 6.0            | M3x5           | 60  | 6.0            | 0.35         | 23 400                               | 29 800  | 300                             | 380            | 200             | 260            |
| 25   | 9.0             | 15.2                           | M6             | 7.0            | M3x5           | 60  | 7.5            | 0.50         | 28 600                               | 35 900  | 410                             | 510            | 290             | 360            |
| 30   | 12.0            | 17.0                           | M8             | 9.0            | M3x5           | 80  | 7.0            | 0.85         | 36 500                               | 48 100  | 630                             | 830            | 440             | 580            |
| 35   | 13.0            | 20.5                           | M8             | 9.0            | M3x5           | 80  | 8.0            | 1.25         | 51 800                               | 80 900  | 1 110                           | 1 740          | 720             | 1 130          |
| 45   | 18.0            | 23.5                           | M10            | 14.0           | M4x7           | 105 | 10.0           | 2.40         | 86 400                               | 132 000 | 2 330                           | 3 560          | 1 540           | 2 350          |

1) Dimension H<sub>2</sub> with cover strip

2) Dimension H<sub>2</sub> without cover strip

3) Load capacities and load moments for ball runner block **without** ball chain. Load capacities and load moments for ball runner block **with** ball chain 12 Determination of the dynamic load capacities and load moments is based on a travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** by 1.26 according to the table.

## SLS – Slimline, long, standard height

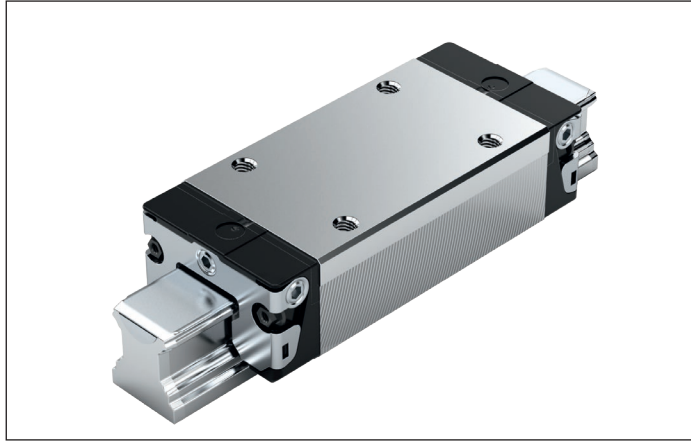**R1623 ... 2.****Dynamic characteristics**Travel speed:  $v_{\max} = 5 \text{ m/s}$ Acceleration:  $a_{\max} = 500 \text{ m/s}^2$ (If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )**Note on lubrication**

► Pre-lubricated

**Note**

Can be used on all SNS/SNO ball guide rails. Ball runner blocks of size 55 and size 65 can be found in chapter "Heavy-duty ball runner block BSHP made of steel" after this chapter.

**Options and material numbers**

| Size         | Ball runner blocks with size | Preload class |    |    |    | Accuracy class |   |   |    | Seals on ball runner blocks |                  |    |                 |                  |    |
|--------------|------------------------------|---------------|----|----|----|----------------|---|---|----|-----------------------------|------------------|----|-----------------|------------------|----|
|              |                              | C0            | C1 | C2 | C3 | N              | H | P | XP | without ball chain          |                  |    | with ball chain |                  |    |
|              |                              |               |    |    |    |                |   |   |    | SS                          | LS <sup>1)</sup> | DS | SS              | LS <sup>1)</sup> | DS |
| <b>15</b>    | R1623 1                      | 9             |    |    |    | 4              | 3 | – | –  | 20                          | 21               | –  | 22              | 23               | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
| <b>20</b>    | R1623 8                      | 9             |    |    |    | 4              | 3 | – | –  | 20                          | 21               | –  | 22              | 23               | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
| <b>25</b>    | R1623 2                      | 9             |    |    |    | 4              | 3 | – | –  | 20                          | 21               | –  | 22              | 23               | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
| <b>30</b>    | R1623 7                      | 9             |    |    |    | 4              | 3 | – | –  | 20                          | 21               | –  | 22              | 23               | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
| <b>35</b>    | R1623 3                      | 9             |    |    |    | 4              | 3 | – | –  | 20                          | 21               | –  | 22              | 23               | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
| <b>45</b>    | R1623 4                      | 9             |    |    |    | 4              | 3 | – | –  | 20                          | –                | –  | 22              | –                | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 20                          | –                | 2Z | 22              | –                | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 20                          | –                | 2Z | 22              | –                | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 20                          | –                | 2Z | 22              | –                | 2Y |
| <b>E.g.:</b> | R1623 7                      |               | 1  |    |    |                | 3 |   |    |                             | 20               |    |                 |                  |    |

1) Only for accuracy classes N and H and for XP in preload class C1.

**Ordering example**

Options:

- Ball runner block SLS
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1623 713 20

**Preload classes**

C0 = Without preload (clearance)  
 C1 = Moderate preload  
 C2 = Average preload  
 C3 = High preload


**Seals**

SS = Standard seal  
 LS = Low-friction seal  
 DS = Double-lip seal

**Key**

Gray numbers

= No preferred variants/combinations (partially longer delivery times)

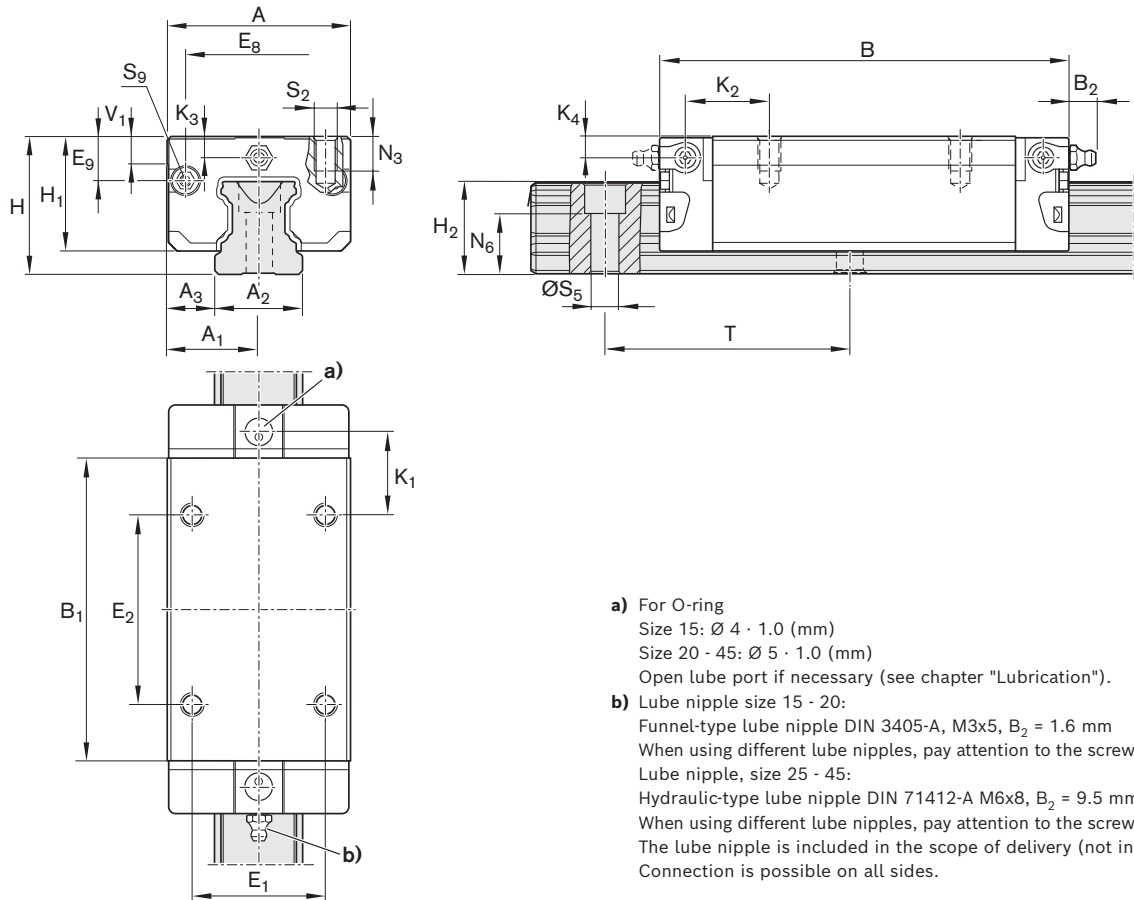

| Size | Dimensions (mm) |                |                |                |                   |                |                |                |                |                |    |                |                              |                              |                |                |                |                |  |
|------|-----------------|----------------|----------------|----------------|-------------------|----------------|----------------|----------------|----------------|----------------|----|----------------|------------------------------|------------------------------|----------------|----------------|----------------|----------------|--|
|      | A               | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | B <sup>+0.5</sup> | B <sub>1</sub> | E <sub>1</sub> | E <sub>2</sub> | E <sub>8</sub> | E <sub>9</sub> | H  | H <sub>1</sub> | H <sub>2</sub> <sup>1)</sup> | H <sub>2</sub> <sup>2)</sup> | K <sub>1</sub> | K <sub>2</sub> | K <sub>3</sub> | K <sub>4</sub> |  |
| 15   | 34              | 17             | 15             | 9.5            | 72.6              | 53.6           | 26             | 26             | 24.55          | 6.70           | 24 | 19.90          | 16.30                        | 16.20                        | 17.20          | 18.80          | 3.20           | 3.20           |  |
| 20   | 44              | 22             | 20             | 12.0           | 91.0              | 65.6           | 32             | 50             | 32.50          | 7.30           | 30 | 25.35          | 20.75                        | 20.55                        | 14.80          | 14.80          | 3.35           | 3.35           |  |
| 25   | 48              | 24             | 23             | 12.5           | 107.9             | 79.5           | 35             | 50             | 38.30          | 11.50          | 36 | 29.90          | 24.45                        | 24.25                        | 20.80          | 21.95          | 5.50           | 5.50           |  |
| 30   | 60              | 30             | 28             | 16.0           | 119.7             | 89.4           | 40             | 60             | 48.40          | 14.60          | 42 | 35.35          | 28.55                        | 28.35                        | 21.00          | 22.70          | 6.05           | 6.05           |  |
| 35   | 70              | 35             | 34             | 18.0           | 139.0             | 105.5          | 50             | 72             | 58.00          | 17.35          | 48 | 40.40          | 32.15                        | 31.85                        | 23.75          | 25.25          | 6.90           | 6.90           |  |
| 45   | 86              | 43             | 45             | 20.5           | 174.1             | 133.5          | 60             | 80             | 69.80          | 20.90          | 60 | 50.30          | 40.15                        | 39.85                        | 35.50          | 37.50          | 8.20           | 8.20           |  |


| Size | Dimensions (mm) |                                |                |                |                |     |                |      |         | Mass<br>(kg) | Load capacities <sup>3)</sup> (N) |                | Load moments <sup>3)</sup> (Nm) |                 |                |                 |
|------|-----------------|--------------------------------|----------------|----------------|----------------|-----|----------------|------|---------|--------------|-----------------------------------|----------------|---------------------------------|-----------------|----------------|-----------------|
|      | N <sub>3</sub>  | N <sub>6</sub> <sup>±0.5</sup> | S <sub>2</sub> | S <sub>5</sub> | S <sub>9</sub> | T   | V <sub>1</sub> |      | m       |              | C                                 | C <sub>0</sub> | M <sub>t</sub>                  | M <sub>t0</sub> | M <sub>L</sub> | M <sub>L0</sub> |
| 15   | 6.0             | 10.3                           | M4             | 4.5            | M2.5x3.5       | 60  | 5.0            | 0.20 | 12 800  | 18 400       | 120                               | 180            | 120                             | 180             |                |                 |
| 20   | 7.5             | 13.2                           | M5             | 6.0            | M3x5           | 60  | 6.0            | 0.45 | 29 600  | 41 800       | 380                               | 540            | 340                             | 490             |                |                 |
| 25   | 9.0             | 15.2                           | M6             | 7.0            | M3x5           | 60  | 7.5            | 0.65 | 37 300  | 52 500       | 530                               | 750            | 530                             | 740             |                |                 |
| 30   | 12.0            | 17.0                           | M8             | 9.0            | M3x5           | 80  | 7.0            | 1.10 | 46 000  | 66 900       | 800                               | 1 160          | 740                             | 1 080           |                |                 |
| 35   | 13.0            | 20.5                           | M8             | 9.0            | M3x5           | 80  | 8.0            | 1.70 | 66 700  | 116 000      | 1 440                             | 2 500          | 1 290                           | 2 240           |                |                 |
| 45   | 18.0            | 23.5                           | M10            | 14.0           | M4x7           | 105 | 10.0           | 3.20 | 111 000 | 190 000      | 3 010                             | 5 120          | 2 730                           | 4 660           |                |                 |

1) Dimension H<sub>2</sub> with cover strip

2) Dimension H<sub>2</sub> without cover strip

3) Load capacities and load moments for ball runner block **without** ball chain. Load capacities and load moments for ball runner block **with** ball chain 12 Determination of the dynamic load capacities and load moments is based on a travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** by 1.26 according to the table.

SKS – Slimline, short, standard height

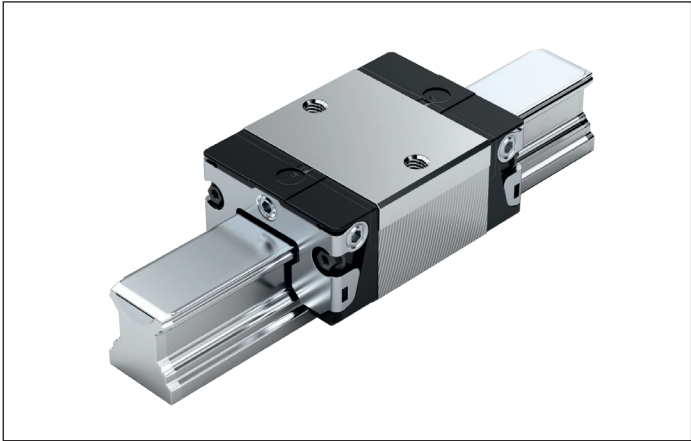

R1666 ... 2.

Dynamic characteristics

Travel speed:  $v_{\max} = 5 \text{ m/s}$   
 Acceleration:  $a_{\max} = 500 \text{ m/s}^2$   
 (If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

Note on lubrication

▶ Pre-lubricated

Note

Can be used on all SNS/SNO ball guide rails.

Options and material numbers

| Size  | Ball runner blocks with size | Preload class |    | Accuracy class |   | Seals on ball runner blocks |    |    |                 |    |    |
|-------|------------------------------|---------------|----|----------------|---|-----------------------------|----|----|-----------------|----|----|
|       |                              | C0            | C1 | N              | H | without ball chain          |    |    | with ball chain |    |    |
|       |                              |               |    |                |   | SS                          | LS | DS | SS              | LS | DS |
| 15    | R1666 1                      | 9             |    | 4              | 3 | 20                          | 21 | –  | 22              | 23 | –  |
|       |                              |               | 1  | 4              | 3 | 20                          | 21 | 2Z | 22              | 23 | 2Y |
| 20    | R1666 8                      | 9             |    | 4              | 3 | 20                          | 21 | –  | 22              | 23 | –  |
|       |                              |               | 1  | 4              | 3 | 20                          | 21 | 2Z | 22              | 23 | 2Y |
| 25    | R1666 2                      | 9             |    | 4              | 3 | 20                          | 21 | –  | 22              | 23 | –  |
|       |                              |               | 1  | 4              | 3 | 20                          | 21 | 2Z | 22              | 23 | 2Y |
| 30    | R1666 7                      | 9             |    | 4              | 3 | 20                          | 21 | –  | 22              | 23 | –  |
|       |                              |               | 1  | 4              | 3 | 20                          | 21 | 2Z | 22              | 23 | 2Y |
| 35    | R1666 3                      | 9             |    | 4              | 3 | 20                          | 21 | –  | 22              | 23 | –  |
|       |                              |               | 1  | 4              | 3 | 20                          | 21 | 2Z | 22              | 23 | 2Y |
| E.g.: | R1666 7                      |               | 1  |                | 3 | 20                          |    |    |                 |    |    |

Ordering example

Options:

- ▶ Ball runner block SKS
- ▶ Size 30
- ▶ Preload class C1
- ▶ Accuracy class H
- ▶ With standard seal, without ball chain

Material number:

R1666 713 20

Preload classes

C0 = Without preload (clearance)  
 C1 = Moderate preload


Seals

SS = Standard seal  
 LS = Low-friction seal  
 DS = Double-lip seal

Key

Gray numbers  
 = No preferred variants/combinations (partially longer delivery times)



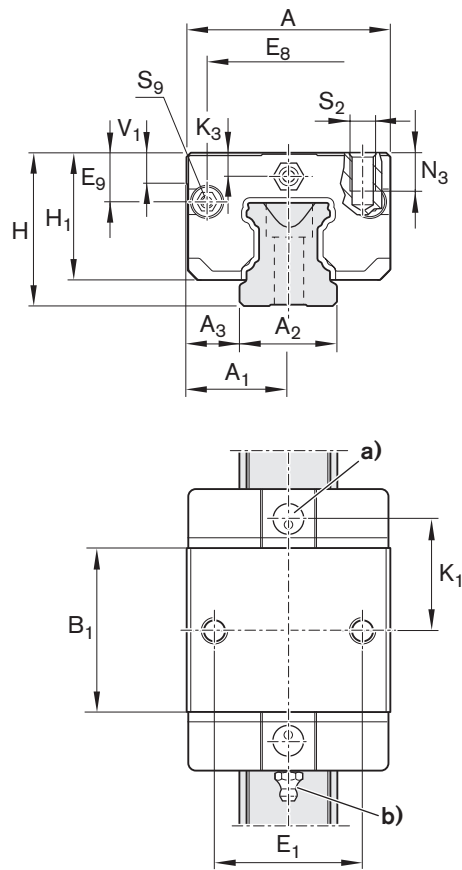


- a)** For O-ring  
 Size 15:  $\varnothing 4 \cdot 1.0$  (mm)  
 Size 20 - 35:  $\varnothing 5 \cdot 1.0$  (mm)  
 Open lube port if necessary (see chapter "Lubrication").
- b)** Lube nipple size 15 - 20:  
 Funnel-type lube nipple DIN 3405-A, M3x5,  $B_2 = 1.6$  mm  
 When using different lube nipples, pay attention to the screw-in depth of 5 mm!  
 Lube nipple, size 25 - 35:  
 Hydraulic-type lube nipple DIN 71412-A M6x8,  $B_2 = 9.5$  mm  
 When using different lube nipples, pay attention to the screw-in depth of 8 mm!  
 The lube nipple is included in the scope of delivery (not installed).  
 Connection is possible on all sides.

| Size | Dimensions (mm) |                |                |                |                   |                |                |                |                |    |                |                              |                              |                |                |                |                |
|------|-----------------|----------------|----------------|----------------|-------------------|----------------|----------------|----------------|----------------|----|----------------|------------------------------|------------------------------|----------------|----------------|----------------|----------------|
|      | A               | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | B <sup>+0.5</sup> | B <sub>1</sub> | E <sub>1</sub> | E <sub>8</sub> | E <sub>9</sub> | H  | H <sub>1</sub> | H <sub>2</sub> <sup>1)</sup> | H <sub>2</sub> <sup>2)</sup> | K <sub>1</sub> | K <sub>2</sub> | K <sub>3</sub> | K <sub>4</sub> |
| 15   | 34              | 17             | 15             | 9.5            | 44.7              | 25.7           | 26             | 24.55          | 6.70           | 24 | 19.90          | 16.30                        | 16.20                        | 16.25          | 17.85          | 3.20           | 3.20           |
| 20   | 44              | 22             | 20             | 12.0           | 57.3              | 31.9           | 32             | 32.50          | 7.30           | 30 | 25.35          | 20.75                        | 20.55                        | 22.95          | 22.95          | 3.35           | 3.35           |
| 25   | 48              | 24             | 23             | 12.5           | 67.0              | 38.6           | 35             | 38.30          | 11.50          | 36 | 29.90          | 24.45                        | 24.25                        | 25.35          | 26.50          | 5.50           | 5.50           |
| 30   | 60              | 30             | 28             | 16.0           | 75.3              | 45.0           | 40             | 48.40          | 14.60          | 42 | 35.35          | 28.55                        | 28.35                        | 28.80          | 30.50          | 6.05           | 6.05           |
| 35   | 70              | 35             | 34             | 18.0           | 84.9              | 51.4           | 50             | 58.00          | 17.35          | 48 | 40.40          | 32.15                        | 31.85                        | 32.70          | 34.20          | 6.90           | 6.90           |

| Size | Dimensions (mm) |                                |                |                |                |    |                | Mass<br>(kg) | Load capacities <sup>3)</sup><br>(N) |                | Load moments <sup>3)</sup> (Nm) |                 |                |                 |
|------|-----------------|--------------------------------|----------------|----------------|----------------|----|----------------|--------------|--------------------------------------|----------------|---------------------------------|-----------------|----------------|-----------------|
|      | N <sub>3</sub>  | N <sub>6</sub> <sup>±0.5</sup> | S <sub>2</sub> | S <sub>5</sub> | S <sub>9</sub> | T  | V <sub>1</sub> |              | C                                    | C <sub>0</sub> | M <sub>t</sub>                  | M <sub>t0</sub> | M <sub>L</sub> | M <sub>L0</sub> |
| 15   | 6.0             | 10.3                           | M4             | 4.5            | M2.5x3.5       | 60 | 5.0            | 0.10         | 6 720                                | 7 340          | 65                              | 71              | 29             | 32              |
| 20   | 7.5             | 13.2                           | M5             | 6.0            | M3x5           | 60 | 6.0            | 0.25         | 15 400                               | 16 500         | 200                             | 210             | 83             | 89              |
| 25   | 9.0             | 15.2                           | M6             | 7.0            | M3x5           | 60 | 7.5            | 0.35         | 19 800                               | 21 200         | 280                             | 300             | 130            | 140             |
| 30   | 12.0            | 17.0                           | M8             | 9.0            | M3x5           | 80 | 7.0            | 0.60         | 25 600                               | 28 900         | 440                             | 500             | 200            | 230             |
| 35   | 13.0            | 20.5                           | M8             | 9.0            | M3x5           | 80 | 8.0            | 0.90         | 36 600                               | 49 300         | 790                             | 1 060           | 340            | 460             |

- 1)** Dimension H<sub>2</sub> with cover strip  
**2)** Dimension H<sub>2</sub> without cover strip  
**3)** Load capacities and load moments for ball runner block **without** ball chain. Load capacities and load moments for ball runner block **with** ball chain 12 Determination of the dynamic load capacities and load moments is based on a travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** by 1.26 according to the table.

## SNH – Slimline, normal, high

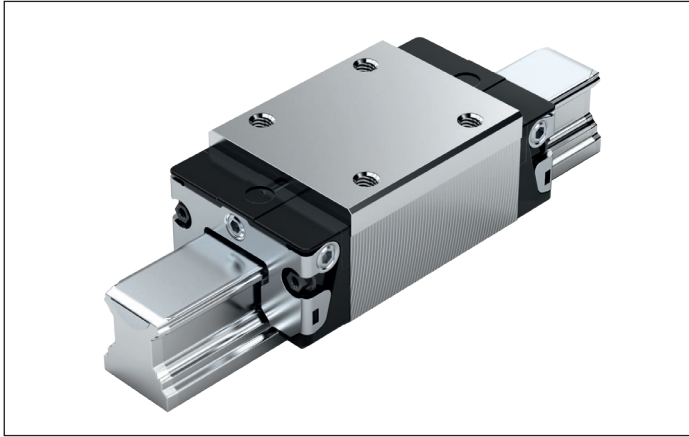**R1621 ... 2.****Dynamic characteristics**

Travel speed:  $v_{\max} = 5 \text{ m/s}$   
 Acceleration:  $a_{\max} = 500 \text{ m/s}^2$   
 (If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

**Note on lubrication**

► Pre-lubricated

**Note**

Can be used on all SNS/SNO ball guide rails. Ball runner blocks of size 55 can be found in chapter "Heavy-duty ball runner block BSHP made of steel" after this chapter.

**Options and material numbers**

| Size         | Ball runner blocks with size | Preload class |    |    |    | Accuracy class |   |   |    | Seals on ball runner blocks |                  |    |                 |                  |    |
|--------------|------------------------------|---------------|----|----|----|----------------|---|---|----|-----------------------------|------------------|----|-----------------|------------------|----|
|              |                              | C0            | C1 | C2 | C3 | N              | H | P | XP | without ball chain          |                  |    | with ball chain |                  |    |
|              |                              |               |    |    |    |                |   |   |    | SS                          | LS <sup>1)</sup> | DS | SS              | LS <sup>1)</sup> | DS |
| <b>15</b>    | R1621 1                      | 9             |    |    |    | 4              | 3 | – | –  | 20                          | 21               | –  | 22              | 23               | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
| <b>25</b>    | R1621 2                      | 9             |    |    |    | 4              | 3 | – | –  | 20                          | 21               | –  | 22              | 23               | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
| <b>30</b>    | R1621 7                      | 9             |    |    |    | 4              | 3 | – | –  | 20                          | 21               | –  | 22              | 23               | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
| <b>35</b>    | R1621 3                      | 9             |    |    |    | 4              | 3 | – | –  | 20                          | 21               | –  | 22              | 23               | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 20                          | 21               | 2Z | 22              | 23               | 2Y |
| <b>45</b>    | R1621 4                      | 9             |    |    |    | 4              | 3 | – | –  | 20                          | –                | –  | 22              | –                | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 20                          | –                | 2Z | 22              | –                | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 20                          | –                | 2Z | 22              | –                | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 20                          | –                | 2Z | 22              | –                | 2Y |
| <b>E.g.:</b> | R1621 7                      |               | 1  |    |    |                | 3 |   |    | 20                          |                  |    |                 |                  |    |

1) Only for accuracy classes N and H and for XP in preload class C1.

**Ordering example**

Options:

- Ball runner block SNH
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1621 713 20

**Preload classes**

C0 = Without preload (clearance)  
 C1 = Moderate preload  
 C2 = Average preload  
 C3 = High preload


**Seals**

SS = Standard seal  
 LS = Low-friction seal  
 DS = Double-lip seal

**Key**

Gray numbers

= No preferred variants/combinations (partially longer delivery times)

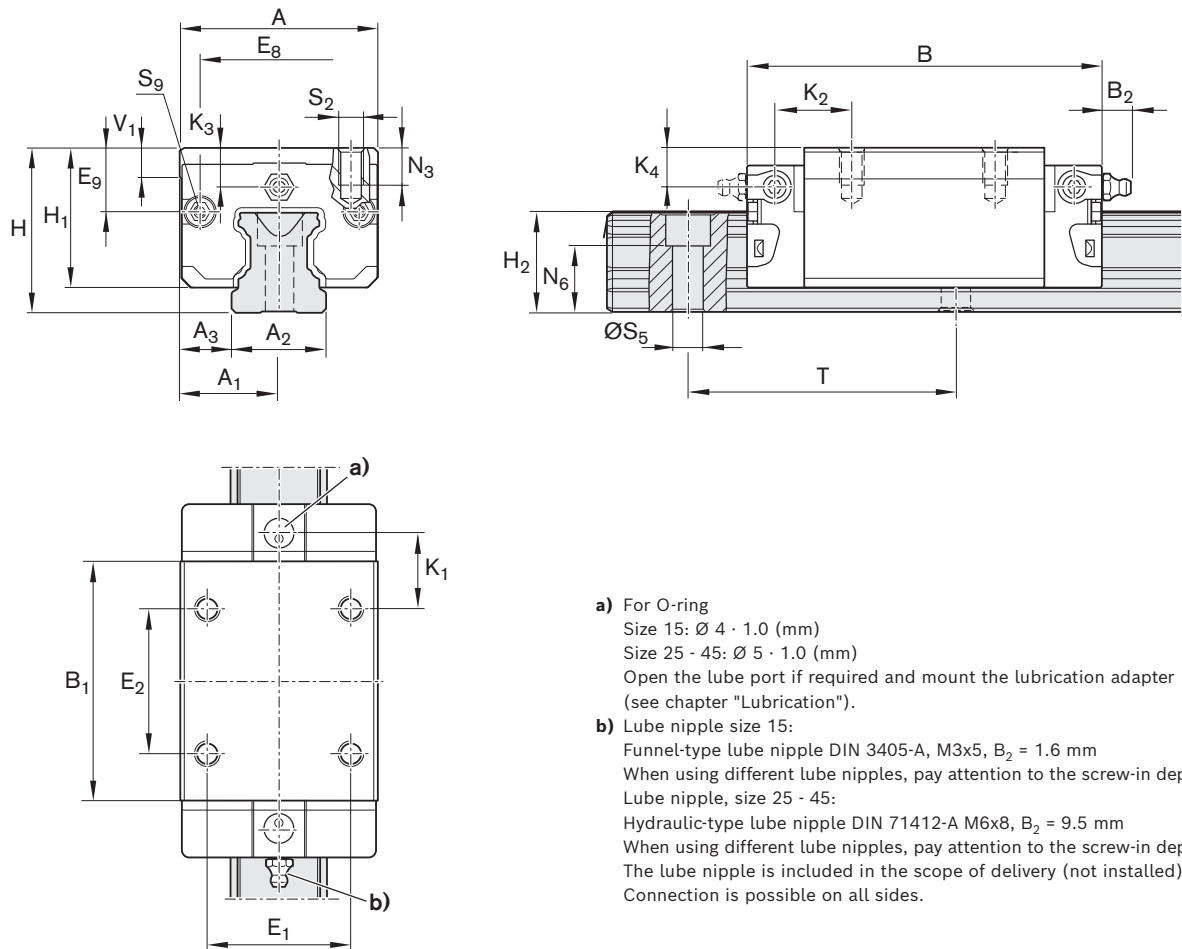

| Size | Dimensions (mm) |                |                |                |                   |                |                |                |                |                |    |                |                              |                              |                |                |                |                |
|------|-----------------|----------------|----------------|----------------|-------------------|----------------|----------------|----------------|----------------|----------------|----|----------------|------------------------------|------------------------------|----------------|----------------|----------------|----------------|
|      | A               | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | B <sup>+0.5</sup> | B <sub>1</sub> | E <sub>1</sub> | E <sub>2</sub> | E <sub>8</sub> | E <sub>9</sub> | H  | H <sub>1</sub> | H <sub>2</sub> <sup>1)</sup> | H <sub>2</sub> <sup>2)</sup> | K <sub>1</sub> | K <sub>2</sub> | K <sub>3</sub> | K <sub>4</sub> |
| 15   | 34              | 17             | 15             | 9.5            | 58.2              | 39.2           | 26             | 26             | 24.55          | 10.70          | 28 | 23.90          | 16.30                        | 16.20                        | 10.00          | 11.60          | 7.20           | 7.20           |
| 25   | 48              | 24             | 23             | 12.5           | 86.2              | 57.8           | 35             | 35             | 38.30          | 15.50          | 40 | 33.90          | 24.45                        | 24.25                        | 17.45          | 18.60          | 9.50           | 9.50           |
| 30   | 60              | 30             | 28             | 16.0           | 97.7              | 67.4           | 40             | 40             | 48.40          | 17.60          | 45 | 38.35          | 28.55                        | 28.35                        | 20.00          | 21.70          | 9.05           | 9.05           |
| 35   | 70              | 35             | 34             | 18.0           | 110.5             | 77.0           | 50             | 50             | 58.00          | 24.35          | 55 | 47.40          | 32.15                        | 31.85                        | 20.50          | 22.00          | 13.90          | 13.90          |
| 45   | 86              | 43             | 45             | 20.5           | 137.6             | 97.0           | 60             | 60             | 69.80          | 30.90          | 70 | 60.30          | 40.15                        | 39.85                        | 27.30          | 29.30          | 18.20          | 18.20          |


| Size | Dimensions (mm) |                                |                |                |                |     |                | Mass<br>(kg) | Load capacities <sup>3)</sup> (N)                                                    |                | Load moments <sup>3)</sup> (Nm)                                                       |                 |                                                                                       |                |                                                                                       |
|------|-----------------|--------------------------------|----------------|----------------|----------------|-----|----------------|--------------|--------------------------------------------------------------------------------------|----------------|---------------------------------------------------------------------------------------|-----------------|---------------------------------------------------------------------------------------|----------------|---------------------------------------------------------------------------------------|
|      | N <sub>3</sub>  | N <sub>6</sub> <sup>±0.5</sup> | S <sub>2</sub> | S <sub>5</sub> | S <sub>9</sub> | T   | V <sub>1</sub> |              |  | C <sub>0</sub> |  | M <sub>t0</sub> |  | M <sub>L</sub> |  |
| 15   | 6.0             | 10.3                           | M4             | 4.5            | M2.5x3.5       | 60  | 5.0            | 0.20         | 9 860                                                                                | 12 700         | 95                                                                                    | 120             | 68                                                                                    |                | 87                                                                                    |
| 25   | 9.0             | 15.2                           | M6             | 7.0            | M3x5           | 60  | 7.5            | 0.60         | 28 600                                                                               | 35 900         | 410                                                                                   | 510             | 290                                                                                   |                | 360                                                                                   |
| 30   | 12.0            | 17.0                           | M8             | 9.0            | M3x5           | 80  | 7.0            | 0.95         | 36 500                                                                               | 48 100         | 630                                                                                   | 830             | 440                                                                                   |                | 580                                                                                   |
| 35   | 13.0            | 20.5                           | M8             | 9.0            | M3x5           | 80  | 8.0            | 1.55         | 51 800                                                                               | 80 900         | 1 110                                                                                 | 1 740           | 720                                                                                   |                | 1 130                                                                                 |
| 45   | 18.0            | 23.5                           | M10            | 14.0           | M4x7           | 105 | 10.0           | 3.00         | 86 400                                                                               | 132 000        | 2 330                                                                                 | 3 560           | 1 540                                                                                 |                | 2 350                                                                                 |

1) Dimension H<sub>2</sub> with cover strip

2) Dimension H<sub>2</sub> without cover strip

3) Load capacities and load moments for ball runner block **without** ball chain. Load capacities and load moments for ball runner block **with** ball chain 12 Determination of the dynamic load capacities and load moments is based on a travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** by 1.26 according to the table.

## SLH – Slimline, long, high

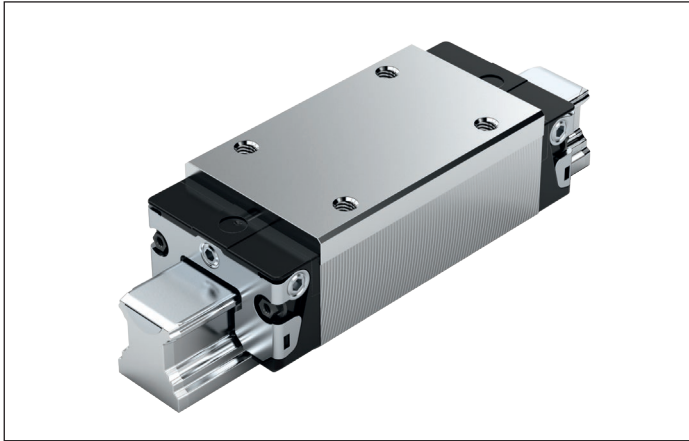**R1624 ... 2.****Dynamic characteristics**

Travel speed:  $v_{\max} = 5 \text{ m/s}$   
 Acceleration:  $a_{\max} = 500 \text{ m/s}^2$   
 (If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

**Note on lubrication**

► Pre-lubricated

**Note**

Can be used on all SNS/SNO ball guide rails. Ball runner blocks of size 55 can be found in chapter "Heavy-duty ball runner block BSHP made of steel" after this chapter.

**Options and material numbers**

| Size         | Ball runner blocks with size | Preload class |    |    |    | Accuracy class |   |   |    | Seals on ball runner blocks |    |    |                 |    |    |
|--------------|------------------------------|---------------|----|----|----|----------------|---|---|----|-----------------------------|----|----|-----------------|----|----|
|              |                              | C0            | C1 | C2 | C3 | N              | H | P | XP | without ball chain          |    |    | with ball chain |    |    |
| <b>25</b>    | R1624 2                      | 9             |    |    |    | 4              | 3 | – | –  | 20                          | 21 | –  | 22              | 23 | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
| <b>30</b>    | R1624 7                      | 9             |    |    |    | 4              | 3 | – | –  | 20                          | 21 | –  | 22              | 23 | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
| <b>35</b>    | R1624 3                      | 9             |    |    |    | 4              | 3 | – | –  | 20                          | 21 | –  | 22              | 23 | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 20                          | 21 | 2Z | 22              | 23 | 2Y |
| <b>45</b>    | R1624 4                      | 9             |    |    |    | 4              | 3 | – | –  | 20                          | –  | –  | 22              | –  | –  |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 8  | 20                          | –  | 2Z | 22              | –  | 2Y |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 8  | 20                          | –  | 2Z | 22              | –  | 2Y |
|              |                              |               |    |    | 3  | –              | – | – | 8  | 20                          | –  | 2Z | 22              | –  | 2Y |
| <b>E.g.:</b> | R16247                       | 1             |    |    |    | 3              |   |   |    | 20                          |    |    |                 |    |    |

1) Only for accuracy classes N and H and for XP in preload class C1.

**Ordering example**

Options:

- Ball runner block SLH
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1624 713 20

**Preload classes**

C0 = Without preload (clearance)  
 C1 = Moderate preload  
 C2 = Average preload  
 C3 = High preload


**Seals**

SS = Standard seal  
 LS = Low-friction seal  
 DS = Double-lip seal


**Key**

Gray numbers

= No preferred variants/combinations (partially longer delivery times)

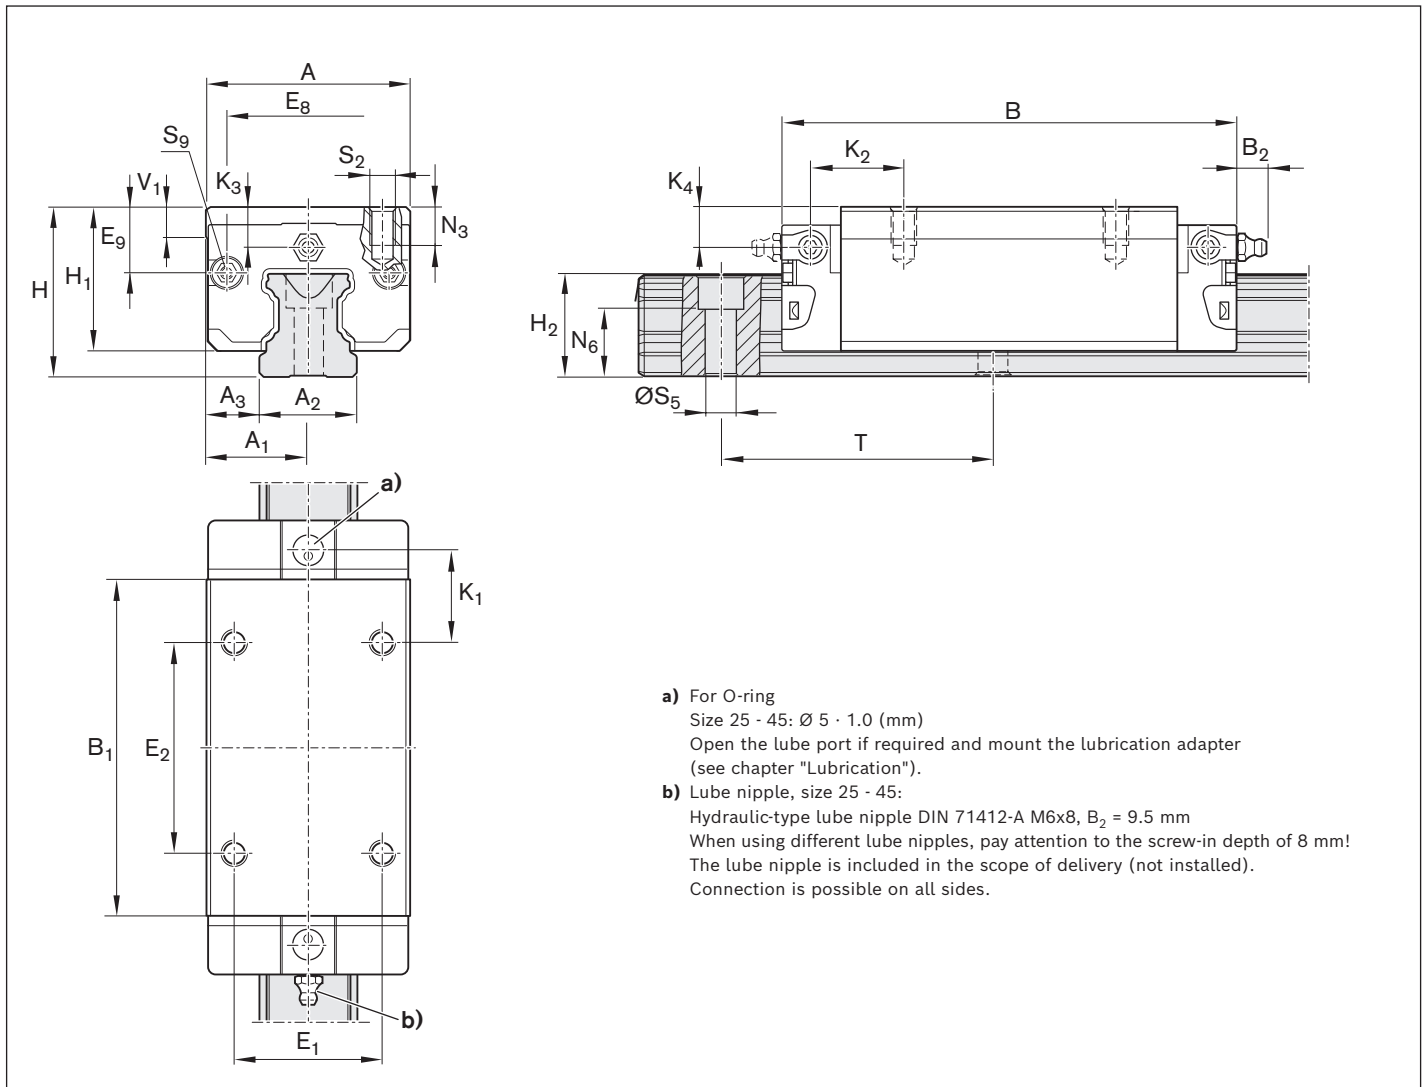

| Size | Dimensions (mm) |                |                |                |                   |                |                |                |                |                |    |                |                              |                              |                |                |                |                |
|------|-----------------|----------------|----------------|----------------|-------------------|----------------|----------------|----------------|----------------|----------------|----|----------------|------------------------------|------------------------------|----------------|----------------|----------------|----------------|
|      | A               | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | B <sup>+0.5</sup> | B <sub>1</sub> | E <sub>1</sub> | E <sub>2</sub> | E <sub>8</sub> | E <sub>9</sub> | H  | H <sub>1</sub> | H <sub>2</sub> <sup>1)</sup> | H <sub>2</sub> <sup>2)</sup> | K <sub>1</sub> | K <sub>2</sub> | K <sub>3</sub> | K <sub>4</sub> |
| 25   | 48              | 24             | 23             | 12.5           | 107.9             | 79.5           | 35             | 50             | 38.30          | 15.50          | 40 | 33.90          | 24.45                        | 24.25                        | 20.80          | 21.95          | 9.50           | 9.50           |
| 30   | 60              | 30             | 28             | 16.0           | 119.7             | 89.4           | 40             | 60             | 48.40          | 17.60          | 45 | 38.35          | 28.55                        | 28.35                        | 21.00          | 22.70          | 9.05           | 9.05           |
| 35   | 70              | 35             | 34             | 18.0           | 139.0             | 105.5          | 50             | 72             | 58.00          | 24.35          | 55 | 47.40          | 32.15                        | 31.85                        | 23.75          | 25.25          | 13.90          | 13.90          |
| 45   | 86              | 43             | 45             | 20.5           | 174.1             | 133.5          | 60             | 80             | 69.80          | 30.90          | 70 | 60.30          | 40.15                        | 39.85                        | 35.50          | 37.50          | 18.20          | 18.20          |


| Size | Dimensions (mm) |                                |                |                |                |     |                |      | Mass<br>(kg) | Load capacities <sup>3)</sup><br>(N)                                                 |       | Load moments <sup>3)</sup> (Nm)                                                       |       |                                                                                       |  |
|------|-----------------|--------------------------------|----------------|----------------|----------------|-----|----------------|------|--------------|--------------------------------------------------------------------------------------|-------|---------------------------------------------------------------------------------------|-------|---------------------------------------------------------------------------------------|--|
|      | N <sub>3</sub>  | N <sub>6</sub> <sup>±0.5</sup> | S <sub>2</sub> | S <sub>5</sub> | S <sub>9</sub> | T   | V <sub>1</sub> | m    |              |  |       |  |       |  |  |
| 25   | 9.0             | 15.2                           | M6             | 7.0            | M3x5           | 60  | 7.5            | 0.80 | 37 300       | 52 500                                                                               | 530   | 750                                                                                   | 530   | 740                                                                                   |  |
| 30   | 12.0            | 17.0                           | M8             | 9.0            | M3x5           | 80  | 7.0            | 1.20 | 46 000       | 66 900                                                                               | 800   | 1 160                                                                                 | 740   | 1 080                                                                                 |  |
| 35   | 13.0            | 20.5                           | M8             | 9.0            | M3x5           | 80  | 8.0            | 2.10 | 66 700       | 116 000                                                                              | 1 440 | 2 500                                                                                 | 1 290 | 2 240                                                                                 |  |
| 45   | 18.0            | 23.5                           | M10            | 14.0           | M4x7           | 105 | 10.0           | 4.10 | 111 000      | 190 000                                                                              | 3 010 | 5 120                                                                                 | 2 730 | 4 660                                                                                 |  |

1) Dimension H<sub>2</sub> with cover strip

2) Dimension H<sub>2</sub> without cover strip

3) Load capacities and load moments for ball runner block **without** ball chain. Load capacities and load moments for ball runner block **with** ball chain  12 Determination of the dynamic load capacities and load moments is based on a travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values C, M<sub>t</sub> and M<sub>L</sub> by 1.26 according to the table.

FNN – Flange, normal, low

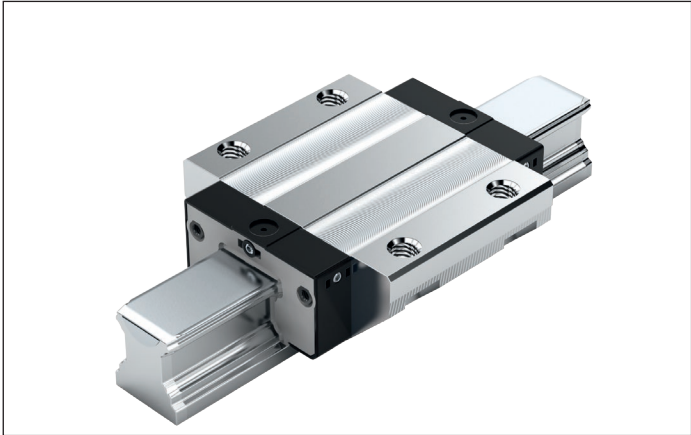

R1693 ... 1.

Dynamic characteristics

Travel speed:  $v_{\max} = 3 \text{ m/s}$   
Acceleration:  $a_{\max} = 250 \text{ m/s}^2$   
(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

Note on lubrication

► No initial lubrication

Note

Can be used on all SNS/SNO ball guide rails.

Options and material numbers

| Size             | Ball runner blocks with size | Preload class |    | Accuracy class |   | Seals on ball runner blocks without ball chain |    |
|------------------|------------------------------|---------------|----|----------------|---|------------------------------------------------|----|
|                  |                              | C0            | C1 | N              | H | SS                                             | LS |
| 20               | R1693 8                      | 9             | 1  | 4              | 3 | 10                                             | 11 |
| 25 <sup>1)</sup> | R1693 2                      | 9             | 1  | 4              | 3 | 10                                             | 11 |
| E.g.:            | R1693 8                      |               | 1  |                | 3 | 10                                             |    |

1) Ball runner block BSHP

Ordering example

Options:

- Ball runner block FNN
- Size 20
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1693 813 10

Preload classes




C0 = Without preload (clearance)  
C1 = Moderate preload

Seals

SS = Standard seal  
LS = Low-friction seal

Key

Gray numbers  
= No preferred variants/combinations (partially longer delivery times)

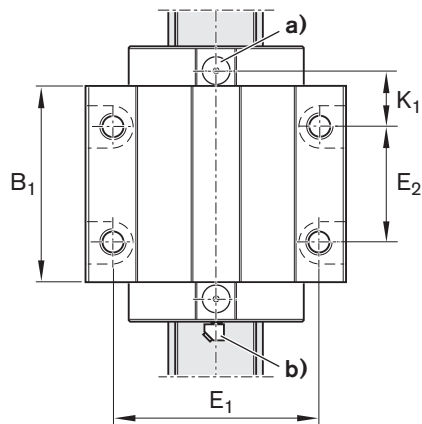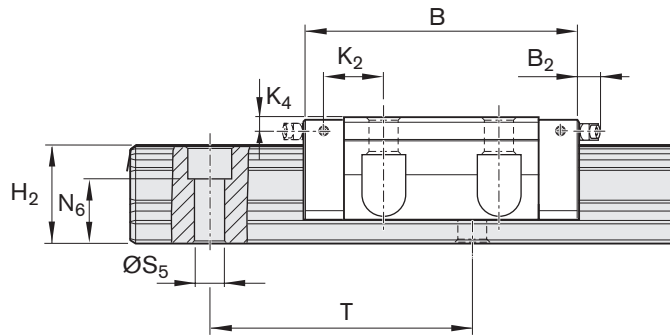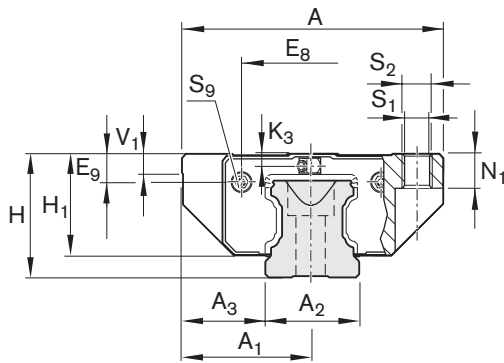

- a) For O-ring  
Size 20 - 25:  $\varnothing 5 \cdot 1.0$  (mm)  
Open lube port if necessary (see chapter "Lubrication").
- b) Lube nipple, size 20 - 25:  
Funnel-type lube nipple DIN 3405-B, M3x5,  $B_2 = 8$  mm  
Lube connection with additional anti-twist feature.  
When using different lube nipples, pay attention to the screw-in depth of 5 mm!  
The lube nipple is included in the scope of delivery (not installed).  
Size 20: Connection is possible on end-face.  
Size 25: Connection is possible on all sides.

| Size | Dimensions (mm) |                |                |                |                   |                |                |                |                |                |    |                |                              |                              |                |                |                |                |
|------|-----------------|----------------|----------------|----------------|-------------------|----------------|----------------|----------------|----------------|----------------|----|----------------|------------------------------|------------------------------|----------------|----------------|----------------|----------------|
|      | A               | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | B <sup>+0.5</sup> | B <sub>1</sub> | E <sub>1</sub> | E <sub>2</sub> | E <sub>8</sub> | E <sub>9</sub> | H  | H <sub>1</sub> | H <sub>2</sub> <sup>1)</sup> | H <sub>2</sub> <sup>2)</sup> | K <sub>1</sub> | K <sub>2</sub> | K <sub>3</sub> | K <sub>4</sub> |
| 20   | 59              | 29.5           | 20             | 19.5           | 72.5              | 49.6           | 49             | 32             | 30.5           | 5.6            | 28 | 23.0           | 20.75                        | 20.55                        | 13.0           | –              | 3.6            | –              |
| 25   | 73              | 36.5           | 23             | 25.0           | 81.0              | 57.8           | 60             | 35             | 38.3           | 8.5            | 33 | 26.5           | 24.45                        | 24.25                        | 16.6           | 17.0           | 4.1            | 4.1            |

| Size | Dimensions (mm) |                                |                |                |                |                |    |                | Mass<br>(kg) | Load capacities <sup>3)</sup><br>(N)<br> | Load moments <sup>3)</sup> (Nm)<br> |     |                |                |                 |                |
|------|-----------------|--------------------------------|----------------|----------------|----------------|----------------|----|----------------|--------------|-------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|-----|----------------|----------------|-----------------|----------------|
|      | N <sub>1</sub>  | N <sub>6</sub> <sup>±0.5</sup> | S <sub>1</sub> | S <sub>2</sub> | S <sub>5</sub> | S <sub>9</sub> | T  | V <sub>1</sub> |              |                                                                                                                               | m                                                                                                                        | C   | C <sub>0</sub> | M <sub>t</sub> | M <sub>t0</sub> | M <sub>L</sub> |
| 20   | 7.7             | 13.2                           | 5.3            | M6             | 6.0            | M3x5           | 60 | 6.0            | 0.40         | 14 500                                                                                                                        | 24 400                                                                                                                   | 190 | 310            | 100            | 165             |                |
| 25   | 9.3             | 15.2                           | 6.7            | M8             | 7.0            | M3x5           | 60 | 7.5            | 0.60         | 28 600                                                                                                                        | 35 900                                                                                                                   | 410 | 510            | 290            | 360             |                |


1) Dimension H<sub>2</sub> with cover strip

2) Dimension H<sub>2</sub> without cover strip

3) Load capacities and load moments for ball runner block **without** ball chain.

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** by 1.26 according to the table.

FKN – Flange, short, low

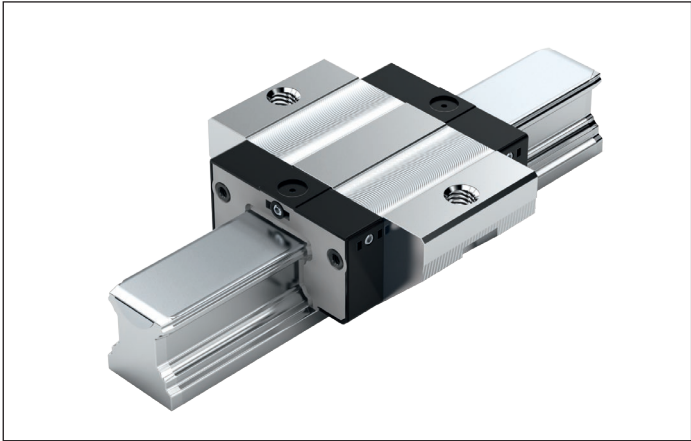

R1663 ... 1.

Dynamic characteristics

Travel speed:  $v_{\max} = 3 \text{ m/s}$   
Acceleration:  $a_{\max} = 250 \text{ m/s}^2$   
(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

Note on lubrication

► No initial lubrication

Note

Can be used on all SNS/SNO ball guide rails.

Options and material numbers

| Size             | Ball runner blocks with size | Preload class |    | Accuracy class |   | Seals on ball runner blocks without ball chain |    |
|------------------|------------------------------|---------------|----|----------------|---|------------------------------------------------|----|
|                  |                              | C0            | C1 | N              | H | SS                                             | LS |
| 20               | R1663 8                      | 9             | 1  | 4              | 3 | 10                                             | 11 |
| 25 <sup>1)</sup> | R1663 2                      | 9             | 1  | 4              | 3 | 10                                             | 11 |
| E.g.:            | R1663 8                      |               | 1  |                | 3 | 10                                             |    |

1) Ball runner block BSHP

Ordering example

Options:

- Ball runner block FKN
- Size 20
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1663 813 10

Preload classes

C0 = Without preload (clearance)  
C1 = Moderate preload




Seals

SS = Standard seal  
LS = Low-friction seal

Key

Gray numbers  
= No preferred variants/combinations (partially longer delivery times)



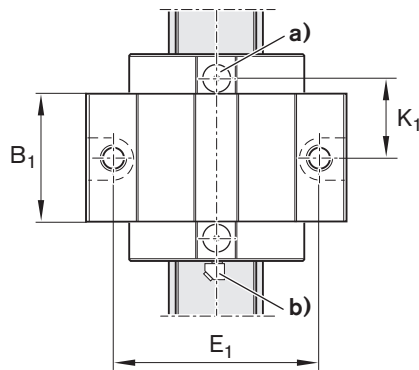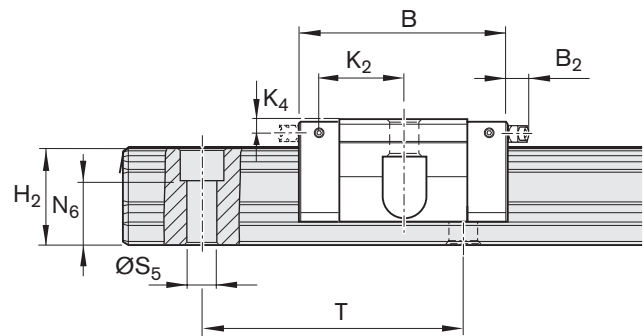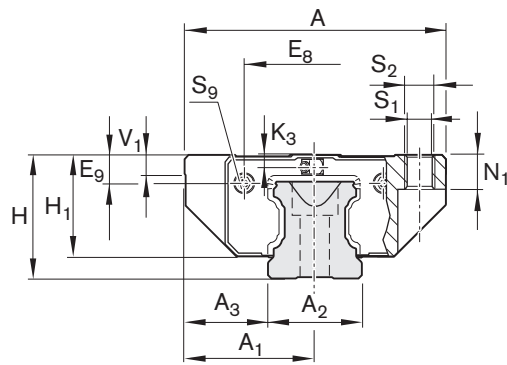

- a) For O-ring  
Size 20 - 25:  $\varnothing 5 \cdot 1.0$  (mm)  
Open lube port if necessary (see chapter "Lubrication").
- b) Lube nipple, size 20 - 25:  
Funnel-type lube nipple DIN 3405-B, M3x5,  $B_2 = 8$  mm  
Lube connection with additional anti-twist feature.  
When using different lube nipples, pay attention to the screw-in depth of 5 mm!  
The lube nipple is included in the scope of delivery (not installed).  
Size 20: Connection is possible on end-face.  
Size 25: Connection is possible on all sides.

| Size | Dimensions (mm) |                |                |                |                   |                |                |                |                |    |                |                              |                              |                |                |                |                |
|------|-----------------|----------------|----------------|----------------|-------------------|----------------|----------------|----------------|----------------|----|----------------|------------------------------|------------------------------|----------------|----------------|----------------|----------------|
|      | A               | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | B <sup>+0.5</sup> | B <sub>1</sub> | E <sub>1</sub> | E <sub>8</sub> | E <sub>9</sub> | H  | H <sub>1</sub> | H <sub>2</sub> <sup>1)</sup> | H <sub>2</sub> <sup>2)</sup> | K <sub>1</sub> | K <sub>2</sub> | K <sub>3</sub> | K <sub>4</sub> |
| 20   | 59              | 29.5           | 20             | 19.5           | 55                | 31.9           | 49             | 30.5           | 5.6            | 28 | 23.0           | 20.75                        | 20.55                        | 20.1           | –              | 3.6            | –              |
| 25   | 73              | 36.5           | 23             | 25.0           | 62                | 38.6           | 60             | 38.3           | 8.5            | 33 | 26.5           | 24.45                        | 24.25                        | 24.5           | 25.0           | 4.1            | 4.1            |

| Size | Dimensions (mm) |                                |                |                |                |                |    |                | Mass<br>(kg) | Load capacities <sup>3)</sup> (N) |                | Load moments <sup>3)</sup> (Nm) |                 |                |                 |
|------|-----------------|--------------------------------|----------------|----------------|----------------|----------------|----|----------------|--------------|-----------------------------------|----------------|---------------------------------|-----------------|----------------|-----------------|
|      | N <sub>1</sub>  | N <sub>6</sub> <sup>±0.5</sup> | S <sub>1</sub> | S <sub>2</sub> | S <sub>5</sub> | S <sub>9</sub> | T  | V <sub>1</sub> |              | C                                 | C <sub>0</sub> | M <sub>t</sub>                  | M <sub>t0</sub> | M <sub>L</sub> | M <sub>L0</sub> |
| 20   | 7.7             | 13.2                           | 5.3            | M6             | 6.0            | M3x5           | 60 | 6.0            | 0.25         | 9 600                             | 13 600         | 120                             | 170             | 40             | 58              |
| 25   | 9.3             | 15.2                           | 6.7            | M8             | 7.0            | M3x5           | 60 | 7.5            | 0.45         | 19 800                            | 21 200         | 280                             | 300             | 130            | 140             |


1) Dimension H<sub>2</sub> with cover strip

2) Dimension H<sub>2</sub> without cover strip

3) Load capacities and load moments for ball runner block **without** ball chain.

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** by 1.26 according to the table.

SNN – Slimline, normal, low

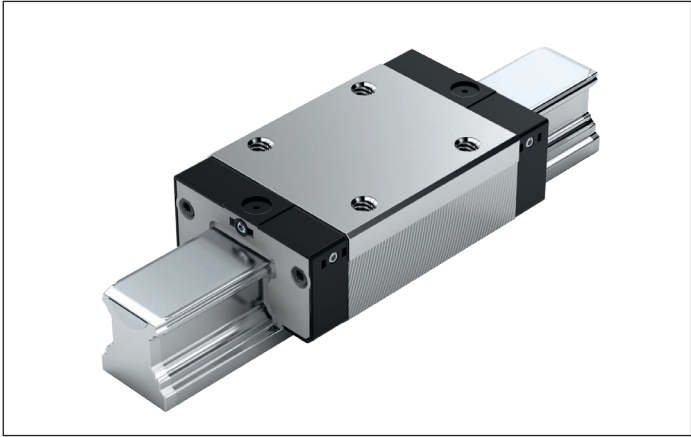

R1694 ... 1.

Dynamic characteristics

Travel speed:  $v_{\max} = 3 \text{ m/s}$   
Acceleration:  $a_{\max} = 250 \text{ m/s}^2$   
(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

Note on lubrication

► No initial lubrication

Note

Can be used on all SNS/SNO ball guide rails.

Options and material numbers

| Size             | Ball runner blocks with size | Preload class |    | Accuracy class |   | Seals on ball runner blocks without ball chain |    |
|------------------|------------------------------|---------------|----|----------------|---|------------------------------------------------|----|
|                  |                              | C0            | C1 | N              | H | SS                                             | LS |
| 20               | R1694 8                      | 9             | 1  | 4              | 3 | 10                                             | 11 |
| 25 <sup>1)</sup> | R1694 2                      | 9             | 1  | 4              | 3 | 10                                             | 11 |
| E.g.:            | R1694 8                      |               | 1  |                | 3 | 10                                             |    |

1) Ball runner block BSHP

Ordering example

Options:

- Ball runner block SNN
- Size 20
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1694 813 10

Preload classes


C0 = Without preload (clearance)  
C1 = Moderate preload

Seals

SS = Standard seal  
LS = Low-friction seal

Key

Gray numbers  
= No preferred variants/combinations (partially longer delivery times)

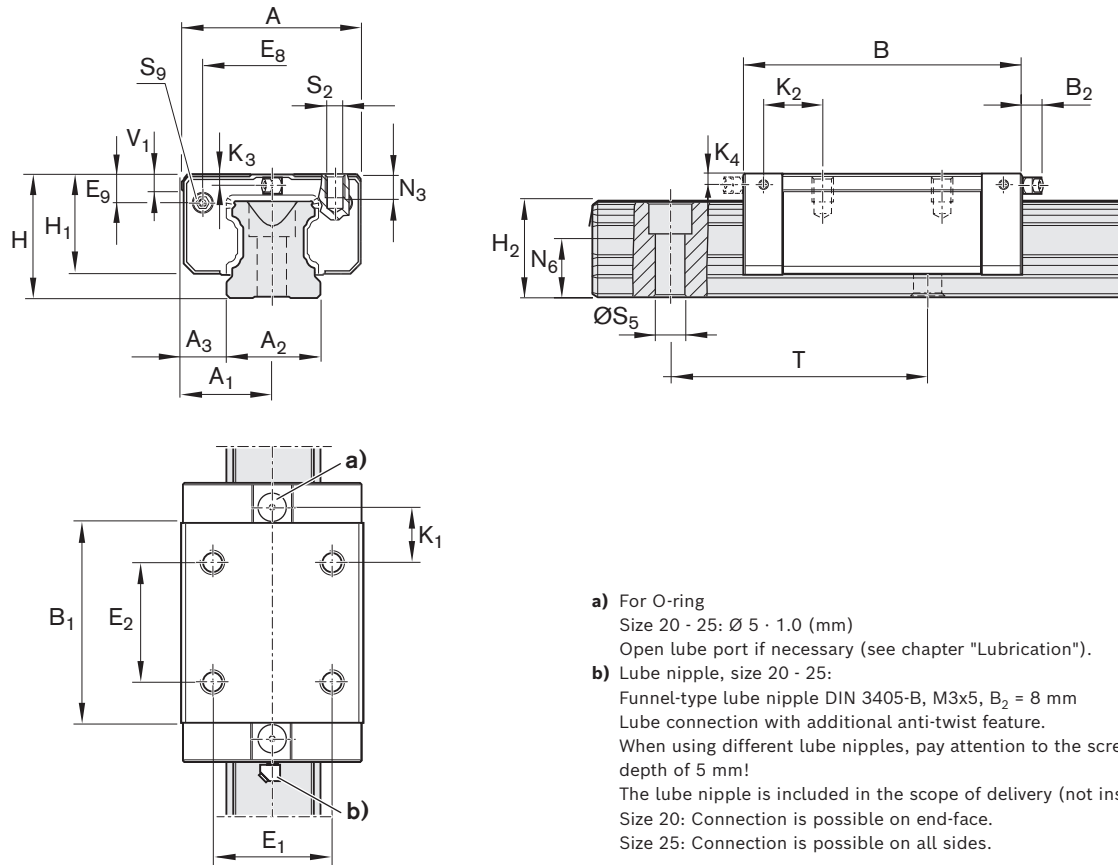

| Size | Dimensions (mm) |                |                |                |                   |                |                |                |                |                |    |                |                              |                              |                |                |                |                |
|------|-----------------|----------------|----------------|----------------|-------------------|----------------|----------------|----------------|----------------|----------------|----|----------------|------------------------------|------------------------------|----------------|----------------|----------------|----------------|
|      | A               | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | B <sup>+0.5</sup> | B <sub>1</sub> | E <sub>1</sub> | E <sub>2</sub> | E <sub>8</sub> | E <sub>9</sub> | H  | H <sub>1</sub> | H <sub>2</sub> <sup>1)</sup> | H <sub>2</sub> <sup>2)</sup> | K <sub>1</sub> | K <sub>2</sub> | K <sub>3</sub> | K <sub>4</sub> |
| 20   | 42              | 21             | 20             | 11.0           | 72.5              | 49.6           | 32             | 32             | 30.5           | 5.6            | 28 | 23.0           | 20.75                        | 20.55                        | 13.0           | –              | 3.6            | –              |
| 25   | 48              | 24             | 23             | 12.5           | 81.0              | 57.8           | 35             | 35             | 38.3           | 8.5            | 33 | 26.5           | 24.45                        | 24.25                        | 16.6           | 17.0           | 4.1            | 4.1            |

| Size | Dimensions (mm) |                                |                |                |                |    |                |      | Mass<br>(kg) | Load capacities <sup>3)</sup><br>(N) |                | Load moments <sup>3)</sup> (Nm) |                 |                |                 |
|------|-----------------|--------------------------------|----------------|----------------|----------------|----|----------------|------|--------------|--------------------------------------|----------------|---------------------------------|-----------------|----------------|-----------------|
|      | N <sub>3</sub>  | N <sub>6</sub> <sup>±0.5</sup> | S <sub>2</sub> | S <sub>5</sub> | S <sub>9</sub> | T  | V <sub>1</sub> | m    |              | C                                    | C <sub>0</sub> | M <sub>t</sub>                  | M <sub>t0</sub> | M <sub>L</sub> | M <sub>L0</sub> |
| 20   | 6.3             | 13.2                           | M5             | 6.0            | M3x5           | 60 | 6.0            | 0.30 | 14 500       | 24 400                               | 190            | 310                             | 100             | 165            |                 |
| 25   | 7.0             | 15.2                           | M6             | 7.0            | M3x5           | 60 | 7.5            | 0.45 | 28 600       | 35 900                               | 410            | 510                             | 290             | 360            |                 |


1) Dimension H<sub>2</sub> with cover strip

2) Dimension H<sub>2</sub> without cover strip

3) Load capacities and load moments for ball runner block **without** ball chain.

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** by 1.26 according to the table.

SKN – Slimline, short, low

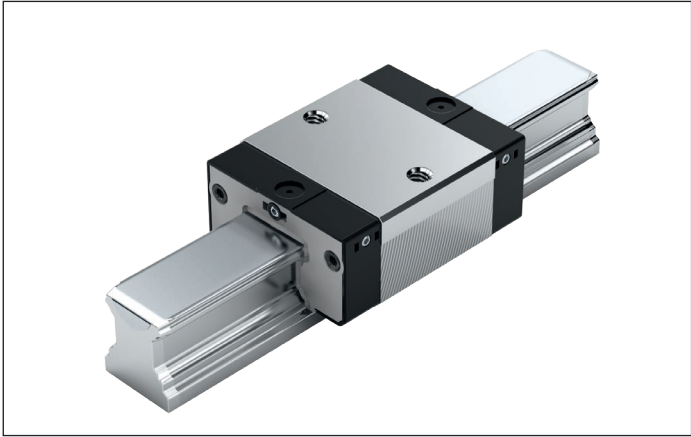

R1664 ... 1.

Dynamic characteristics

Travel speed:  $v_{\max} = 3 \text{ m/s}$   
Acceleration:  $a_{\max} = 250 \text{ m/s}^2$   
(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

Note on lubrication

► No initial lubrication

Note

Can be used on all SNS/SNO ball guide rails.

Options and material numbers

| Size             | Ball runner blocks with size | Preload class |    | Accuracy class |   | Seals on ball runner blocks without ball chain |    |
|------------------|------------------------------|---------------|----|----------------|---|------------------------------------------------|----|
|                  |                              | C0            | C1 | N              | H | SS                                             | LS |
| 20               | R1664 8                      | 9             | 1  | 4              | 3 | 10                                             | 11 |
| 25 <sup>1)</sup> | R1664 2                      | 9             | 1  | 4              | 3 | 10                                             | 11 |
| E.g.:            | R1664 8                      |               | 1  |                | 3 | 10                                             |    |

1) Ball runner block BSHP

Ordering example

Options:

- Ball runner block SKN
- Size 20
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1664 813 10

Preload classes


C0 = Without preload (clearance)  
C1 = Moderate preload

Seals

SS = Standard seal  
LS = Low-friction seal

Key

Gray numbers  
= No preferred variants/combinations (partially longer delivery times)

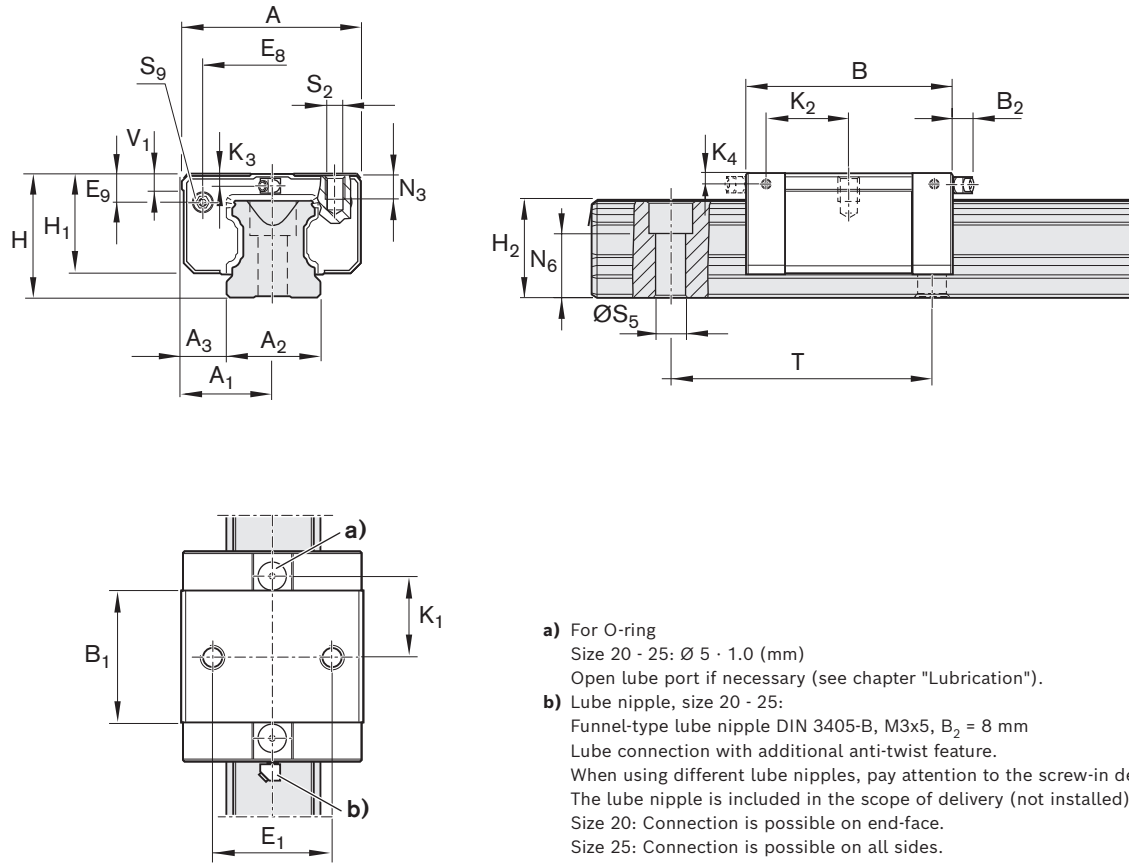

| Size | Dimensions (mm) |                |                |                |                   |                |                |                |                |    |                |                              |                              |                |                |                |                |
|------|-----------------|----------------|----------------|----------------|-------------------|----------------|----------------|----------------|----------------|----|----------------|------------------------------|------------------------------|----------------|----------------|----------------|----------------|
|      | A               | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | B <sup>+0.5</sup> | B <sub>1</sub> | E <sub>1</sub> | E <sub>8</sub> | E <sub>9</sub> | H  | H <sub>1</sub> | H <sub>2</sub> <sup>1)</sup> | H <sub>2</sub> <sup>2)</sup> | K <sub>1</sub> | K <sub>2</sub> | K <sub>3</sub> | K <sub>4</sub> |
| 20   | 42              | 21             | 20             | 11.0           | 55                | 31.9           | 32             | 30.5           | 5.6            | 28 | 23.0           | 20.75                        | 20.55                        | 20.1           | –              | 3.6            | –              |
| 25   | 48              | 24             | 23             | 12.5           | 62                | 38.6           | 35             | 38.3           | 8.5            | 33 | 26.5           | 24.45                        | 24.25                        | 24.5           | 25.0           | 4.1            | 4.1            |

| Size | Dimensions (mm) |                                |                |                |                |    |                | Mass (kg) | Load capacities <sup>3)</sup> (N) |                | Load moments <sup>3)</sup> (Nm) |                 |                |                 |
|------|-----------------|--------------------------------|----------------|----------------|----------------|----|----------------|-----------|-----------------------------------|----------------|---------------------------------|-----------------|----------------|-----------------|
|      | N <sub>3</sub>  | N <sub>6</sub> <sup>±0.5</sup> | S <sub>2</sub> | S <sub>5</sub> | S <sub>9</sub> | T  | V <sub>1</sub> |           | C                                 | C <sub>0</sub> | M <sub>t</sub>                  | M <sub>t0</sub> | M <sub>L</sub> | M <sub>L0</sub> |
| 20   | 6.3             | 13.2                           | M5             | 6.0            | M3x5           | 60 | 6.0            | 0.20      | 9 600                             | 13 600         | 120                             | 170             | 40             | 58              |
| 25   | 7.0             | 15.2                           | M6             | 7.0            | M3x5           | 60 | 7.5            | 0.30      | 19 800                            | 21 200         | 280                             | 300             | 130            | 140             |


1) Dimension H<sub>2</sub> with cover strip

2) Dimension H<sub>2</sub> without cover strip

3) Load capacities and load moments for ball runner block **without** ball chain.

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** by 1.26 according to the table.

## FNS – Flange, normal, standard height

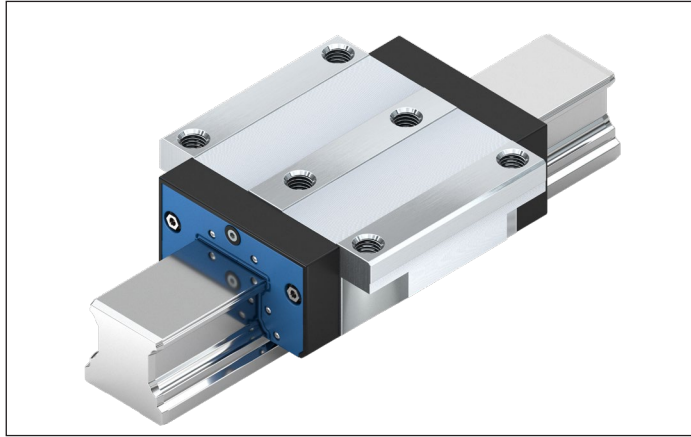**R1651 ... 1.****Dynamic characteristics**

Travel speed:  $v_{\max} = 5 \text{ m/s}$  size 55  
 $3 \text{ m/s}$  size 65

Acceleration:  $a_{\max} = 250 \text{ m/s}^2$   
 (If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

**Note on lubrication**

► No initial lubrication

**Note**

Can be used on all SNS ball guide rails.

**Options and material numbers**

| Size         | Ball runner blocks with size | Preload class |    |    |    | Accuracy class |   |   |    |    | Seals on ball runner blocks without ball chain |
|--------------|------------------------------|---------------|----|----|----|----------------|---|---|----|----|------------------------------------------------|
|              |                              | C0            | C1 | C2 | C3 | N              | H | P | SP | UP |                                                |
| <b>55</b>    | R1651 5                      | 9             |    |    |    | 4              | 3 | – | –  | –  | 10                                             |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 1  | 9  | 10                                             |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 1  | 9  | 10                                             |
|              |                              |               |    |    | 3  | –              | – | 2 | 1  | 9  | 10                                             |
| <b>65</b>    | R1651 6                      | 9             |    |    |    | 4              | 3 | – | –  | –  | 10                                             |
|              |                              |               | 1  |    |    | 4              | 3 | 2 | 1  | 9  | 10                                             |
|              |                              |               |    | 2  |    | –              | 3 | 2 | 1  | 9  | 10                                             |
|              |                              |               |    |    | 3  | –              | – | 2 | 1  | 9  | 10                                             |
| <b>E.g.:</b> | R1651 5                      |               | 1  |    |    |                | 3 |   |    |    | 10                                             |

**Ordering example**

Options:

- Ball runner block FNS
- Size 55
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:


R1651 513 10

**Preload classes**

C0 = Without preload (clearance)  
 C1 = Moderate preload  
 C2 = Average preload  
 C3 = High preload

**Seals**

SS = Standard seal

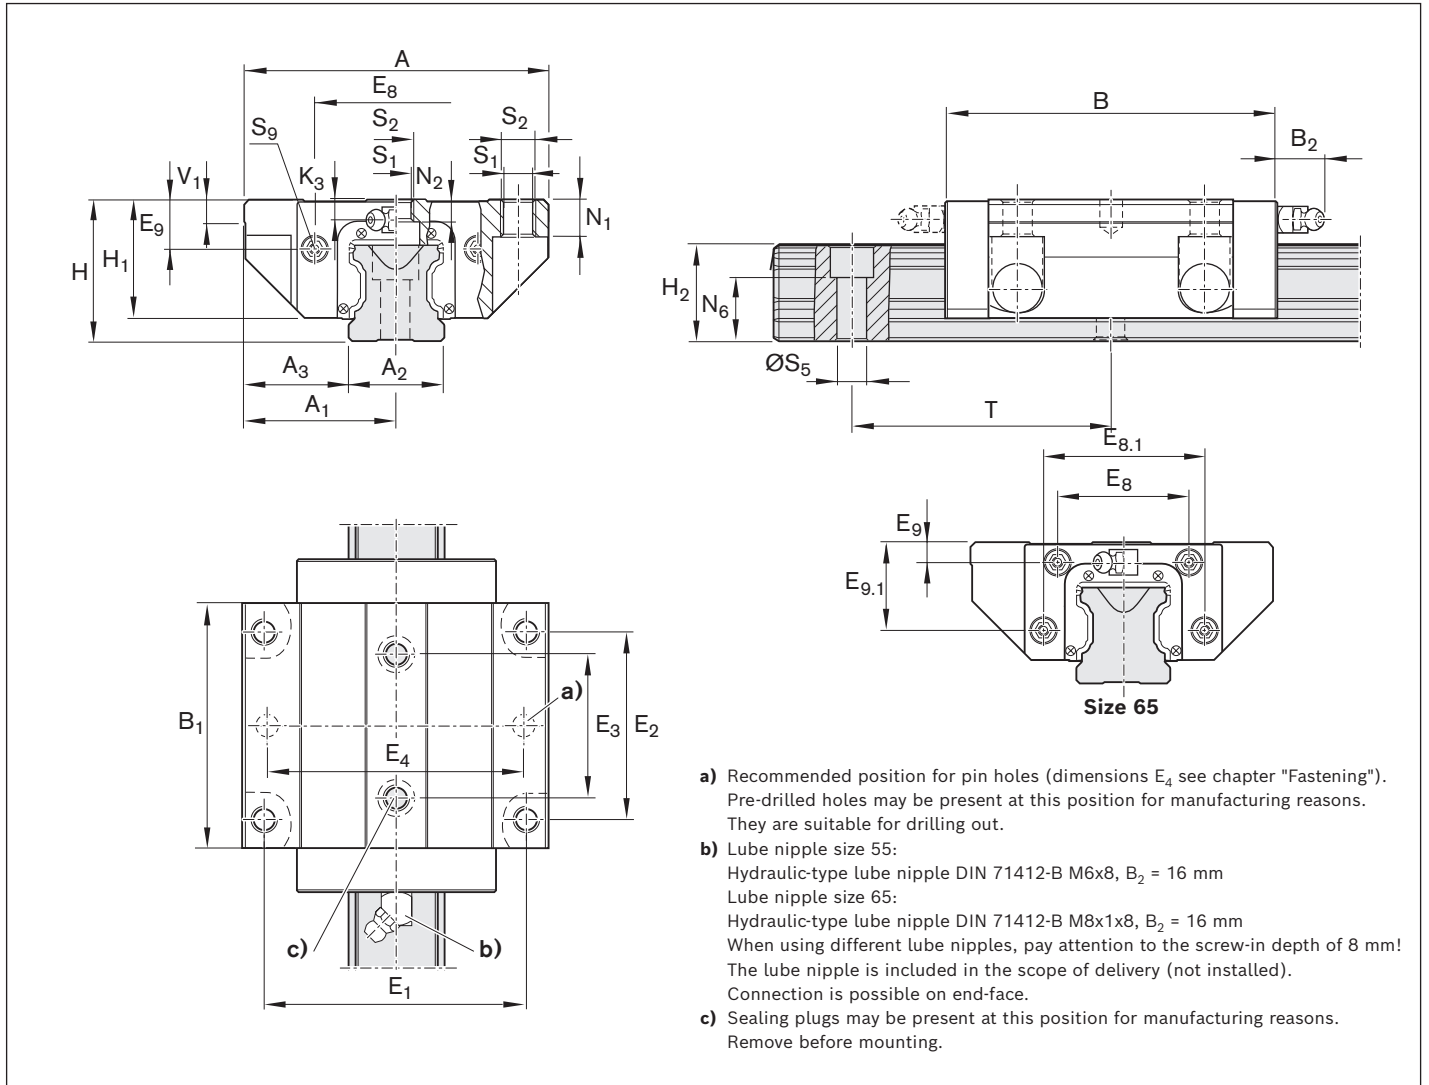

| Size | Dimensions (mm) |                |                |                |                   |                |                |                |                |                |                  |                |                  |    |                |                              |                              |
|------|-----------------|----------------|----------------|----------------|-------------------|----------------|----------------|----------------|----------------|----------------|------------------|----------------|------------------|----|----------------|------------------------------|------------------------------|
|      | A               | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | B <sup>+0.5</sup> | B <sub>1</sub> | E <sub>1</sub> | E <sub>2</sub> | E <sub>3</sub> | E <sub>8</sub> | E <sub>8.1</sub> | E <sub>9</sub> | E <sub>9.1</sub> | H  | H <sub>1</sub> | H <sub>2</sub> <sup>1)</sup> | H <sub>2</sub> <sup>2)</sup> |
| 55   | 140             | 70             | 53             | 43.5           | 159               | 115.5          | 116            | 95             | 70             | 80             | –                | 22.3           | –                | 70 | 57             | 48.15                        | 47.85                        |
| 65   | 170             | 85             | 63             | 53.5           | 188               | 139.6          | 142            | 110            | 82             | 76             | 100              | 11.0           | 53.5             | 90 | 76             | 60.15                        | 59.85                        |

| Size | Dimensions (mm) |                |                |                                |                |                |                |                |     |                |  | Mass (kg) | Load capacities <sup>3)</sup> (N) |                | Load moments <sup>3)</sup> (Nm) |                 |                |                 |
|------|-----------------|----------------|----------------|--------------------------------|----------------|----------------|----------------|----------------|-----|----------------|--|-----------|-----------------------------------|----------------|---------------------------------|-----------------|----------------|-----------------|
|      | K <sub>3</sub>  | N <sub>1</sub> | N <sub>2</sub> | N <sub>6</sub> <sup>±0.5</sup> | S <sub>1</sub> | S <sub>2</sub> | S <sub>5</sub> | S <sub>9</sub> | T   | V <sub>1</sub> |  | m         | C                                 | C <sub>0</sub> | M <sub>t</sub>                  | M <sub>t0</sub> | M <sub>L</sub> | M <sub>L0</sub> |
| 55   | 9               | 18             | 13.5           | 29.0                           | 12.4           | M14            | 16             | M5x8           | 120 | 12             |  | 5.20      | 109 000                           | 174 000        | 3 480                           | 5 550           | 2 320          | 3 690           |
| 65   | 16              | 23             | 14.0           | 38.5                           | 14.6           | M16            | 18             | M4x7           | 150 | 15             |  | 10.25     | 172 000                           | 280 000        | 6 810                           | 11 100          | 4 560          | 7 400           |


1) Dimension  $H_2$  with cover strip.

2) Dimension  $H_2$  without cover strip.

3) Load capacities and load moments for ball runner block **without** ball chain.

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** by 1.26 according to the table.

FLS – Flange, long, standard height

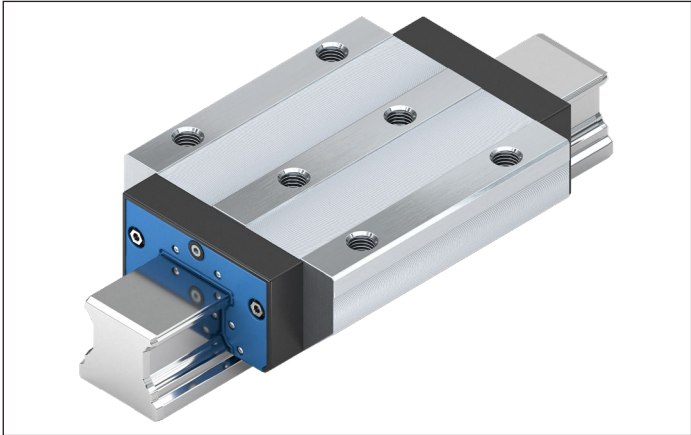

R1653 ... 1.

Dynamic characteristics

Travel speed:  $v_{\max} = 5 \text{ m/s}$  size 55  
3 m/s size 65  
Acceleration:  $a_{\max} = 250 \text{ m/s}^2$   
(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

Note on lubrication

► No initial lubrication

Note

Can be used on all SNS ball guide rails.

Options and material numbers

| Size  | Ball runner blocks with size | Preload class |    |    |    | Accuracy class |   |   |    |    | Seals on ball runner blocks without ball chain | SS |
|-------|------------------------------|---------------|----|----|----|----------------|---|---|----|----|------------------------------------------------|----|
|       |                              | C0            | C1 | C2 | C3 | N              | H | P | SP | UP |                                                |    |
| 55    | R1653 5                      | 9             |    |    |    | 4              | 3 | – | –  | –  |                                                | 10 |
|       |                              |               | 1  |    |    | 4              | 3 | 2 | 1  | 9  |                                                | 10 |
|       |                              |               |    | 2  |    | –              | 3 | 2 | 1  | 9  |                                                | 10 |
|       |                              |               |    |    | 3  | –              | – | 2 | 1  | 9  |                                                | 10 |
| 65    | R1653 6                      | 9             |    |    |    | 4              | 3 | – | –  | –  |                                                | 10 |
|       |                              |               | 1  |    |    | 4              | 3 | 2 | 1  | 9  |                                                | 10 |
|       |                              |               |    | 2  |    | –              | 3 | 2 | 1  | 9  |                                                | 10 |
|       |                              |               |    |    | 3  | –              | – | 2 | 1  | 9  |                                                | 10 |
| E.g.: | R1653 5                      |               | 1  |    |    |                | 3 |   |    |    |                                                | 10 |

Ordering example

Options:

- Ball runner block FLS
- Size 55
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1653 513 10


Preload classes

C0 = Without preload (clearance)  
C1 = Moderate preload  
C2 = Average preload  
C3 = High preload

Seals

SS = Standard seal



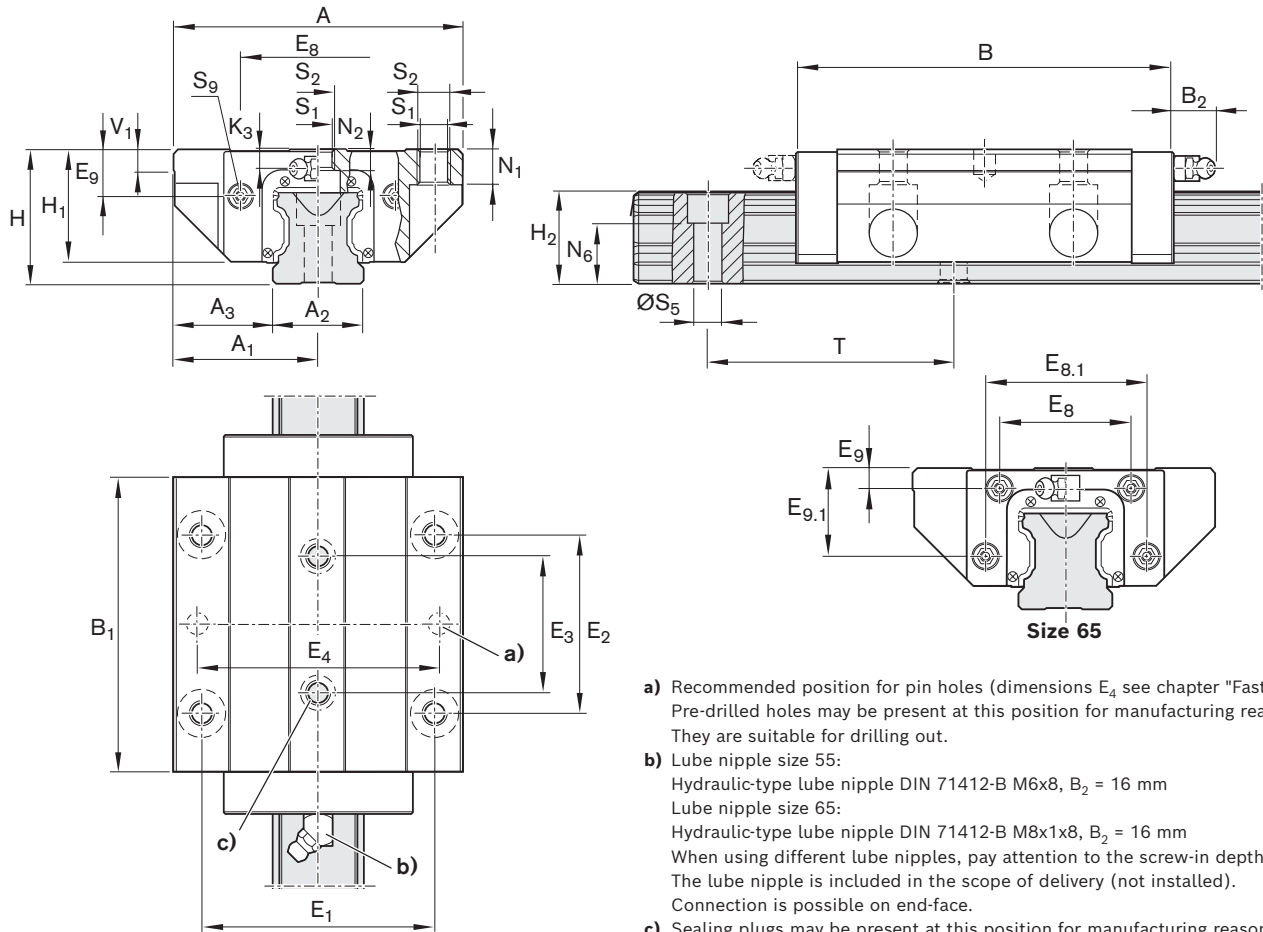

- a) Recommended position for pin holes (dimensions  $E_4$  see chapter "Fastening"). Pre-drilled holes may be present at this position for manufacturing reasons. They are suitable for drilling out.
- b) Lube nipple size 55:  
Hydraulic-type lube nipple DIN 71412-B M6x8,  $B_2 = 16$  mm  
Lube nipple size 65:  
Hydraulic-type lube nipple DIN 71412-B M8x1x8,  $B_2 = 16$  mm  
When using different lube nipples, pay attention to the screw-in depth of 8 mm! The lube nipple is included in the scope of delivery (not installed). Connection is possible on end-face.
- c) Sealing plugs may be present at this position for manufacturing reasons. Remove before mounting.

| Size | Dimensions (mm) |                |                |                |                   |                |                |                |                |                |                  |                |                  |    |                |                              |                              |
|------|-----------------|----------------|----------------|----------------|-------------------|----------------|----------------|----------------|----------------|----------------|------------------|----------------|------------------|----|----------------|------------------------------|------------------------------|
|      | A               | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | B <sup>+0.5</sup> | B <sub>1</sub> | E <sub>1</sub> | E <sub>2</sub> | E <sub>3</sub> | E <sub>8</sub> | E <sub>8.1</sub> | E <sub>9</sub> | E <sub>9.1</sub> | H  | H <sub>1</sub> | H <sub>2</sub> <sup>1)</sup> | H <sub>2</sub> <sup>2)</sup> |
| 55   | 140             | 70             | 53             | 43.5           | 199               | 155.5          | 116            | 95             | 70             | 80             | –                | 22.3           | –                | 70 | 57             | 48.15                        | 47.85                        |
| 65   | 170             | 85             | 63             | 53.5           | 243               | 194.6          | 142            | 110            | 82             | 76             | 100              | 11.0           | 53.5             | 90 | 76             | 60.15                        | 59.85                        |

| Size | Dimensions (mm) |                |                |                                |                |                |                |                |     |                |       | Mass<br>(kg) | Load capacities <sup>3)</sup> (N) |                | Load moments <sup>3)</sup> (Nm) |                 |                |                 |
|------|-----------------|----------------|----------------|--------------------------------|----------------|----------------|----------------|----------------|-----|----------------|-------|--------------|-----------------------------------|----------------|---------------------------------|-----------------|----------------|-----------------|
|      | K <sub>3</sub>  | N <sub>1</sub> | N <sub>2</sub> | N <sub>6</sub> <sup>±0.5</sup> | S <sub>1</sub> | S <sub>2</sub> | S <sub>5</sub> | S <sub>9</sub> | T   | V <sub>1</sub> | m     |              | C                                 | C <sub>0</sub> | M <sub>t</sub>                  | M <sub>t0</sub> | M <sub>L</sub> | M <sub>L0</sub> |
| 55   | 9               | 18             | 13.5           | 29.0                           | 12.4           | M14            | 16             | M5x8           | 120 | 12             | 7.50  | 139 000      | 245 000                           | 4 410          | 7 780                           | 3 960           | 6 990          |                 |
| 65   | 16              | 23             | 14.0           | 38.5                           | 14.6           | M16            | 18             | M4x7           | 150 | 15             | 14.15 | 223 000      | 404 000                           | 8 810          | 16 000                          | 8 160           | 14 800         |                 |


1) Dimension  $H_2$  with cover strip

2) Dimension  $H_2$  without cover strip

3) Load capacities and load moments for ball runner block **without** ball chain.

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** by 1.26 according to the table.

SNS – Slimline, normal, standard height

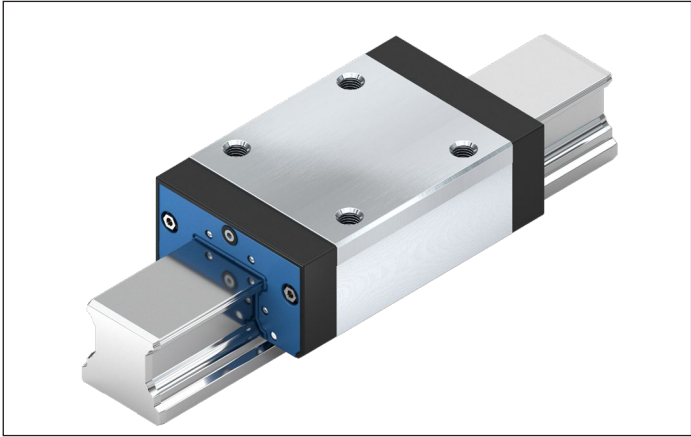

R1622 ...1.

Dynamic characteristics

Travel speed:  $v_{\max} = 5 \text{ m/s}$  size 55  
3 m/s size 65  
Acceleration:  $a_{\max} = 250 \text{ m/s}^2$   
(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

Note on lubrication

► No initial lubrication

Note

Can be used on all SNS ball guide rails.

Options and material numbers

| Size  | Ball runner blocks with size | Preload class |    |    |    | Accuracy class |   |   | Seals on ball runner blocks without ball chain |    |
|-------|------------------------------|---------------|----|----|----|----------------|---|---|------------------------------------------------|----|
|       |                              | C0            | C1 | C2 | C3 | N              | H | P | SS                                             |    |
| 55    | R1622 5                      | 9             |    |    |    | 4              | 3 | – |                                                | 10 |
|       |                              |               | 1  |    |    | 4              | 3 | 2 |                                                | 10 |
|       |                              |               |    | 2  |    | –              | 3 | 2 |                                                | 10 |
|       |                              |               |    |    | 3  | –              | – | 2 |                                                | 10 |
| 65    | R1622 6                      | 9             |    |    |    | 4              | 3 | – |                                                | 10 |
|       |                              |               | 1  |    |    | 4              | 3 | 2 |                                                | 10 |
|       |                              |               |    | 2  |    | –              | 3 | 2 |                                                | 10 |
|       |                              |               |    |    | 3  | –              | – | 2 |                                                | 10 |
| E.g.: | R1622 5                      |               | 1  |    |    |                | 3 |   |                                                | 10 |

Ordering example

Options:

- Ball runner block SNS
- Size 55
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:


R1622 513 10

Preload classes

C0 = Without preload (clearance)  
C1 = Moderate preload  
C2 = Average preload  
C3 = High preload

Seals

SS = Standard seal

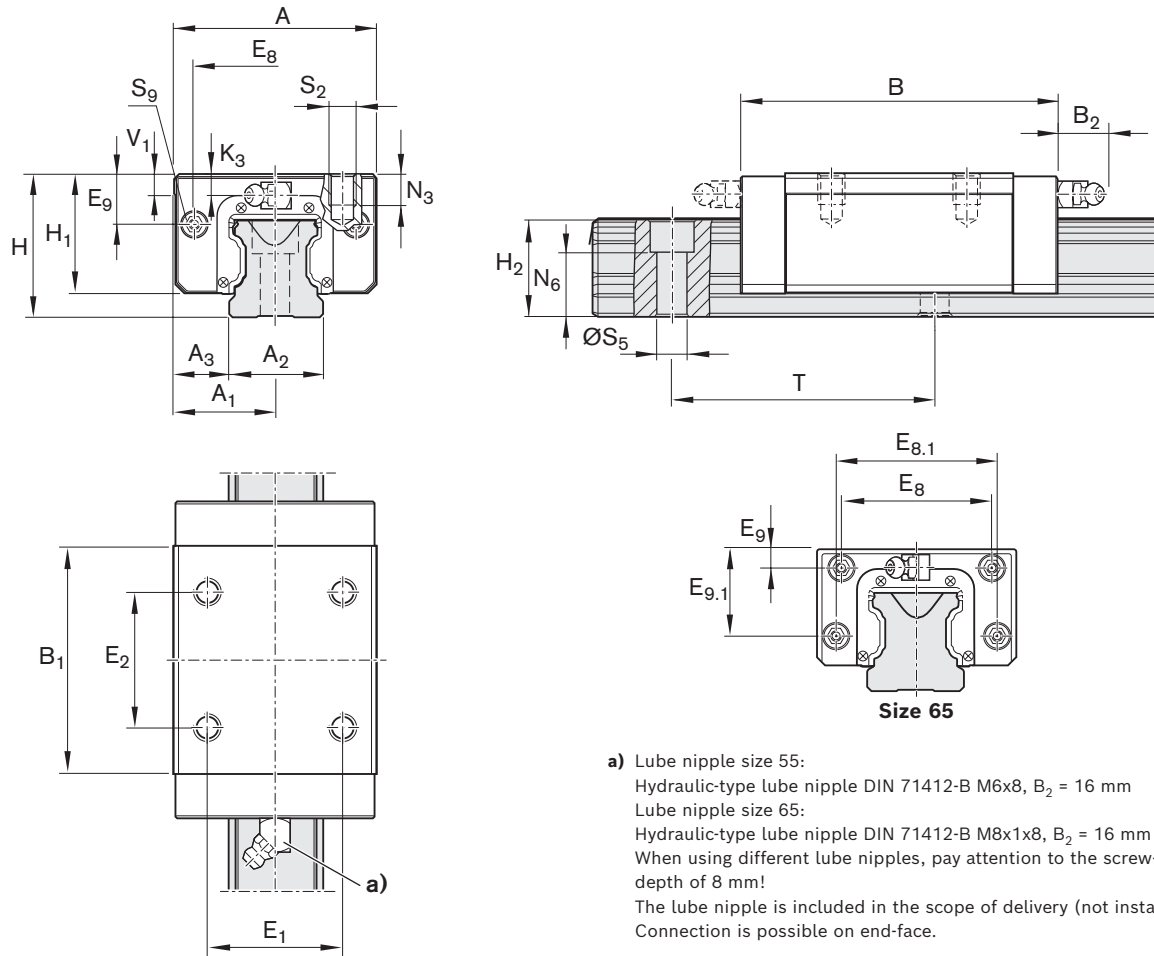

| Size | Dimensions (mm) |                |                |                |                   |                |                |                |                |                  |                |                  |    |                |                              |                              |
|------|-----------------|----------------|----------------|----------------|-------------------|----------------|----------------|----------------|----------------|------------------|----------------|------------------|----|----------------|------------------------------|------------------------------|
|      | A               | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | B <sup>+0.5</sup> | B <sub>1</sub> | E <sub>1</sub> | E <sub>2</sub> | E <sub>8</sub> | E <sub>8.1</sub> | E <sub>9</sub> | E <sub>9.1</sub> | H  | H <sub>1</sub> | H <sub>2</sub> <sup>1)</sup> | H <sub>2</sub> <sup>2)</sup> |
| 55   | 100             | 50             | 53             | 23.5           | 159               | 115.5          | 75             | 75             | 80             | —                | 22.3           | —                | 70 | 57             | 48.15                        | 47.85                        |
| 65   | 126             | 63             | 63             | 31.5           | 188               | 139.6          | 76             | 70             | 76             | 100              | 11.0           | 53.5             | 90 | 76             | 60.15                        | 59.85                        |

| Size | Dimensions (mm) |                |                                |                |                |                |     |                | Mass (kg) | Load capacities <sup>3)</sup> (N) |         | Load moments <sup>3)</sup> (Nm) |                                                                                       |       |                 |                                                                                       |  |
|------|-----------------|----------------|--------------------------------|----------------|----------------|----------------|-----|----------------|-----------|-----------------------------------|---------|---------------------------------|---------------------------------------------------------------------------------------|-------|-----------------|---------------------------------------------------------------------------------------|--|
|      | K <sub>3</sub>  | N <sub>3</sub> | N <sub>6</sub> <sup>±0.5</sup> | S <sub>2</sub> | S <sub>5</sub> | S <sub>9</sub> | T   | V <sub>1</sub> |           | m                                 | C       | C <sub>0</sub>                  |  |       | M <sub>t0</sub> |  |  |
| 55   | 9               | 19             | 29.0                           | M12            | 16             | M5x8           | 120 | 12             | 3.80      | 109 000                           | 174 000 | 3 480                           | 5 550                                                                                 | 2 320 | 3 690           |                                                                                       |  |
| 65   | 16              | 21             | 38.5                           | M16            | 18             | M4x7           | 150 | 15             | 6.90      | 172 000                           | 280 000 | 6 810                           | 11 100                                                                                | 4 560 | 7 400           |                                                                                       |  |


1) Dimension H<sub>2</sub> with cover strip

2) Dimension H<sub>2</sub> without cover strip

3) Load capacities and load moments for ball runner block **without** ball chain.

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** by 1.26 according to the table.

SLS – Slimline, long, standard height

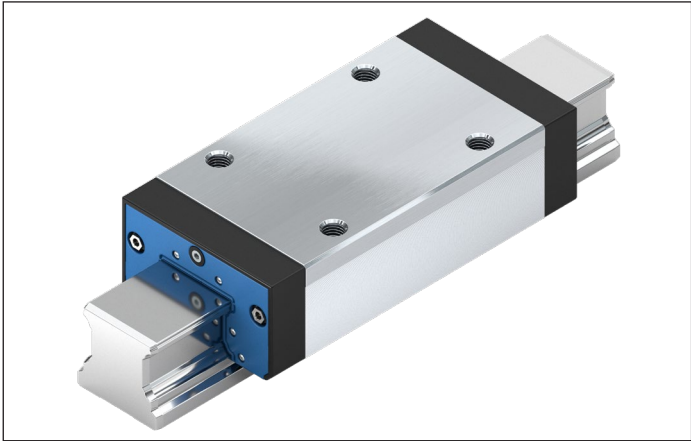

R1621 ... 1.

Dynamic characteristics

Travel speed:  $v_{max} = 5 \text{ m/s}$  size 55  
3 m/s size 65

Acceleration:  $a_{max} = 250 \text{ m/s}^2$   
(If  $F_{comb} > 2.8 \cdot F_{pr}$ :  $a_{max} = 50 \text{ m/s}^2$ )

Note on lubrication

► No initial lubrication

Note

Can be used on all SNS ball guide rails.

Options and material numbers

| Size  | Ball runner blocks with size | Preload class |    |    |    | Accuracy class |   |   | Seals on ball runner blocks without ball chain | SS |
|-------|------------------------------|---------------|----|----|----|----------------|---|---|------------------------------------------------|----|
|       |                              | C0            | C1 | C2 | C3 | N              | H | P |                                                |    |
| 55    | R1623 5                      | 9             |    |    |    | 4              | 3 | – |                                                | 10 |
|       |                              |               | 1  |    |    | 4              | 3 | 2 |                                                | 10 |
|       |                              |               |    | 2  |    | –              | 3 | 2 |                                                | 10 |
|       |                              |               |    |    | 3  | –              | – | 2 |                                                | 10 |
| 65    | R1623 6                      | 9             |    |    |    | 4              | 3 | – |                                                | 10 |
|       |                              |               | 1  |    |    | 4              | 3 | 2 |                                                | 10 |
|       |                              |               |    | 2  |    | –              | 3 | 2 |                                                | 10 |
|       |                              |               |    |    | 3  | –              | – | 2 |                                                | 10 |
| E.g.: | R1623 5                      |               | 1  |    |    |                | 3 |   |                                                | 10 |

Ordering example

Options:

- Ball runner block SLS
- Size 55
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:


R1623 513 10

Preload classes

C0 = Without preload (clearance)  
C1 = Moderate preload  
C2 = Average preload  
C3 = High preload

Seals

SS = Standard seal

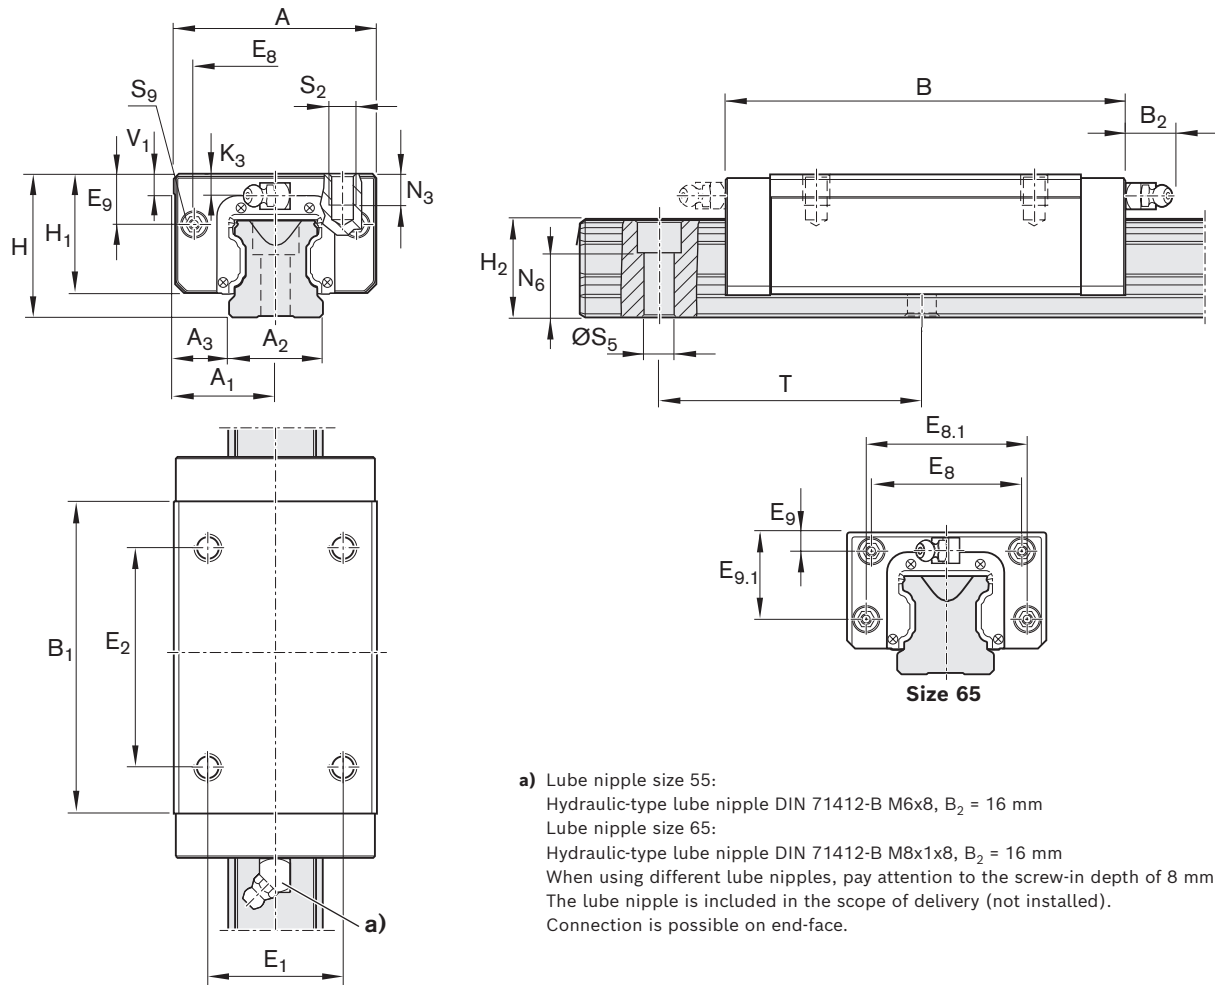

| Size | Dimensions (mm) |                |                |                |                   |                |                |                |                |                  |                |                  |    |                |                              |                              |
|------|-----------------|----------------|----------------|----------------|-------------------|----------------|----------------|----------------|----------------|------------------|----------------|------------------|----|----------------|------------------------------|------------------------------|
|      | A               | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | B <sup>+0.5</sup> | B <sub>1</sub> | E <sub>1</sub> | E <sub>2</sub> | E <sub>8</sub> | E <sub>8.1</sub> | E <sub>9</sub> | E <sub>9.1</sub> | H  | H <sub>1</sub> | H <sub>2</sub> <sup>1)</sup> | H <sub>2</sub> <sup>2)</sup> |
| 55   | 100             | 50             | 53             | 23.5           | 199               | 155.5          | 75             | 95             | 80             | –                | 22.3           | –                | 70 | 57             | 48.15                        | 47.85                        |
| 65   | 126             | 63             | 63             | 31.5           | 243               | 194.6          | 76             | 120            | 76             | 100              | 11.0           | 53.5             | 90 | 76             | 60.15                        | 59.85                        |

| Size | Dimensions (mm) |                |                                |                |                |                |     |                | Mass<br>(kg) | Load capacities <sup>3)</sup> (N) |                | Load moments <sup>3)</sup> (Nm) |                 |                |                 |
|------|-----------------|----------------|--------------------------------|----------------|----------------|----------------|-----|----------------|--------------|-----------------------------------|----------------|---------------------------------|-----------------|----------------|-----------------|
|      | K <sub>3</sub>  | N <sub>3</sub> | N <sub>6</sub> <sup>±0.5</sup> | S <sub>2</sub> | S <sub>5</sub> | S <sub>9</sub> | T   | V <sub>1</sub> |              |                                   |                |                                 |                 |                |                 |
| 55   | 9               | 19             | 29.0                           | M12            | 16             | M5x8           | 120 | 12             | 4.8          | C                                 | C <sub>0</sub> | M <sub>t</sub>                  | M <sub>t0</sub> | M <sub>L</sub> | M <sub>L0</sub> |
| 65   | 16              | 21             | 38.5                           | M16            | 18             | M4x7           | 150 | 15             | 9.8          | 223 000                           | 404 000        | 8 810                           | 16 000          | 8 160          | 14 800          |


1) Dimension H<sub>2</sub> with cover strip

2) Dimension H<sub>2</sub> without cover strip

3) Load capacities and load moments for ball runner block **without** ball chain.

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** by 1.26 according to the table.

SNH – Slimline, normal, high

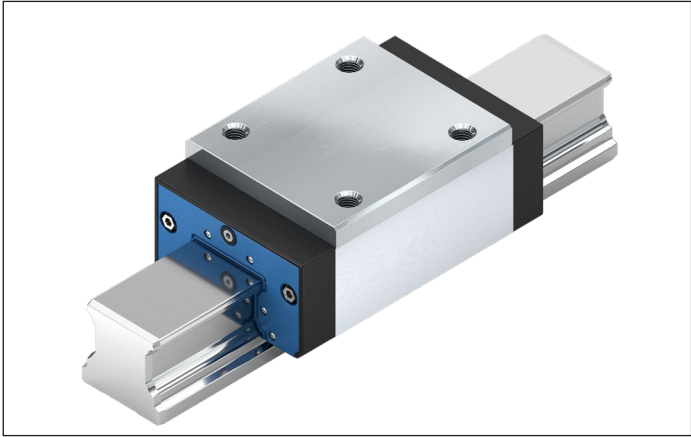

R1621 ... 1.

Dynamic characteristics

Travel speed:  $v_{\max} = 5 \text{ m/s}$   
Acceleration:  $a_{\max} = 250 \text{ m/s}^2$   
(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

Note on lubrication

▶ No initial lubrication

Note

Can be used on all SNS ball guide rails.

Options and material numbers

| Size  | Ball runner blocks with size | Preload class |    |    |    | Accuracy class |   |   | Seals on ball runner blocks without ball chain | SS |
|-------|------------------------------|---------------|----|----|----|----------------|---|---|------------------------------------------------|----|
|       |                              | C0            | C1 | C2 | C3 | N              | H | P |                                                |    |
| 55    | R1621 5                      | 9             |    |    |    | 4              | 3 | – |                                                | 10 |
|       |                              |               | 1  |    |    | 4              | 3 | 2 |                                                | 10 |
|       |                              |               |    | 2  |    | –              | 3 | 2 |                                                | 10 |
|       |                              |               |    |    | 3  | –              | – | 2 |                                                | 10 |
| E.g.: | R1621 5                      |               | 1  |    |    |                | 3 |   |                                                | 10 |

Ordering example

Options:

- ▶ Ball runner block SNH
- ▶ Size 55
- ▶ Preload class C1
- ▶ Accuracy class H
- ▶ With standard seal, without ball chain

Material number:


R1621 513 10

Preload classes

C0 = Without preload (clearance)  
C1 = Moderate preload  
C2 = Average preload  
C3 = High preload

Seals

SS = Standard seal

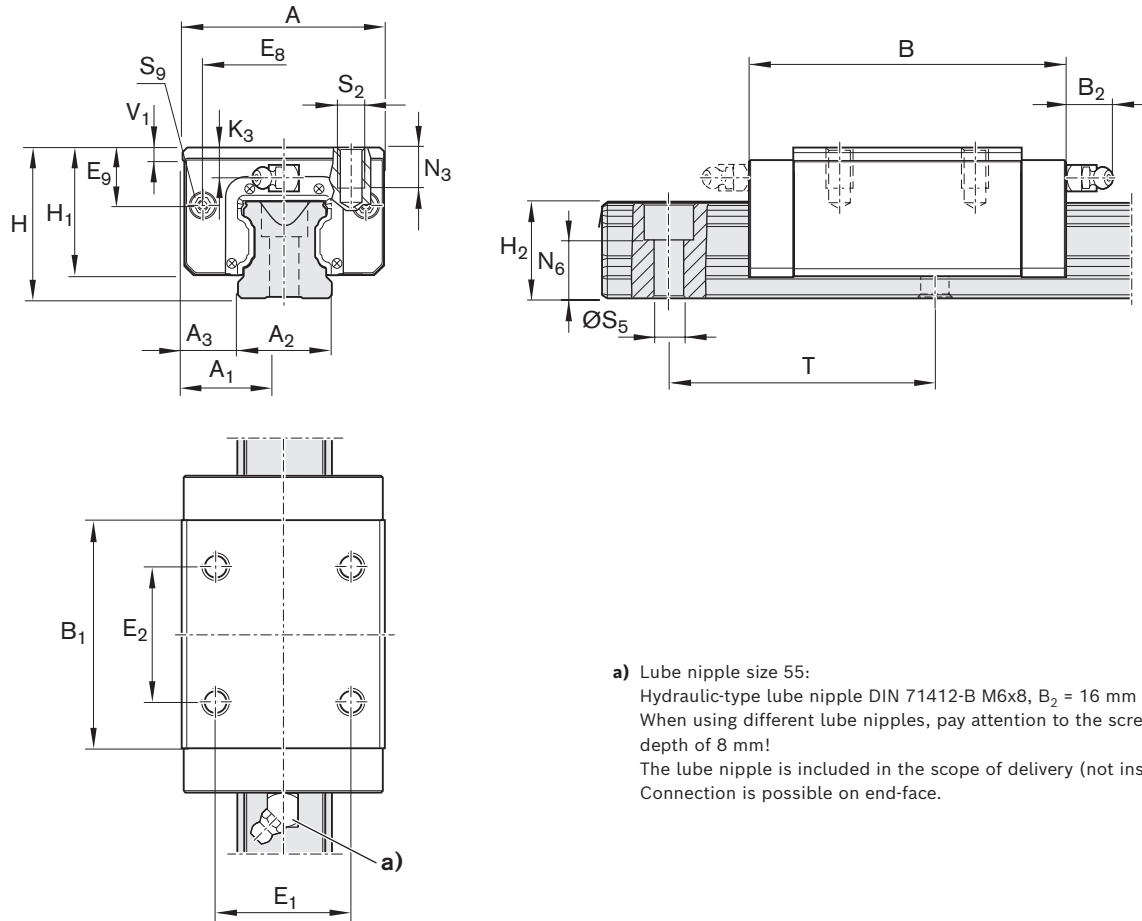

| Size | Dimensions (mm) |                |                |                |                   |                |                |                |                |                |    |                |                              |                              |
|------|-----------------|----------------|----------------|----------------|-------------------|----------------|----------------|----------------|----------------|----------------|----|----------------|------------------------------|------------------------------|
|      | A               | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | B <sup>+0.5</sup> | B <sub>1</sub> | E <sub>1</sub> | E <sub>2</sub> | E <sub>8</sub> | E <sub>9</sub> | H  | H <sub>1</sub> | H <sub>2</sub> <sup>1)</sup> | H <sub>2</sub> <sup>2)</sup> |
| 55   | 100             | 50             | 53             | 23.5           | 159               | 115.5          | 75             | 75             | 80             | 32.3           | 80 | 67             | 48.15                        | 47.85                        |

| Size | Dimensions (mm) |                |                                |                |                |                |     |                | Mass<br>(kg) | Load capacities <sup>3)</sup> (N) |                | Load moments <sup>3)</sup> (Nm) |                 |                |                 |
|------|-----------------|----------------|--------------------------------|----------------|----------------|----------------|-----|----------------|--------------|-----------------------------------|----------------|---------------------------------|-----------------|----------------|-----------------|
|      | K <sub>3</sub>  | N <sub>3</sub> | N <sub>6</sub> <sup>±0.5</sup> | S <sub>2</sub> | S <sub>5</sub> | S <sub>9</sub> | T   | V <sub>1</sub> |              | C                                 | C <sub>0</sub> | M <sub>t</sub>                  | M <sub>t0</sub> | M <sub>L</sub> | M <sub>L0</sub> |
| 55   | 19              | 19             | 29                             | M12            | 16             | M5x8           | 120 | 12             | 4.70         | 109 000                           | 174 000        | 3 480                           | 5 550           | 2 320          | 3 690           |


1) Dimension H<sub>2</sub> with cover strip

2) Dimension H<sub>2</sub> without cover strip

3) Load capacities and load moments for ball runner block **without** ball chain.

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** by 1.26 according to the table.

SLH – Slimline, long, high

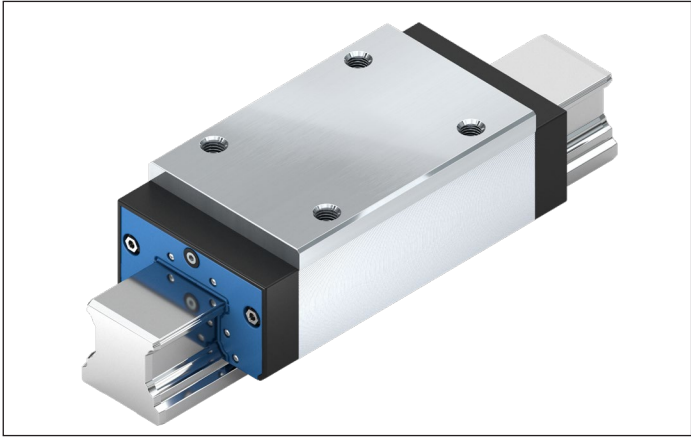

R1624 ... 1.

Dynamic characteristics

Travel speed:  $v_{\max} = 5 \text{ m/s}$   
Acceleration:  $a_{\max} = 250 \text{ m/s}^2$   
(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

Note on lubrication

► No initial lubrication

Note

Can be used on all SNS ball guide rails.

Options and material numbers

| Size  | Ball runner blocks with size | Preload class |    |    |    | Accuracy class |   |   | Seals on ball runner blocks without ball chain |
|-------|------------------------------|---------------|----|----|----|----------------|---|---|------------------------------------------------|
|       |                              | C0            | C1 | C2 | C3 | N              | H | P |                                                |
| 55    | R1624 5                      | 9             |    |    |    | 4              | 3 | – | 10                                             |
|       |                              |               | 1  |    |    | 4              | 3 | 2 | 10                                             |
|       |                              |               |    | 2  |    | –              | 3 | 2 | 10                                             |
|       |                              |               |    |    | 3  | –              | – | 2 | 10                                             |
| E.g.: | R1624 5                      |               | 1  |    |    |                | 3 |   | 10                                             |

Ordering example

Options:

- Ball runner block SLH
- Size 55
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1624 513 10


Preload classes

C0 = Without preload (clearance)  
C1 = Moderate preload  
C2 = Average preload  
C3 = High preload

Seals

SS = Standard seal



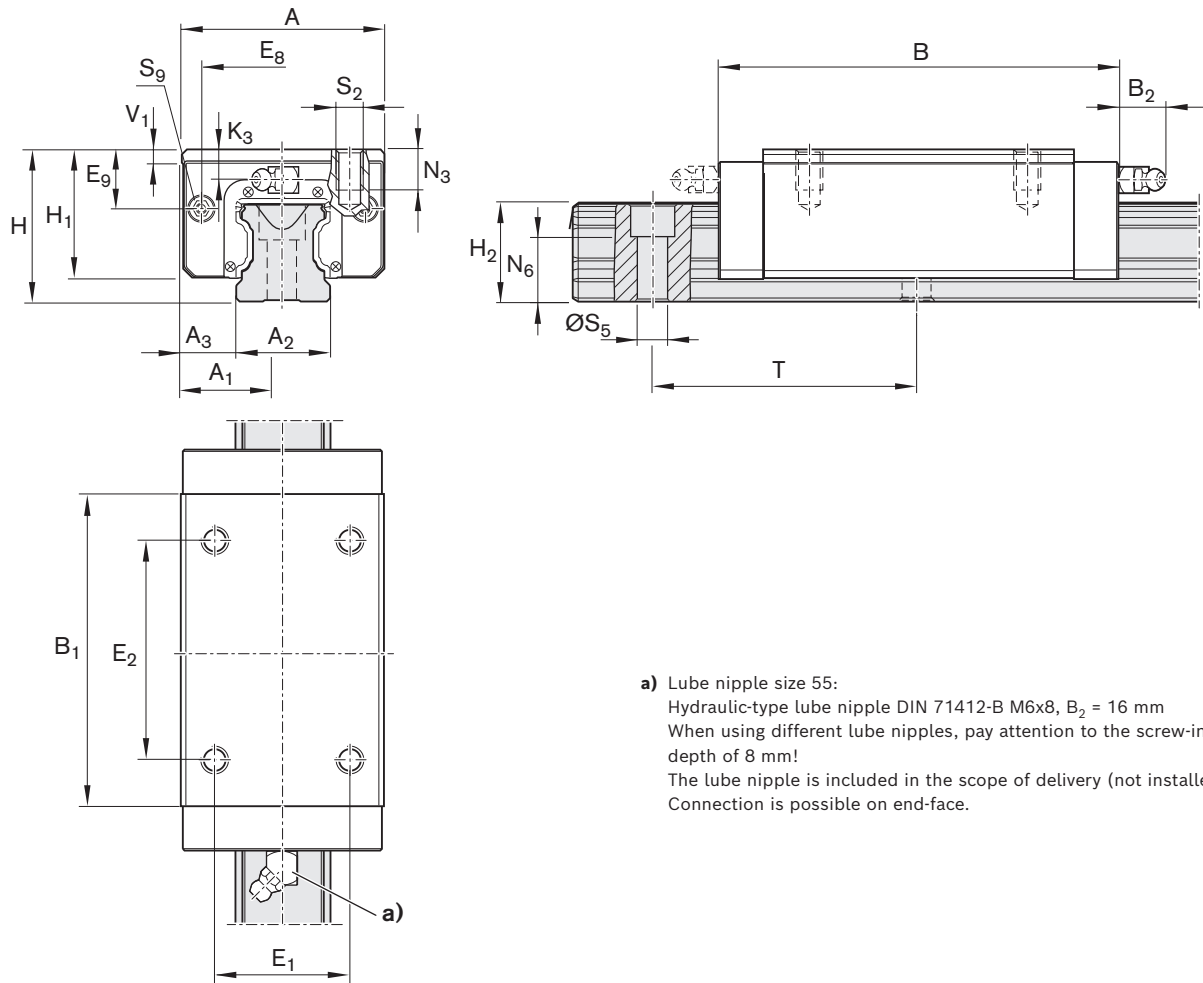

| Size | Dimensions (mm) |                |                |                |                   |                |                |                |                |                |    |                |                              |                              |
|------|-----------------|----------------|----------------|----------------|-------------------|----------------|----------------|----------------|----------------|----------------|----|----------------|------------------------------|------------------------------|
|      | A               | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | B <sup>+0.5</sup> | B <sub>1</sub> | E <sub>1</sub> | E <sub>2</sub> | E <sub>8</sub> | E <sub>9</sub> | H  | H <sub>1</sub> | H <sub>2</sub> <sup>1)</sup> | H <sub>2</sub> <sup>2)</sup> |
| 55   | 100             | 50             | 53             | 23.5           | 199               | 155.5          | 75             | 95             | 80             | 32.3           | 80 | 67             | 48.15                        | 47.85                        |

| Size | Dimensions (mm) |                |                                |                |                |                |     |                | Mass<br>(kg) | Load capacities <sup>3)</sup> (N)                                                    |                | Load moments <sup>3)</sup> (Nm)                                                       |                 |                                                                                       |                 |
|------|-----------------|----------------|--------------------------------|----------------|----------------|----------------|-----|----------------|--------------|--------------------------------------------------------------------------------------|----------------|---------------------------------------------------------------------------------------|-----------------|---------------------------------------------------------------------------------------|-----------------|
|      | K <sub>3</sub>  | N <sub>3</sub> | N <sub>6</sub> <sup>±0.5</sup> | S <sub>2</sub> | S <sub>5</sub> | S <sub>9</sub> | T   | V <sub>1</sub> |              |  | C <sub>0</sub> |  | M <sub>t0</sub> |  | M <sub>L0</sub> |
| 55   | 19              | 19             | 29                             | M12            | 16             | M5x8           | 120 | 12             | 6.00         | 139 000                                                                              | 245 000        | 4 410                                                                                 | 7 780           | 3 960                                                                                 | 6 990           |

1) Dimension  $H_2$  with cover strip

2) Dimension  $H_2$  without cover strip

3) Load capacities and load moments for ball runner block **without** ball chain.

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values  $C$ ,  $M_t$  and  $M_L$  by 1.26 according to the table.

Product description

Characteristic features

- ▶ Excellent dynamic characteristics:  
Travel speed  $v_{\max} = 10 \text{ m/s}$  (Size 15 - 45)  
 $v_{\max} = 7.5 \text{ m/s}$  (Size 55)  
 $v_{\max} = 5 \text{ m/s}$  (Size 65)
  - ▶ Acceleration  $a_{\max} = 500 \text{ m/s}^2$  (Size 15 - 45)  
 $a_{\max} = 250 \text{ m/s}^2$  (Size 55 - 65)
  - ▶ The same high load capacities in all four main directions of loading
  - ▶ Long-term lubrication is possible over several years
  - ▶ Minimum quantity lubrication system with integrated reservoir for oil lubrication (size 15 - 45)
  - ▶ All-round lube connections with metal thread (sizes 15 - 45)
  - ▶ Limitless interchangeability as all ball guide rail systems can be combined at will with all ball runner block versions within each accuracy class.
  - ▶ Maximum system rigidity due to preloaded O-arrangement
  - ▶ Electrically insulating due to use of ceramic balls for size 15 - 55
  - ▶ Existing range of accessories fully usable
  - ▶ Globally unique, premium logistics
- 1) Type-dependent



Ceramic balls (size 15 - 55)

- ▶ Enable maximum travel speeds

Further highlights:

- ▶ High speed due to the low weight of the ceramic balls or by pulse-reducing ball circulation at size 65
- ▶ Attachments on the ball runner block can be mounted from above and below<sup>1)</sup>
- ▶ Improved rigidity under lift-off and side loading conditions due to two additional mounting screw holes at the center of the ball runner block
- ▶ End-face fastening thread for all attachments
- ▶ High rigidity in all directions of loading – permits applications with just one runner block per rail
- ▶ Integrated all-round sealing including longitudinal seal
- ▶ High torque load capacity
- ▶ Optimized entry-zone geometry and high number of balls minimize pulsation
- ▶ Smooth, quiet running thanks to optimally designed ball return and guideway
- ▶ Available in eight common sizes
- ▶ Ball runner block pre-lubricated at the factory


Definition of the format of ball runner blocks

| Criterion | Designation         | Code (example) |   |   |
|-----------|---------------------|----------------|---|---|
|           |                     | F              | N | S |
| Width     | Flange (F)          | F              |   |   |
|           | Slimline (S)        | S              |   |   |
|           | Wide (B)            | B              |   |   |
|           | Compact (C)         | C              |   |   |
| Length    | Normal (N)          |                | N |   |
|           | Long (L)            |                | L |   |
|           | Short (K)           |                | K |   |
| Height    | Standard height (S) |                |   | S |
|           | High (H)            |                |   | H |
|           | Low (N)             |                |   | N |

Note

Can be used on all SNS/SNO ball guide rails.

Overview of formats

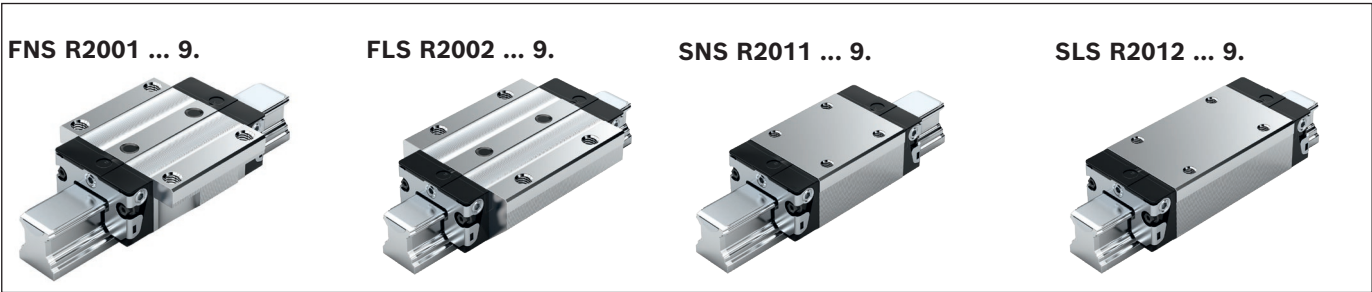

## FNS, FLS, SNS, SLS

| Format       | Size      | Ball runner blocks with size | Preload class |   |   | Accuracy class | Seal ball runner block, without ball chain | Load capacities <sup>1)</sup> (N) |                | Load moments <sup>1)</sup> (Nm) |                 |                |                 | Mass (kg) | Speed (m/s)      | Acceleration (m/s <sup>2</sup> ) |
|--------------|-----------|------------------------------|---------------|---|---|----------------|--------------------------------------------|-----------------------------------|----------------|---------------------------------|-----------------|----------------|-----------------|-----------|------------------|----------------------------------|
|              |           |                              | C2            | H | P |                |                                            | C                                 | C <sub>0</sub> | M <sub>t</sub>                  | M <sub>t0</sub> | M <sub>L</sub> | M <sub>L0</sub> | m         | v <sub>max</sub> | a <sub>max</sub>                 |
| <b>FNS</b>   | <b>15</b> | R2001 1                      | 2             | 3 | 2 |                | 90                                         | 6 880                             | 8 860          | 66                              | 85              | 47             | 61              | 0.20      | 10               | 500                              |
|              | <b>20</b> | R2001 8                      | 2             | 3 | 2 |                | 90                                         | 16 300                            | 20 800         | 210                             | 270             | 140            | 180             | 0.45      | 10               | 500                              |
|              | <b>25</b> | R2001 2                      | 2             | 3 | 2 |                | 90                                         | 20 000                            | 25 100         | 280                             | 360             | 200            | 250             | 0.60      | 10               | 500                              |
|              | <b>30</b> | R2001 7                      | 2             | 3 | 2 |                | 90                                         | 25 500                            | 33 500         | 440                             | 580             | 310            | 400             | 1.05      | 10               | 500                              |
|              | <b>35</b> | R2001 3                      | 2             | 3 | 2 |                | 90                                         | 36 200                            | 56 500         | 780                             | 1 210           | 510            | 790             | 1.50      | 10               | 500                              |
|              | <b>45</b> | R2001 4                      | 2             | 3 | 2 |                | 90                                         | 60 300                            | 92 100         | 1 630                           | 2 490           | 1 070          | 1 640           | 2.85      | 10               | 500                              |
|              | <b>55</b> | R1651 5                      | 2             | 3 | 2 |                | 90                                         | 76 300                            | 122 000        | 2 420                           | 3 860           | 1 620          | 2 580           | 4.95      | 7.5              | 250                              |
| <b>E.g.:</b> |           | R2001 7                      | 2             | 3 |   |                | 90                                         |                                   |                |                                 |                 |                |                 |           |                  |                                  |
| <b>FLS</b>   | <b>15</b> | R2002 1                      | 2             | 3 | 2 |                | 90                                         | 8 930                             | 12 800         | 86                              | 120             | 85             | 120             | 0.30      | 10               | 500                              |
|              | <b>20</b> | R2002 8                      | 2             | 3 | 2 |                | 90                                         | 20 700                            | 29 200         | 260                             | 370             | 240            | 340             | 0.55      | 10               | 500                              |
|              | <b>25</b> | R2002 2                      | 2             | 3 | 2 |                | 90                                         | 26 000                            | 36 600         | 370                             | 520             | 370            | 520             | 0.80      | 10               | 500                              |
|              | <b>30</b> | R2002 7                      | 2             | 3 | 2 |                | 90                                         | 32 100                            | 46 700         | 560                             | 810             | 520            | 750             | 1.45      | 10               | 500                              |
|              | <b>35</b> | R2002 3                      | 2             | 3 | 2 |                | 90                                         | 46 600                            | 81 100         | 1 000                           | 1 740           | 900            | 1 560           | 2.15      | 10               | 500                              |
|              | <b>45</b> | R2002 4                      | 2             | 3 | 2 |                | 90                                         | 77 700                            | 132 000        | 2 100                           | 3 570           | 1 910          | 3 250           | 4.10      | 10               | 500                              |
|              | <b>55</b> | R1653 5                      | 2             | 3 | 2 |                | 90                                         | 96 700                            | 171 000        | 3 070                           | 5 420           | 2 770          | 4 880           | 7.18      | 7.5              | 250                              |
| <b>SNS</b>   | <b>15</b> | R2011 1                      | 2             | 3 | 2 |                | 90                                         | 6 880                             | 8 860          | 66                              | 85              | 47             | 61              | 0.15      | 10               | 500                              |
|              | <b>20</b> | R2011 8                      | 2             | 3 | 2 |                | 90                                         | 16 300                            | 20 800         | 210                             | 270             | 140            | 180             | 0.35      | 10               | 500                              |
|              | <b>25</b> | R2011 2                      | 2             | 3 | 2 |                | 90                                         | 20 000                            | 25 100         | 280                             | 360             | 200            | 250             | 0.45      | 10               | 500                              |
|              | <b>30</b> | R2011 7                      | 2             | 3 | 2 |                | 90                                         | 25 500                            | 33 500         | 440                             | 580             | 310            | 400             | 0.80      | 10               | 500                              |
|              | <b>35</b> | R2011 3                      | 2             | 3 | 2 |                | 90                                         | 36 200                            | 56 500         | 780                             | 1 210           | 510            | 790             | 1.15      | 10               | 500                              |
|              | <b>45</b> | R2011 4                      | 2             | 3 | 2 |                | 90                                         | 60 300                            | 92 100         | 1 630                           | 2 490           | 1 070          | 1 640           | 2.25      | 10               | 500                              |
|              | <b>55</b> | R1622 5                      | 2             | 3 | 2 |                | 90                                         | 76 300                            | 122 000        | 2 420                           | 3 860           | 1 620          | 2 580           | 3.55      | 7.5              | 250                              |
| <b>SLS</b>   | <b>15</b> | R2012 1                      | 2             | 3 | 2 |                | 90                                         | 8 930                             | 12 800         | 86                              | 120             | 85             | 120             | 0.20      | 10               | 500                              |
|              | <b>20</b> | R2012 8                      | 2             | 3 | 2 |                | 90                                         | 20 700                            | 29 200         | 260                             | 370             | 240            | 340             | 0.45      | 10               | 500                              |
|              | <b>25</b> | R2012 2                      | 2             | 3 | 2 |                | 90                                         | 26 000                            | 36 600         | 370                             | 520             | 370            | 520             | 0.60      | 10               | 500                              |
|              | <b>30</b> | R2012 7                      | 2             | 3 | 2 |                | 90                                         | 32 100                            | 46 700         | 560                             | 810             | 520            | 750             | 1.05      | 10               | 500                              |
|              | <b>35</b> | R2012 3                      | 2             | 3 | 2 |                | 90                                         | 46 600                            | 81 100         | 1 000                           | 1 740           | 900            | 1 560           | 1.60      | 10               | 500                              |
|              | <b>45</b> | R2012 4                      | 2             | 3 | 2 |                | 90                                         | 77 700                            | 132 000        | 2 100                           | 3 570           | 1 910          | 3 250           | 3.00      | 10               | 500                              |
|              | <b>55</b> | R1623 5                      | 2             | 3 | 2 |                | 90                                         | 96 700                            | 171 000        | 3 070                           | 5 420           | 2 770          | 4 880           | 4.48      | 7.5              | 250                              |
| <b>SLS</b>   | <b>65</b> | R1623 6                      | 2             | – | 2 |                | 90                                         | 223 000                           | 404 000        | 8 810                           | 16 000          | 8 160          | 14 800          | 9.80      | 5                | 250                              |

1) Load capacities and load moments for ball runner block **without** ball chain.

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1.

Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** by 1.26 according to the table.

**Note**

**Dimensions, dimension drawing, load capacities, rigidity and moments see standard ball runner block BSHP**

**Ordering example FNS****Preload classes**

C2 = Average preload

**Seals**

SS = Standard seal

Options:

- ▶ Ball runner block FNS
- ▶ Size 30
- ▶ Preload class C2
- ▶ Accuracy class H
- ▶ With standard seal, without ball chain

Material number:

R2001 723 90

## Product description

### Characteristic features

- ▶ Compensates own misalignments (for deviations up to 10' in 2 levels)
- ▶ Extra-compact design
- ▶ The same high load capacities in all four main directions of loading
- ▶ Enables greater parallelism and vertical offsets of mounting bases
- ▶ Accuracy classes H and N
- ▶ Preload classes:  
C0 (without preload, clearance)  
C1 (moderate preload)
- ▶ Smooth operation due to optimal return and ball pick-up and entry design
- ▶ Low noise level and outstanding travel behavior
- ▶ Excellent dynamic characteristics:  
Travel speed:  $v_{\max} = 5 \text{ m/s}$   
Acceleration:  $a_{\max} = 500 \text{ m/s}^2$
- ▶ Minimum quantity lubrication system with integrated reservoir for oil lubrication
- ▶ Lube fittings with metal threads on all sides
- ▶ Ball runner block pre-lubricated at the factory
- ▶ Limitless interchangeability as all ball guide rail systems can be combined at will with all ball runner block versions within each accuracy class.

### Self-aligning

Rexroth super ball runner blocks with self-aligning feature automatically compensate misalignments up to 10 ft. No reduction in load capacity occurs as a result of angular pressure.


The centers of the mating surfaces supporting the steel bearing plates serve as a rocking fulcrum. Misalignments between ball runner blocks and ball guide rails are therefore not problematic since machining inaccuracies, mounting errors or rail deflections are automatically compensated.

The self-aligning feature ensures that the balls enter the load-bearing zone smoothly and that the load is distributed evenly across the entire row of balls.


This results in extra-smooth running and considerably longer service life.

Using two super ball runner blocks on one ball guide rail, a system of high-load bearing and stabilized ball rail systems can be created that is particularly suitable for the handling sector.

Two runner blocks must always be mounted on one rail.

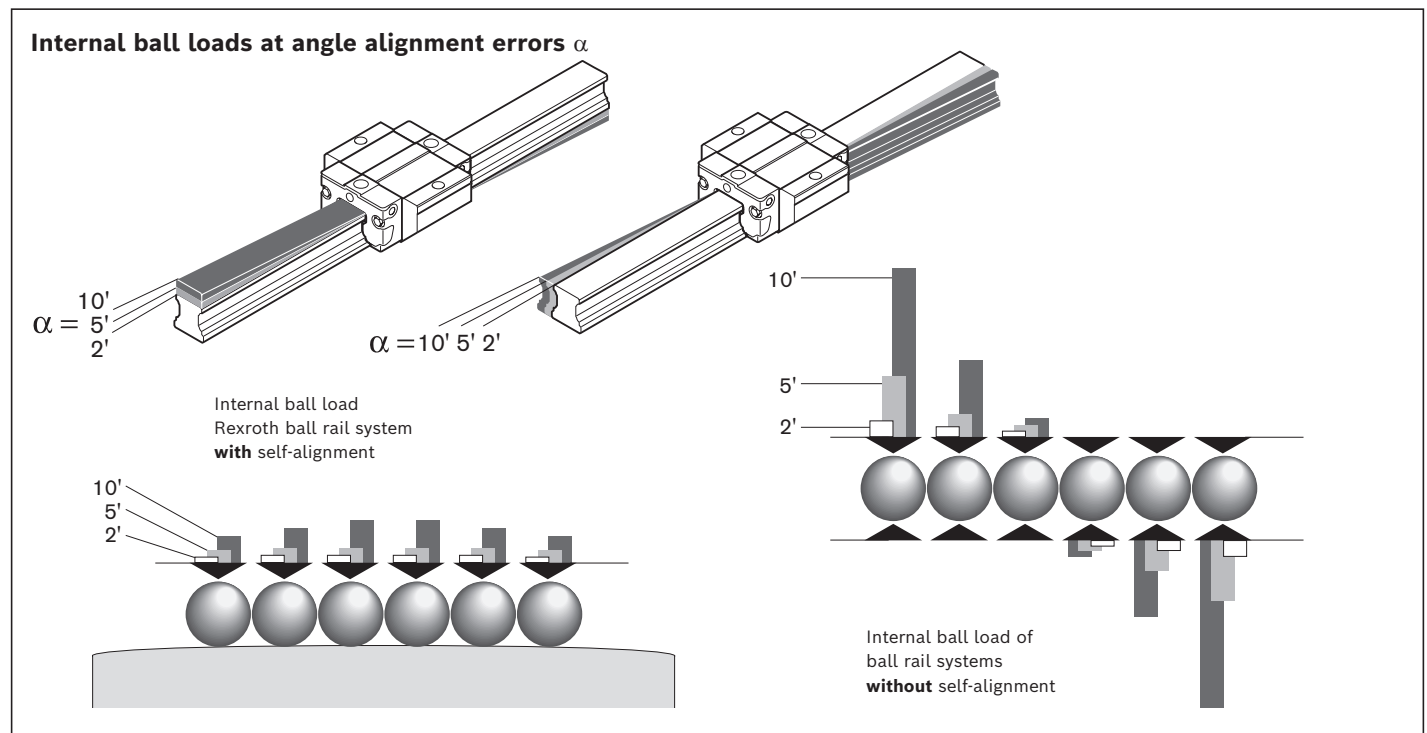


Overview of formats

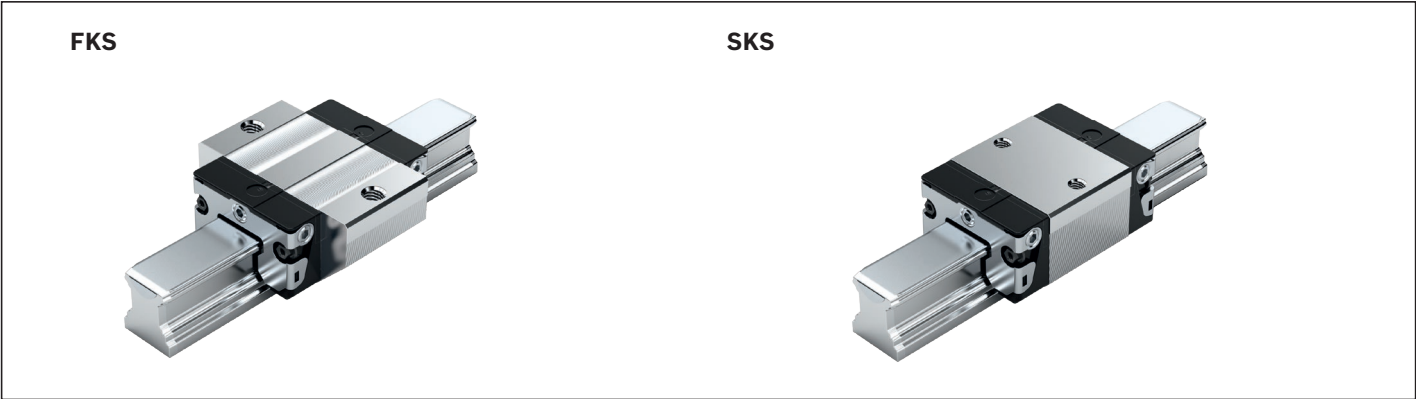

Definition of the format of ball runner blocks

| Criterion | Designation                | Code (example) |   |   |
|-----------|----------------------------|----------------|---|---|
|           |                            | F              | K | S |
| Width     | Flange <b>(F)</b>          | F              |   |   |
|           | Slimline <b>(S)</b>        | S              |   |   |
|           | Wide <b>(B)</b>            | B              |   |   |
|           | Compact <b>(C)</b>         | C              |   |   |
| Length    | Normal <b>(N)</b>          |                | N |   |
|           | Long <b>(L)</b>            |                | L |   |
|           | Short <b>(K)</b>           |                | K |   |
| Height    | Standard height <b>(S)</b> |                |   | S |
|           | High <b>(H)</b>            |                |   | H |
|           | Low <b>(N)</b>             |                |   | N |

FKS – Flange, short, standard height

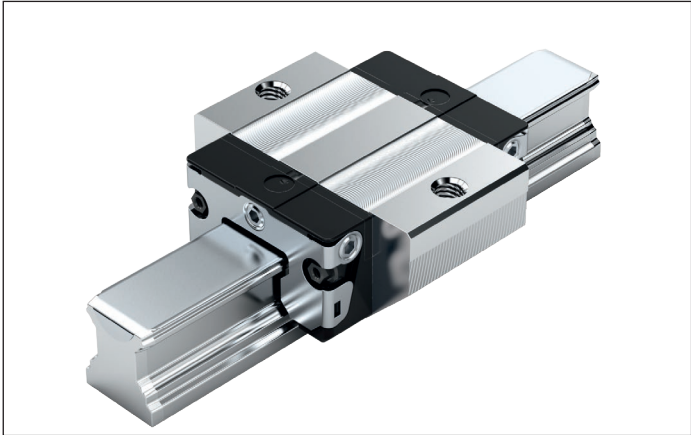

R1661 ... 2.

Dynamic characteristics

Travel speed:  $v_{\max} = 5 \text{ m/s}$   
 Acceleration:  $a_{\max} = 500 \text{ m/s}^2$   
 (If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

Note on lubrication

▶ Pre-lubricated

Note

Can be used on all SNS ball guide rails.

Options and material numbers

| Size  | Ball runner blocks with size | Preload class |    | Accuracy class |   | Seals on ball runner blocks without ball chain |    |
|-------|------------------------------|---------------|----|----------------|---|------------------------------------------------|----|
|       |                              | C0            | C1 | N              | H | SS                                             | LS |
| 15    | R1661 1                      | 9             | 1  | 4              | 3 | 20                                             | 21 |
| 20    | R1661 8                      | 9             | 1  | 4              | 3 | 20                                             | 21 |
| 25    | R1661 2                      | 9             | 1  | 4              | 3 | 20                                             | 21 |
| 30    | R1661 7                      | 9             | 1  | 4              | 3 | 20                                             | 21 |
| 35    | R1661 3                      | 9             | 1  | 4              | 3 | 20                                             | 21 |
| E.g.: | R1661 7                      |               | 1  |                | 3 | 20                                             |    |

Ordering example

Options:

- ▶ Ball runner block FKS
- ▶ Size 30
- ▶ Preload class C1
- ▶ Accuracy class H
- ▶ With standard seal, without ball chain

Material number:

R1661 713 20

Preload classes


C0 = Without preload (clearance)  
 C1 = Moderate preload

Seals


SS = Standard seal  
 LS = Low-friction seal

Key

Gray numbers  
 = No preferred variants/combinations (partially longer delivery times)

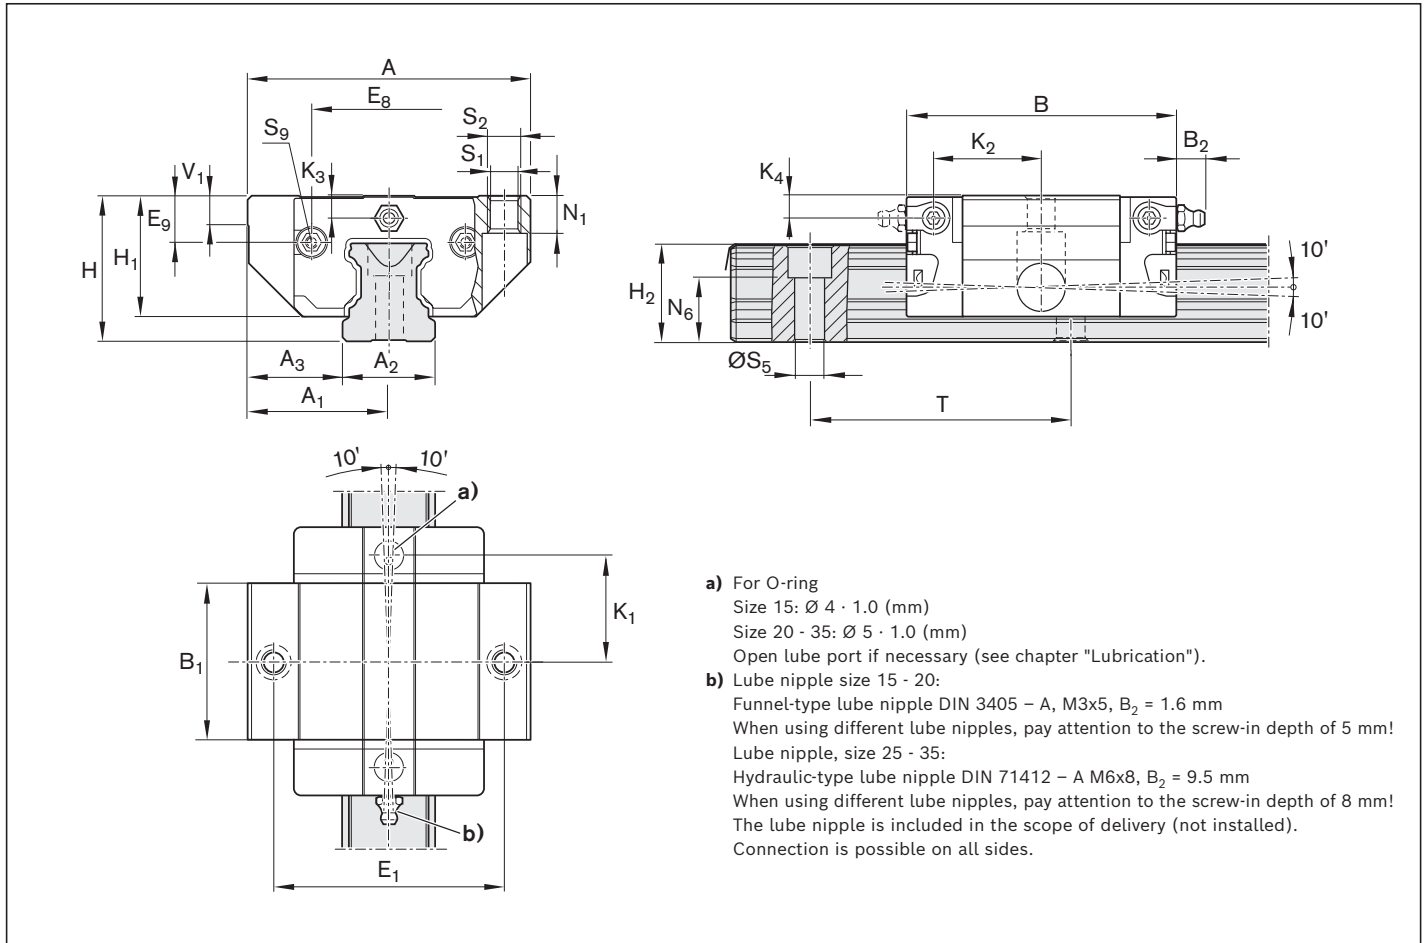

| Size | Dimensions (mm) |                |                |                |                   |                |                |                |                |    |                |                              |                              |                |                |                |                |  |
|------|-----------------|----------------|----------------|----------------|-------------------|----------------|----------------|----------------|----------------|----|----------------|------------------------------|------------------------------|----------------|----------------|----------------|----------------|--|
|      | A               | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | B <sup>+0.5</sup> | B <sub>1</sub> | E <sub>1</sub> | E <sub>8</sub> | E <sub>9</sub> | H  | H <sub>1</sub> | H <sub>2</sub> <sup>1)</sup> | H <sub>2</sub> <sup>2)</sup> | K <sub>1</sub> | K <sub>2</sub> | K <sub>3</sub> | K <sub>4</sub> |  |
| 15   | 47              | 23.5           | 15             | 16.0           | 44.7              | 25.7           | 38             | 24.55          | 6.70           | 24 | 19.90          | 16.30                        | 16.20                        | 16.25          | 17.85          | 3.20           | 3.20           |  |
| 20   | 63              | 31.5           | 20             | 21.5           | 57.3              | 31.9           | 53             | 32.50          | 7.30           | 30 | 25.35          | 20.75                        | 20.55                        | 22.95          | 22.95          | 3.35           | 3.35           |  |
| 25   | 70              | 35.0           | 23             | 23.5           | 67.0              | 38.6           | 57             | 38.30          | 11.50          | 36 | 29.90          | 24.45                        | 24.25                        | 25.35          | 26.50          | 5.50           | 5.50           |  |
| 30   | 90              | 45.0           | 28             | 31.0           | 75.3              | 45.0           | 72             | 48.40          | 14.60          | 42 | 35.35          | 28.55                        | 28.35                        | 28.80          | 30.50          | 6.05           | 6.05           |  |
| 35   | 100             | 50.0           | 34             | 33.0           | 84.9              | 51.4           | 82             | 58.00          | 17.35          | 48 | 40.40          | 32.15                        | 31.85                        | 32.70          | 34.20          | 6.90           | 6.90           |  |

| Size | Dimensions (mm) |                                |                |                |                |                |    |                | Weight<br>(kg) | Load capacities <sup>3)</sup><br>(N)<br> | Permissible<br>load (N) | Load moments <sup>3)</sup> (Nm)<br> |                  |
|------|-----------------|--------------------------------|----------------|----------------|----------------|----------------|----|----------------|----------------|------------------------------------------------------------------------------------------------------------------------------|-------------------------|--------------------------------------------------------------------------------------------------------------------------|------------------|
|      | N <sub>1</sub>  | N <sub>6</sub> <sup>±0.5</sup> | S <sub>1</sub> | S <sub>2</sub> | S <sub>5</sub> | S <sub>9</sub> | T  | V <sub>1</sub> |                |                                                                                                                              |                         | C                                                                                                                        | F <sub>max</sub> |
| 15   | 5.2             | 10.3                           | 4.3            | M5             | 4.5            | M2.5x3.5       | 60 | 5.0            | 0.15           | 3 900                                                                                                                        | 1 500                   | 39                                                                                                                       | 15               |
| 20   | 7.7             | 13.2                           | 5.3            | M6             | 6.0            | M3x5           | 60 | 6.0            | 0.30           | 10 100                                                                                                                       | 3 900                   | 130                                                                                                                      | 50               |
| 25   | 9.3             | 15.2                           | 6.7            | M8             | 7.0            | M3x5           | 60 | 7.5            | 0.50           | 11 400                                                                                                                       | 4 400                   | 170                                                                                                                      | 65               |
| 30   | 11.0            | 17.0                           | 8.5            | M10            | 9.0            | M3x5           | 80 | 7.0            | 0.80           | 15 800                                                                                                                       | 6 100                   | 270                                                                                                                      | 105              |
| 35   | 12.0            | 20.5                           | 8.5            | M10            | 9.0            | M3x5           | 80 | 8.0            | 1.20           | 21 100                                                                                                                       | 8 100                   | 450                                                                                                                      | 175              |


1) Dimension H<sub>2</sub> with cover strip

2) Dimension H<sub>2</sub> without cover strip

3) Load capacities and load moments for ball runner block **without** ball chain.

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C** and **M<sub>t</sub>** by 1.26 according to the table.

SKS – Slimline, short, standard height

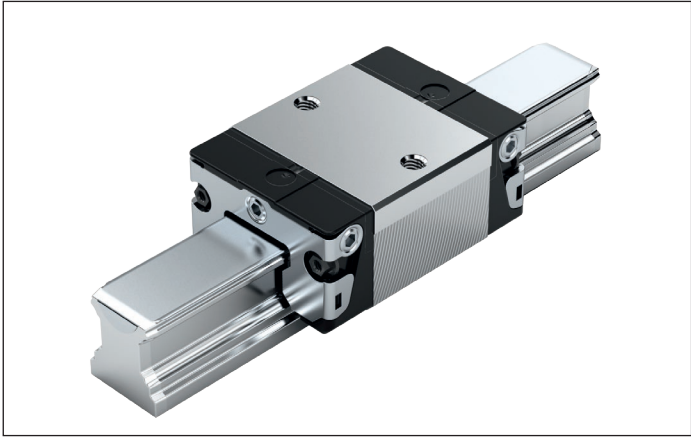

R1662 ... 2.

Dynamic characteristics

Travel speed:  $v_{\max} = 5 \text{ m/s}$   
Acceleration:  $a_{\max} = 500 \text{ m/s}^2$   
(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

Note on lubrication

► Pre-lubricated

Note

Can be used on all SNS ball guide rails.

Options and material numbers

| Size  | Ball runner blocks with size | Preload class |    | Accuracy class |   |  | Seals on ball runner blocks without ball chain |    |
|-------|------------------------------|---------------|----|----------------|---|--|------------------------------------------------|----|
|       |                              | C0            | C1 | N              | H |  | SS                                             | LS |
| 15    | R1662 1                      | 9             | 1  | 4              | 3 |  | 20                                             | 21 |
| 20    | R1662 8                      | 9             | 1  | 4              | 3 |  | 20                                             | 21 |
| 25    | R1662 2                      | 9             | 1  | 4              | 3 |  | 20                                             | 21 |
| 30    | R1662 7                      | 9             | 1  | 4              | 3 |  | 20                                             | 21 |
| 35    | R1662 3                      | 9             | 1  | 4              | 3 |  | 20                                             | 21 |
| E.g.: | R1662 7                      |               | 1  |                | 3 |  | 20                                             |    |

Ordering example

Options:

- Ball runner block SKS
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1662 713 20

Preload classes

C0 = Without preload (clearance)  
C1 = Moderate preload



Seals

SS = Standard seal  
LS = Low-friction seal

Key


Gray numbers  
= No preferred variants/combinations (partially longer delivery times)



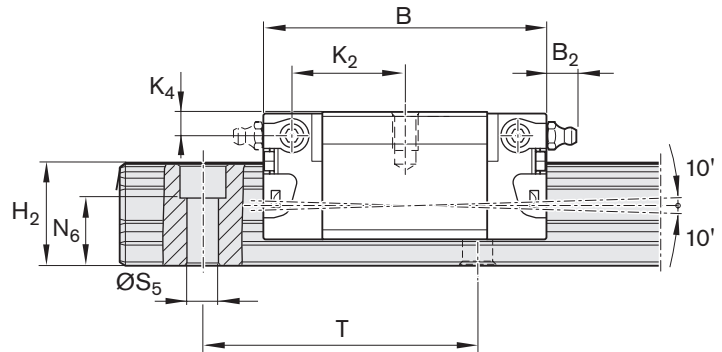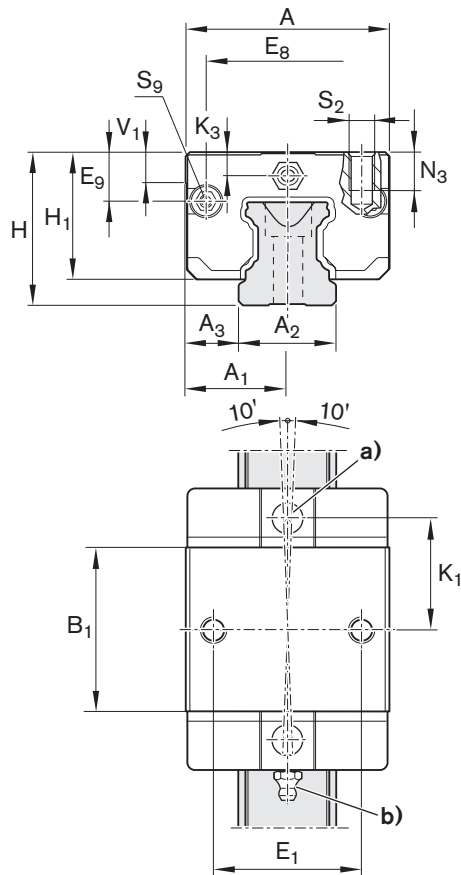

- a) For O-ring  
 Size 15:  $\varnothing 4 \cdot 1.0$  (mm)  
 Size 20 - 35:  $\varnothing 5 \cdot 1.0$  (mm)  
 Open lube port if necessary (see chapter "Lubrication").
- b) Lube nipple size 15 - 20:  
 Funnel-type lube nipple DIN 3405 - A, M3x5,  $B_2 = 1.6$  mm  
 When using different lube nipples, pay attention to the screw-in depth of 5 mm!  
 Lube nipple, size 25 - 35:  
 Hydraulic-type lube nipple DIN 71412 - A M6x8,  $B_2 = 9.5$  mm  
 When using different lube nipples, pay attention to the screw-in depth of 8 mm!  
 The lube nipple is included in the scope of delivery (not installed).  
 Connection is possible on all sides.

| Size | Dimensions (mm) |                |                |                |                   |                |                |                |                |    |                |                              |                              |                |                |                |                |
|------|-----------------|----------------|----------------|----------------|-------------------|----------------|----------------|----------------|----------------|----|----------------|------------------------------|------------------------------|----------------|----------------|----------------|----------------|
|      | A               | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | B <sup>+0.5</sup> | B <sub>1</sub> | E <sub>1</sub> | E <sub>8</sub> | E <sub>9</sub> | H  | H <sub>1</sub> | H <sub>2</sub> <sup>1)</sup> | H <sub>2</sub> <sup>2)</sup> | K <sub>1</sub> | K <sub>2</sub> | K <sub>3</sub> | K <sub>4</sub> |
| 15   | 34              | 17             | 15             | 9.5            | 44.7              | 25.7           | 26             | 24.55          | 6.70           | 24 | 19.90          | 16.30                        | 16.20                        | 16.25          | 17.85          | 3.20           | 3.20           |
| 20   | 44              | 22             | 20             | 12.0           | 57.3              | 31.9           | 32             | 32.50          | 7.30           | 30 | 25.35          | 20.75                        | 20.55                        | 22.95          | 22.95          | 3.35           | 3.35           |
| 25   | 48              | 24             | 23             | 12.5           | 67.0              | 38.6           | 35             | 38.30          | 11.50          | 36 | 29.90          | 24.45                        | 24.25                        | 25.35          | 26.50          | 5.50           | 5.50           |
| 30   | 60              | 30             | 28             | 16.0           | 75.3              | 45.0           | 40             | 48.40          | 14.60          | 42 | 35.35          | 28.55                        | 28.35                        | 28.80          | 30.50          | 6.05           | 6.05           |
| 35   | 70              | 35             | 34             | 18.0           | 84.9              | 51.4           | 50             | 58.00          | 17.35          | 48 | 40.40          | 32.15                        | 31.85                        | 32.70          | 34.20          | 6.90           | 6.90           |

| Size | Dimensions (mm) |                                |                |                |                |    |                | Mass<br>(kg) | Load capacities <sup>3)</sup><br>(N)<br> | Permissible<br>load (N) | Load moments <sup>3)</sup><br>(Nm)<br> |                  |
|------|-----------------|--------------------------------|----------------|----------------|----------------|----|----------------|--------------|------------------------------------------------------------------------------------------------------------------------------|-------------------------|-----------------------------------------------------------------------------------------------------------------------------|------------------|
|      | N <sub>3</sub>  | N <sub>6</sub> <sup>±0.5</sup> | S <sub>2</sub> | S <sub>5</sub> | S <sub>9</sub> | T  | V <sub>1</sub> |              |                                                                                                                              |                         | C                                                                                                                           | F <sub>max</sub> |
| 15   | 6.0             | 10.3                           | M4             | 4.5            | M2.5x3.5       | 60 | 5.0            | 0.10         | 3900                                                                                                                         | 1 500                   | 39                                                                                                                          | 15               |
| 20   | 7.5             | 13.2                           | M5             | 6.0            | M3x5           | 60 | 6.0            | 0.25         | 10 100                                                                                                                       | 3900                    | 130                                                                                                                         | 50               |
| 25   | 9.0             | 15.2                           | M6             | 7.0            | M3x5           | 60 | 7.5            | 0.35         | 11 400                                                                                                                       | 4 400                   | 170                                                                                                                         | 65               |
| 30   | 12.0            | 17.0                           | M8             | 9.0            | M3x5           | 80 | 7.0            | 0.60         | 15 800                                                                                                                       | 6 100                   | 270                                                                                                                         | 105              |
| 35   | 13.0            | 20.5                           | M8             | 9.0            | M3x5           | 80 | 8.0            | 0.90         | 21 100                                                                                                                       | 8 100                   | 450                                                                                                                         | 175              |

1) Dimension H<sub>2</sub> with cover strip

2) Dimension H<sub>2</sub> without cover strip

3) Load capacities and load moments for ball runner block **without** ball chain.

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C** and **M<sub>t</sub>** by 1.26 according to the table.

# Product description

## Characteristic features

Rexroth ball rail systems with aluminum ball runner blocks have been developed specially for industrial robots and general machine building requiring compact, ball bearing-mounted longitudinal guides in various accuracy classes with very high load-bearing capacity and low gravity.

The extremely small and lightweight guide units in five common sizes have the same high load capacities in all four main directions of loading.

## Highlights


- ▶ High torque load capacity
- ▶ Optimized entry-zone geometry and high number of balls minimize variation in elastic deflection
- ▶ Extra-compact lightweight design 60% less weight due to aluminum compared to the ball runner blocks made of steel
- ▶ Limitless interchangeability as all ball guide rail systems can be combined at will with all ball runner block versions within each accuracy class.

## Further highlights

- ▶ Low noise level and outstanding travel behavior
- ▶ Excellent dynamic characteristics:  
Travel speed:  $v_{\max} = 5 \text{ m/s}$   
Acceleration:  $a_{\max} = 500 \text{ m/s}^2$
- ▶ Long-term lubrication is possible over several years
- ▶ Minimum quantity lubrication with integrated reservoir for oil lubrication
- ▶ Enables greater parallelism and vertical offsets of mounting bases
- ▶ Accuracy classes H and N are combinable with all rails in each accuracy class
- ▶ Lube connection with metal thread on all sides
- ▶ End-face fastening thread for all attachments
- ▶ Ball guide rails of accuracy class H are also available with surface protection Resist CR (matt silver finish, hard chrome plated)
- ▶ Quiet, smooth running thanks to optimally designed ball and ball chain return and guideway
- ▶ Improved rigidity under lift-off and side loading conditions due to two additional mounting screw holes at the center of the ball runner block<sup>1)</sup>
- ▶ Attachments on the ball runner block can be mounted from above and below<sup>1)</sup>
- ▶ Predrilled holes on the Ball Runner Block for pinned fitting
- ▶ Optionally available with ball chain
- ▶ Ball runner block pre-lubricated at the factory

1) Type-dependent

Overview

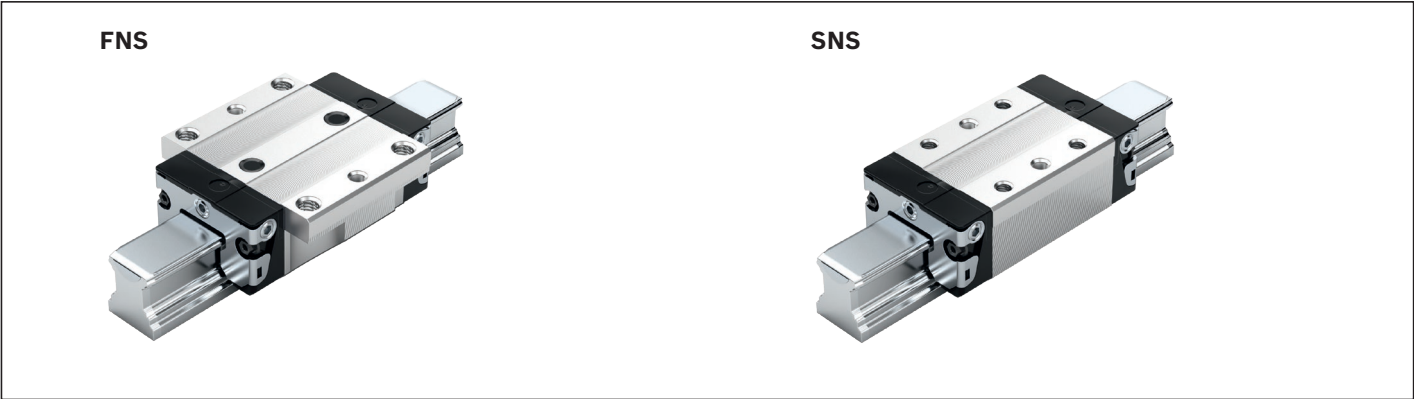


Definition of the format of ball runner blocks

| Criterion | Designation                | Code (example) |   |   |
|-----------|----------------------------|----------------|---|---|
|           |                            | F              | N | S |
| Width     | Flange <b>(F)</b>          | F              |   |   |
|           | Slimline <b>(S)</b>        | S              |   |   |
|           | Wide <b>(B)</b>            | B              |   |   |
|           | Compact <b>(C)</b>         | C              |   |   |
| Length    | Normal <b>(N)</b>          |                | N |   |
|           | Long <b>(L)</b>            |                | L |   |
|           | Short <b>(K)</b>           |                | K |   |
| Height    | Standard height <b>(S)</b> |                |   | S |
|           | High <b>(H)</b>            |                |   | H |
|           | Low <b>(N)</b>             |                |   | N |



**Ball chain (optional)**  
► Optimized noise level

## FNS – Flange, normal, standard height

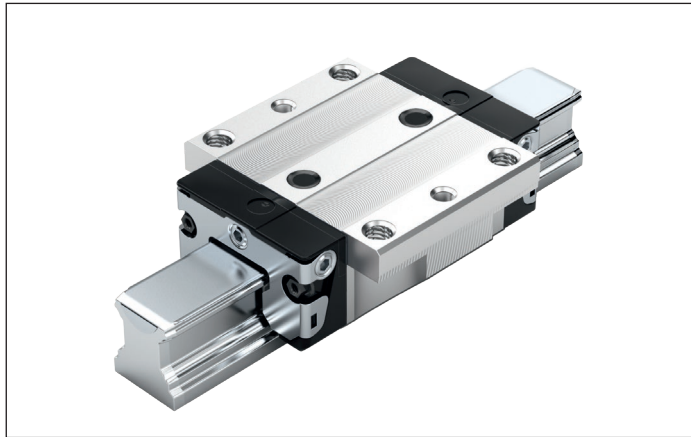**R1631 ... 2.****Dynamic characteristics**

Speed:  $v_{\max} = 5 \text{ m/s}$   
 Acceleration:  $a_{\max} = 500 \text{ m/s}^2$   
 (If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

**Note on lubrication**


► Pre-lubricated

**Note**

Can be used on all SNS ball guide rails.

**Options/material numbers/technical data**

| Size  | Ball runner blocks with size | Preload class |    | Accuracy class |   | Seals on ball runner blocks |                 |    |    |
|-------|------------------------------|---------------|----|----------------|---|-----------------------------|-----------------|----|----|
|       |                              | C0            | C1 | N              | H | without ball chain          | with ball chain | SS | LS |
| 15    | R1631 1                      | 9             | 1  | 4              | 3 | 20                          | 21              | 22 | 23 |
| 20    | R1631 8                      | 9             | 1  | 4              | 3 | 20                          | 21              | 22 | 23 |
| 25    | R1631 2                      | 9             | 1  | 4              | 3 | 20                          | 21              | 22 | 23 |
| 30    | R1631 7                      | 9             | 1  | 4              | 3 | 20                          | 21              | 22 | 23 |
| 35    | R1631 3                      | 9             | 1  | 4              | 3 | 20                          | 21              | 22 | 23 |
| E.g.: | R1631 7                      |               | 1  |                | 3 | 20                          |                 |    |    |

| Size | Load capacities <sup>1)</sup> (N)                                                   | Permissible load (N) | Load moments <sup>1)</sup> (Nm)                                                     |                                                                                       |                                                                                       |                                                                                       |
|------|-------------------------------------------------------------------------------------|----------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|      |  |                      |  |  |  |  |
|      | C                                                                                   | F <sub>max</sub>     | M <sub>t</sub>                                                                      | M <sub>t max</sub>                                                                    | M <sub>L</sub>                                                                        | M <sub>L max</sub>                                                                    |
| 15   | 9 860                                                                               | 3 000                | 95                                                                                  | 29                                                                                    | 68                                                                                    | 16                                                                                    |
| 20   | 23 400                                                                              | 7 200                | 300                                                                                 | 92                                                                                    | 200                                                                                   | 50                                                                                    |
| 25   | 28 600                                                                              | 8 800                | 410                                                                                 | 125                                                                                   | 290                                                                                   | 70                                                                                    |
| 30   | 36 500                                                                              | 12 200               | 630                                                                                 | 210                                                                                   | 440                                                                                   | 110                                                                                   |
| 35   | 51 800                                                                              | 16 200               | 1 110                                                                               | 345                                                                                   | 720                                                                                   | 170                                                                                   |

1) Load capacities and load moments for ball runner block **without** ball chain.

Load capacities and load moments for ball runner block **with** ball chain  13

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1.

Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** by 1.26 according to the table.

**Ordering example**

Options:

- Ball runner block FNS
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1631 713 20

**Preload classes**

C0 = Without preload (clearance)  
 C1 = Moderate preload


**Seals**

SS = Standard seal  
 LS = Low-friction seal

**Key**

Gray numbers

= No preferred variants/combinations (partially longer delivery times)

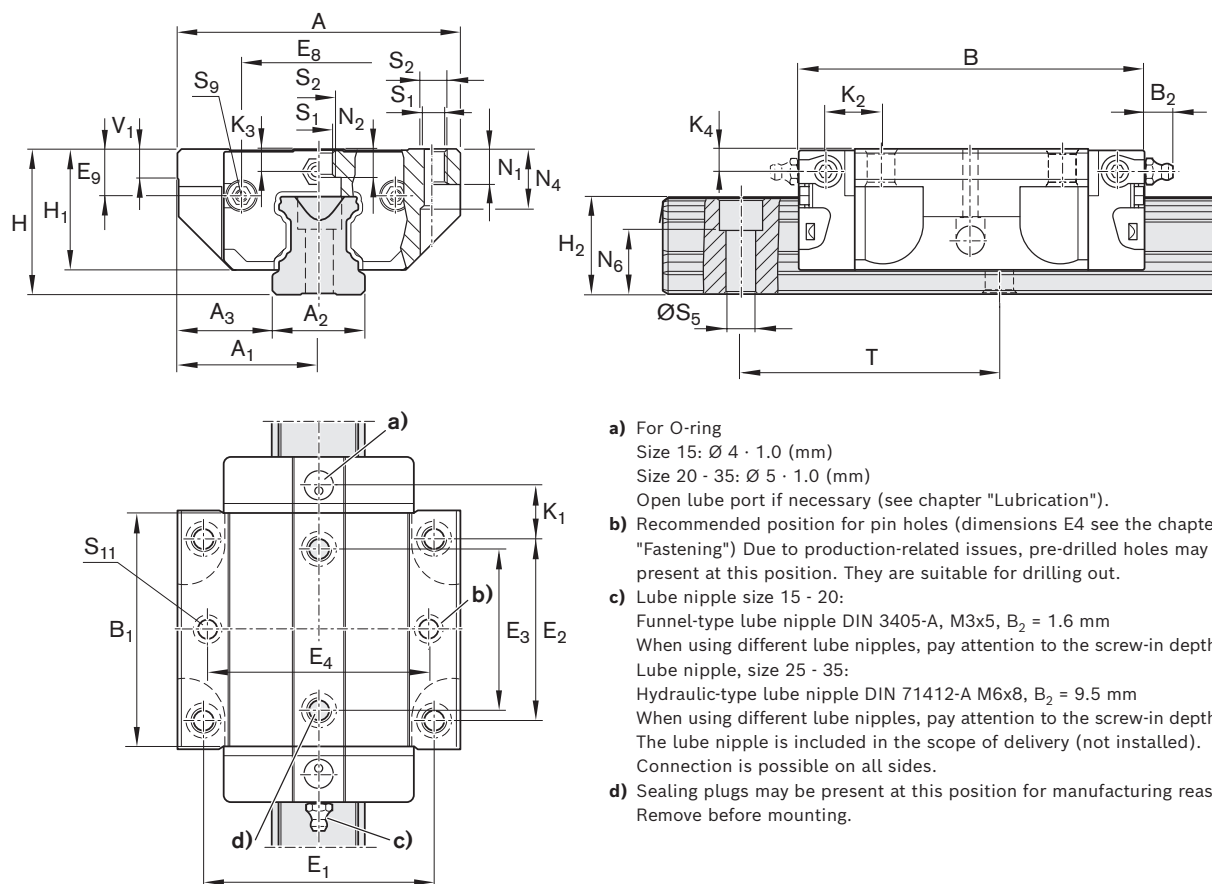


| Size | Dimensions (mm) |                |                |                |                   |                |                |                |                |                |                |    |                |                              |                              |                |                |                |                |  |
|------|-----------------|----------------|----------------|----------------|-------------------|----------------|----------------|----------------|----------------|----------------|----------------|----|----------------|------------------------------|------------------------------|----------------|----------------|----------------|----------------|--|
|      | A               | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | B <sup>+0.5</sup> | B <sub>1</sub> | E <sub>1</sub> | E <sub>2</sub> | E <sub>3</sub> | E <sub>8</sub> | E <sub>9</sub> | H  | H <sub>1</sub> | H <sub>2</sub> <sup>1)</sup> | H <sub>2</sub> <sup>2)</sup> | K <sub>1</sub> | K <sub>2</sub> | K <sub>3</sub> | K <sub>4</sub> |  |
| 15   | 47              | 23.5           | 15             | 16.0           | 58.2              | 39.2           | 38             | 30             | 26             | 24.55          | 6.70           | 24 | 19.90          | 16.30                        | 16.20                        | 8.00           | 9.6            | 3.20           | 3.20           |  |
| 20   | 63              | 31.5           | 20             | 21.5           | 75.0              | 49.6           | 53             | 40             | 35             | 32.50          | 7.30           | 30 | 25.35          | 20.75                        | 20.55                        | 11.80          | 11.8           | 3.35           | 3.35           |  |
| 25   | 70              | 35.0           | 23             | 23.5           | 86.2              | 57.8           | 57             | 45             | 40             | 38.30          | 11.50          | 36 | 29.90          | 24.45                        | 24.25                        | 12.45          | 13.6           | 5.50           | 5.50           |  |
| 30   | 90              | 45.0           | 28             | 31.0           | 97.7              | 67.4           | 72             | 52             | 44             | 48.40          | 14.60          | 42 | 35.35          | 28.55                        | 28.35                        | 14.00          | 15.7           | 6.05           | 6.05           |  |
| 35   | 100             | 50.0           | 34             | 33.0           | 110.5             | 77.0           | 82             | 62             | 52             | 58.00          | 17.35          | 48 | 40.40          | 32.15                        | 31.85                        | 14.50          | 16.0           | 6.90           | 6.90           |  |

| Size | Dimensions (mm) |                |                |                                |                |                |                |                |                 |    |                | Mass (kg) |
|------|-----------------|----------------|----------------|--------------------------------|----------------|----------------|----------------|----------------|-----------------|----|----------------|-----------|
|      | N <sub>1</sub>  | N <sub>2</sub> | N <sub>4</sub> | N <sub>6</sub> <sup>±0.5</sup> | S <sub>1</sub> | S <sub>2</sub> | S <sub>5</sub> | S <sub>9</sub> | S <sub>11</sub> | T  | V <sub>1</sub> |           |
| 15   | 5.2             | 4.40           | 10.3           | 10.3                           | 4.3            | M5             | 4.5            | M2.5x3.5       | 3.7             | 60 | 5.0            | 0.10      |
| 20   | 7.7             | 5.20           | 13.5           | 13.2                           | 5.3            | M6             | 6.0            | M3x5           | 4.7             | 60 | 6.0            | 0.24      |
| 25   | 9.3             | 7.00           | 17.8           | 15.2                           | 6.7            | M8             | 7.0            | M3x5           | 5.7             | 60 | 7.5            | 0.30      |
| 30   | 11.0            | 7.90           | 20.5           | 17.0                           | 8.5            | M10            | 9.0            | M3x5           | 7.7             | 80 | 7.0            | 0.55      |
| 35   | 12.0            | 10.15          | 24.0           | 20.5                           | 8.5            | M10            | 9.0            | M3x5           | 7.7             | 80 | 8.0            | 0.75      |

- 1) Dimension H<sub>2</sub> with cover strip  
 2) Dimension H<sub>2</sub> without cover strip

## SNS – Slimline, normal, standard height

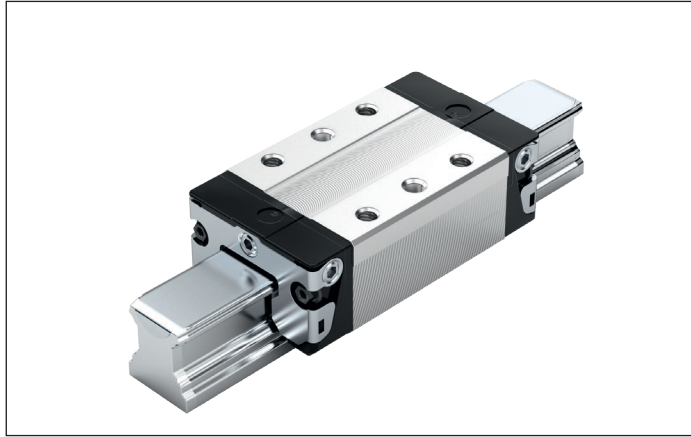**R1632 ... 2.****Dynamic characteristics**

Travel speed:  $v_{\max} = 5 \text{ m/s}$   
 Acceleration:  $a_{\max} = 500 \text{ m/s}^2$   
 (If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

**Note on lubrication**



► Pre-lubricated

**Note**

Can be used on all SNS ball guide rails.

**Options/material numbers/technical data**

| Size  | Ball runner blocks with size | Preload class |    | Accuracy class |   | Seals on ball runner blocks |    |    |                 |
|-------|------------------------------|---------------|----|----------------|---|-----------------------------|----|----|-----------------|
|       |                              | C0            | C1 | N              | H | without ball chain          | SS | LS | with ball chain |
| 15    | R1632 1                      | 9             | 1  | 4              | 3 | 20                          | 21 | 22 | 23              |
| 20    | R1632 8                      | 9             | 1  | 4              | 3 | 20                          | 21 | 22 | 23              |
| 25    | R1632 2                      | 9             | 1  | 4              | 3 | 20                          | 21 | 22 | 23              |
| 30    | R1632 7                      | 9             | 1  | 4              | 3 | 20                          | 21 | 22 | 23              |
| 35    | R1632 3                      | 9             | 1  | 4              | 3 | 20                          | 21 | 22 | 23              |
| E.g.: | R1632 7                      |               | 1  |                | 3 | 20                          |    |    |                 |

| Size | Load capacities <sup>1)</sup> (N)                                                        | Permissible load (N) | Load moments <sup>1)</sup> (Nm)                                                              |              |                                                                                                |              |
|------|------------------------------------------------------------------------------------------|----------------------|----------------------------------------------------------------------------------------------|--------------|------------------------------------------------------------------------------------------------|--------------|
|      | <br>C |                      | <br>$M_t$ | $M_{t \max}$ | <br>$M_L$ | $M_{L \max}$ |
| 15   | 9 860                                                                                    | 3 000                | 95                                                                                           | 29           | 68                                                                                             | 16           |
| 20   | 23 400                                                                                   | 7 200                | 300                                                                                          | 92           | 200                                                                                            | 50           |
| 25   | 28 600                                                                                   | 8 800                | 410                                                                                          | 125          | 290                                                                                            | 70           |
| 30   | 36 500                                                                                   | 12 200               | 630                                                                                          | 210          | 440                                                                                            | 110          |
| 35   | 51 800                                                                                   | 16 200               | 1 110                                                                                        | 345          | 720                                                                                            | 170          |

1) Load capacities and load moments for ball runner block **without** ball chain.

Load capacities and load moments for ball runner block **with** ball chain  13

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1.

Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**,  **$M_t$**  and  **$M_L$**  by 1.26 according to the table.

**Ordering example**

Options:

- Ball runner block SNS
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1632 713 20

**Preload classes**

C0 = Without preload (clearance)  
 C1 = Moderate preload


**Seals**

SS = Standard seal  
 LS = Low-friction seal

**Key**

Gray numbers

= No preferred variants/combinations (partially longer delivery times)

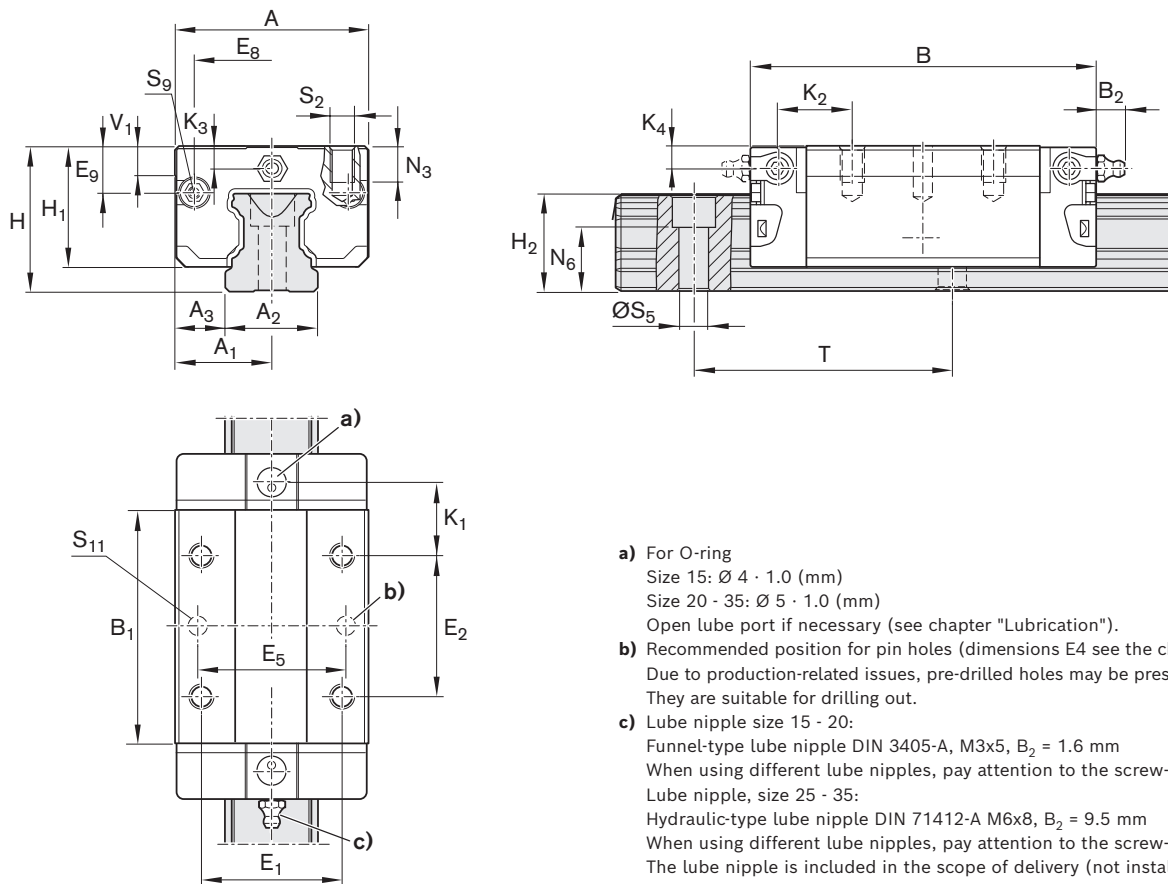

| Size | Dimensions (mm) |                |                |                |                   |                |                |                |                |                |    |                |                               |                               |                |                |                |                |  |
|------|-----------------|----------------|----------------|----------------|-------------------|----------------|----------------|----------------|----------------|----------------|----|----------------|-------------------------------|-------------------------------|----------------|----------------|----------------|----------------|--|
|      | A               | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | B <sup>+0.5</sup> | B <sub>1</sub> | E <sub>1</sub> | E <sub>2</sub> | E <sub>8</sub> | E <sub>9</sub> | H  | H <sub>1</sub> | H <sub>2</sub> <sup>(1)</sup> | H <sub>2</sub> <sup>(2)</sup> | K <sub>1</sub> | K <sub>2</sub> | K <sub>3</sub> | K <sub>4</sub> |  |
| 15   | 34              | 17             | 15             | 9.5            | 58.2              | 39.2           | 26             | 26             | 24.55          | 6.70           | 24 | 19.90          | 16.30                         | 16.20                         | 10.00          | 11.60          | 3.20           | 3.20           |  |
| 20   | 44              | 22             | 20             | 12.0           | 75.0              | 49.6           | 32             | 36             | 32.50          | 7.30           | 30 | 25.35          | 20.75                         | 20.55                         | 13.80          | 13.80          | 3.35           | 3.35           |  |
| 25   | 48              | 24             | 23             | 12.5           | 86.2              | 57.8           | 35             | 35             | 38.30          | 11.50          | 36 | 29.90          | 24.45                         | 24.25                         | 17.45          | 18.60          | 5.50           | 5.50           |  |
| 30   | 60              | 30             | 28             | 16.0           | 97.7              | 67.4           | 40             | 40             | 48.40          | 14.60          | 42 | 35.35          | 28.55                         | 28.35                         | 20.00          | 21.70          | 6.05           | 6.05           |  |
| 35   | 70              | 35             | 34             | 18.0           | 110.5             | 77.0           | 50             | 50             | 58.00          | 17.35          | 48 | 40.40          | 32.15                         | 31.85                         | 20.50          | 22.00          | 6.90           | 6.90           |  |

| Size | Dimensions (mm) |                                |                |                |                |                 |    |                | Mass<br>(kg) |
|------|-----------------|--------------------------------|----------------|----------------|----------------|-----------------|----|----------------|--------------|
|      | N <sub>3</sub>  | N <sub>6</sub> <sup>+0.5</sup> | S <sub>2</sub> | S <sub>5</sub> | S <sub>9</sub> | S <sub>11</sub> | T  | V <sub>1</sub> |              |
| 15   | 6.0             | 10.3                           | M4             | 4.5            | M2.5x3.5       | 3.7             | 60 | 5.0            | 0.10         |
| 20   | 7.5             | 13.2                           | M5             | 6.0            | M3x5           | 4.7             | 60 | 6.0            | 0.20         |
| 25   | 9.0             | 15.2                           | M6             | 7.0            | M3x5           | 5.7             | 60 | 7.5            | 0.35         |
| 30   | 12.0            | 17.0                           | M8             | 9.0            | M3x5           | 7.7             | 80 | 7.0            | 0.45         |
| 35   | 13.0            | 20.5                           | M8             | 9.0            | M3x5           | 7.7             | 80 | 8.0            | 0.65         |

- 1) Dimension H<sub>2</sub> with cover strip  
 2) Dimension H<sub>2</sub> without cover strip


# Product description

**General notes on corrosion-resistant ball runner blocks Resist NR**

- ▶ As Resist NR is not a coating, all dimensions and tolerances, dynamic characteristics, load capacities, rigidity and moments are identical to the standard steel version.  
For material numbers, please refer to the following page.
- ▶ Can be used on all SNS/SNO ball guide rails.
- ▶ Ball runner block body made of corrosion-resistant steel as per DIN EN 10088. Version recommended by Rexroth if corrosion protection is required. Fast delivery.
- ▶ Pre-lubricated

**Overview of formats**


**FNS**  
R2001 ... 3.



**FLS**  
R2002 ... 3.



**FKS**  
R2000 ... 3.




**SNS**  
R2011 ... 3.



**SLS**  
R2012 ... 3.



**SKS**  
R2010 ... 3.



**Definition of the format of ball runner blocks**

| Criterion | Designation                | Code (example) |   |   |
|-----------|----------------------------|----------------|---|---|
|           |                            | F              | N | S |
| Width     | Flange <b>(F)</b>          | F              |   |   |
|           | Slimline <b>(S)</b>        | S              |   |   |
|           | Wide <b>(B)</b>            | B              |   |   |
|           | Compact <b>(C)</b>         | C              |   |   |
| Length    | Normal <b>(N)</b>          |                | N |   |
|           | Long <b>(L)</b>            |                | L |   |
|           | Short <b>(K)</b>           |                | K |   |
| Height    | Standard height <b>(S)</b> |                |   | S |
|           | High <b>(H)</b>            |                |   | H |
|           | Low <b>(N)</b>             |                |   | N |



**Ball chain (optional)**

- ▶ Optimized noise level



## FNS, FLS, FKS, SNS, SLS, SKS

| Format | Size | Ball runner blocks with size | Preload class |    | Accuracy class | Seals on ball runner blocks |    |    |                 |    |    |
|--------|------|------------------------------|---------------|----|----------------|-----------------------------|----|----|-----------------|----|----|
|        |      |                              | C0            | C1 |                | without ball chain          |    |    | with ball chain |    |    |
|        |      |                              |               |    | H              | SS                          | LS | DS | SS              | LS | DS |
| FNS    | 15   | R2001 1                      | 9             | –  | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        | 20   | R2001 8                      | 9             | –  | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        | 25   | R2001 2                      | 9             | –  | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        | 30   | R2001 7                      | 9             | –  | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        |      |                              |               | 1  | 3              | 30                          | 31 | 3Z | 32              | 33 | 3Y |
|        | 35   | R2001 3                      | 9             | –  | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        |      |                              | 1             | 3  | 30             | 31                          | 3Z | 32 | 33              | 3Y |    |
| E.g.:  |      | R2001 7                      | 1             |    | 3              | 30                          |    |    |                 |    |    |
|        |      |                              |               |    |                |                             |    |    |                 |    |    |
| FLS    | 15   | R2002 1                      | 9             | –  | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        | 20   | R2002 8                      | 9             | –  | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        | 25   | R2002 2                      | 9             | –  | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        | 30   | R2002 7                      | 9             | –  | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        |      |                              |               | 1  | 3              | 30                          | 31 | 3Z | 32              | 33 | 3Y |
|        | 35   | R2002 3                      | 9             | –  | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        |      |                              | 1             | 3  | 30             | 31                          | 3Z | 32 | 33              | 3Y |    |
|        |      |                              |               |    |                |                             |    |    |                 |    |    |
| FKS    | 15   | R2000 1                      | 9             | –  | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        | 20   | R2000 8                      | 9             | –  | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        | 25   | R2000 2                      | 9             | –  | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        | 30   | R2000 7                      | 9             | –  | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        |      |                              |               | 1  | 3              | 30                          | 31 | 3Z | 32              | 33 | 3Y |
|        | 35   | R2000 3                      | 9             | –  | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        |      |                              | 1             | 3  | 30             | 31                          | 3Z | 32 | 33              | 3Y |    |
|        |      |                              |               |    |                |                             |    |    |                 |    |    |
| SNS    | 15   | R2011 1                      | 9             | –  | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        | 20   | R2011 8                      | 9             | –  | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        | 25   | R2011 2                      | 9             | –  | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        | 30   | R2011 7                      | 9             | –  | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        |      |                              |               | 1  | 3              | 30                          | 31 | 3Z | 32              | 33 | 3Y |
|        | 35   | R2011 3                      | 9             | –  | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        |      |                              | 1             | 3  | 30             | 31                          | 3Z | 32 | 33              | 3Y |    |
|        |      |                              |               |    |                |                             |    |    |                 |    |    |
| SLS    | 15   | R2012 1                      | 9             |    | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        | 20   | R2012 8                      | 9             |    | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        | 25   | R2012 2                      | 9             |    | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        | 30   | R2012 7                      | 9             |    | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        |      |                              |               | 1  | 3              | 30                          | 31 | 3Z | 32              | 33 | 3Y |
|        | 35   | R2012 3                      | 9             |    | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        |      |                              | 1             | 3  | 30             | 31                          | 3Z | 32 | 33              | 3Y |    |
|        |      |                              |               |    |                |                             |    |    |                 |    |    |
| SKS    | 15   | R2010 1                      | 9             | –  | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        | 20   | R2010 8                      | 9             | –  | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        | 25   | R2010 2                      | 9             | –  | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        | 30   | R2010 7                      | 9             |    | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        |      |                              |               | 1  | 3              | 30                          | 31 | 3Z | 32              | 33 | 3Y |
|        | 35   | R2010 3                      | 9             |    | 3              | 30                          | 31 | –  | 32              | 33 | –  |
|        |      |                              | 1             | 3  | 30             | 31                          | 3Z | 32 | 33              | 3Y |    |

**Ordering example FNS**

Options:

- ▶ Ball runner block BSHP Resist NR, FNS
- ▶ Size 30
- ▶ Preload class C1
- ▶ Accuracy class H
- ▶ With standard seal, without ball chain

Material number: R2001 713 30

**Note**

Dimensions, dimension drawing, load capacities, rigidity and moments see standard ball runner block BSHP

**Preload classes**

C0 = Without preload (clearance)  
C1 = Moderate preload

**Seals**

SS = Standard seal  
LS = Low-friction seal  
DS = Double-lip seal

**Key**

Gray numbers

= No preferred variants/combinations (partially longer delivery times)

# Product description

## Characteristic features

Ball rail systems Resist NR II made of corrosion-resistant steel<sup>1)</sup> are used specifically in conjunction with water-based media, heavily diluted acidic materials, alkali or saline solutions. These guides are also ideally suitable for use at relative humidities above 70% and temperatures exceeding 30 °C.

Such conditions are found mainly in cleaning plants, electroplating and pickling lines, vapor degreasing plants and refrigeration systems.

Since no additional corrosion protection is required, ball rail systems Resist NR II are ideally suited for use in clean rooms and general printed circuit board manufacturing. They are also suitable for other applications in the general packaging industry.

## General notes on ball runner blocks Resist NR II

- ▶ Can be used on all SNS ball guide rails, not initially lubricated, not preserved
- ▶ For dimensions see corresponding ball runner blocks made of steel

## Highlights

- ▶ All metal parts are made of corrosion-resistant steel
- ▶ Available in five common sizes
- ▶ Excellent dynamic characteristics:  
Travel speed:  $v_{\max} = 5 \text{ m/s}$   
Acceleration:  $a_{\max} = 500 \text{ m/s}^2$
- ▶ The same high load capacities in all four main directions of loading
- ▶ Available in accuracy classes N, H and P, up to preload class C2
- ▶ Long-term lubrication is possible over several years
- ▶ Minimum quantity lubrication system with integrated reservoir for oil lubrication
- ▶ Lube fittings with metal threads on all sides
- ▶ Optionally available with ball chain

### 1) Resist NR II:

Ball runner block body and ball guide rail as well as all steel parts made of corrosion-resistant steel in accordance with DIN EN 10088

## General notes


- ▶ Ball rail systems for sectors of the food industry, see the ball rail systems NRFG catalog R310DE2226 (2011.04).
- ▶ Combinations of different accuracy classes  
Combining ball guide rails and ball runner blocks of different accuracy classes results in different tolerances for the dimensions H and A3. See "Accuracy classes and their tolerances".
- ▶ Combinations of different materials  
Combining ball guide rails and ball runner blocks made of different materials will change the load capacities, permitted loads and load moments. The lower value must be used in each case.

### Further highlights

- ▶ Limitless interchangeability as all ball guide rail systems can be combined at will with all ball runner block versions within each accuracy class (also made of steel, aluminum, Resist NR or Resist CR)
- ▶ Maximum system rigidity due to preloaded O-arrangement
- ▶ Existing range of accessories fully usable
- ▶ Attachments on the ball runner block can be mounted from above and below<sup>2)</sup>
- ▶ Improved rigidity under lift-off and side loading conditions due to two additional mounting screw holes at the center of the ball runner block<sup>2)</sup>
- ▶ End-face fastening thread for all attachments
- ▶ High rigidity in all directions of loading – permits applications with just one runner block per rail
- ▶ Integrated all-round sealing
- ▶ Optimized entry-zone geometry and high number of balls minimize variation in elastic deflection
- ▶ Quiet, smooth running thanks to optimally designed ball and ball chain return and guideway
- ▶ Ball guide rail Resist NR II, with or without cover strip, available for bolting from above and below
- ▶ Ball runner block also available with chrome-plated ball guide rails

2) Type-dependent

### Overview of formats

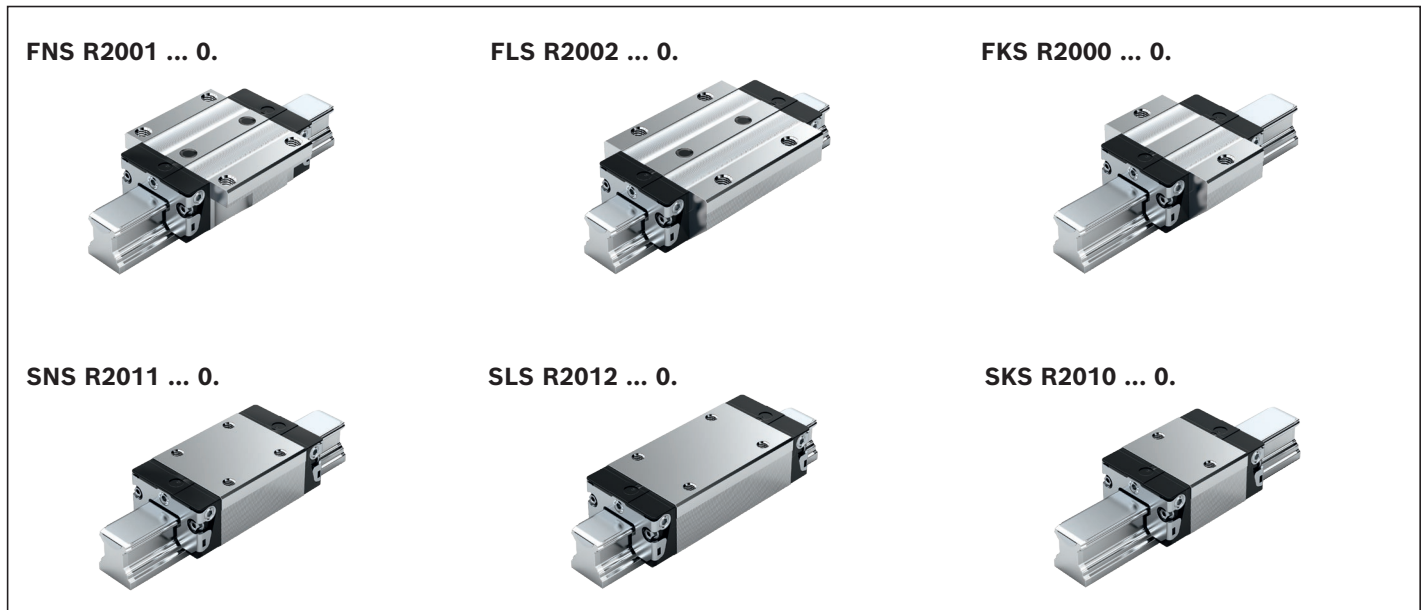

### Definition of the format of ball runner blocks

| Criterion | Designation                  | Code (example) |   |   |
|-----------|------------------------------|----------------|---|---|
|           |                              | F              | N | S |
| Width     | Flange ( <b>F</b> )          | F              |   |   |
|           | Slimline ( <b>S</b> )        | S              |   |   |
|           | Wide ( <b>B</b> )            | B              |   |   |
|           | Compact ( <b>C</b> )         | C              |   |   |
| Length    | Normal ( <b>N</b> )          |                | N |   |
|           | Long ( <b>L</b> )            |                | L |   |
|           | Short ( <b>K</b> )           |                | K |   |
| Height    | Standard height ( <b>S</b> ) |                |   | S |
|           | High ( <b>H</b> )            |                |   | H |
|           | Low ( <b>N</b> )             |                |   | N |



### Ball chain (optional)

- ▶ Optimized noise level

## FNS, FLS, FKS, SNS, SLS, SKS

| Size | Ball runner blocks with size | Preload class |    |    | Accuracy class |   |   | Seals on ball runner blocks |    |    |                 |    |    | Mass (kg)<br>(m) | Load capacities <sup>2)</sup><br>(N) |                | Load moments <sup>2)</sup> (Nm)                                                     |                                                                                     |                                                                                     |                                                                                     |
|------|------------------------------|---------------|----|----|----------------|---|---|-----------------------------|----|----|-----------------|----|----|------------------|--------------------------------------|----------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|      |                              | C0            | C1 | C2 | N              | H | P | without ball chain          |    |    | with ball chain |    |    |                  | C                                    | C <sub>0</sub> |  |  |  |  |
| FNS  |                              |               |    |    |                |   |   |                             |    |    |                 |    |    |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 15   | R2001 1                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 0.20             | 5 100                                | 9 300          | 63                                                                                  | 90                                                                                  | 34                                                                                  | 49                                                                                  |
|      |                              |               | 1  |    | 4              | 3 | 2 | 04                          | 05 | 0X | 06              | 07 | 0W |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|      |                              |               |    | 2  | –              | 3 | 2 | 04                          | –  | 0X | 06              | –  | 0W |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 20   | R2001 8                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 0.45             | 12 300                               | 16 900         | 205                                                                                 | 215                                                                                 | 110                                                                                 | 115                                                                                 |
|      |                              |               | 1  |    | 4              | 3 | 2 | 04                          | 05 | 0X | 06              | 07 | 0W |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|      |                              |               |    | 2  | –              | 3 | 2 | 04                          | –  | 0X | 06              | –  | 0W |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 25   | R2001 2                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 0.65             | 15 000                               | 21 000         | 270                                                                                 | 295                                                                                 | 150                                                                                 | 165                                                                                 |
|      |                              |               | 1  |    | 4              | 3 | 2 | 04                          | 05 | 0X | 06              | 07 | 0W |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|      |                              |               |    | 2  | –              | 3 | 2 | 04                          | –  | 0X | 06              | –  | 0W |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 30   | R2001 7                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 1.10             | 20 800                               | 28 700         | 460                                                                                 | 500                                                                                 | 245                                                                                 | 265                                                                                 |
|      |                              |               | 1  |    | 4              | 3 | 2 | 04                          | 05 | 0X | 06              | 07 | 0W |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|      |                              |               |    | 2  | –              | 3 | 2 | 04                          | –  | 0X | 06              | –  | 0W |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 35   | R2001 3                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 1.60             | 27 600                               | 37 500         | 760                                                                                 | 805                                                                                 | 375                                                                                 | 390                                                                                 |
|      |                              |               | 1  |    | 4              | 3 | 2 | 04                          | 05 | 0X | 06              | 07 | 0W |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|      |                              |               |    | 2  | –              | 3 | 2 | 04                          | –  | 0X | 06              | –  | 0W |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| FLS  |                              |               |    |    |                |   |   |                             |    |    |                 |    |    |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 15   | R2002 1                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 0.30             | 8 500                                | 14 000         | 82                                                                                  | 132                                                                                 | 64                                                                                  | 104                                                                                 |
|      |                              |               | 1  |    | 4              | 3 | 2 | 04                          | 05 | 0X | 06              | 07 | 0W |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|      |                              |               |    | 2  | –              | 3 | 2 | 04                          | –  | 0X | 06              | –  | 0W |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 20   | R2002 8                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 0.55             | 16 000                               | 24 400         | 265                                                                                 | 310                                                                                 | 190                                                                                 | 230                                                                                 |
|      |                              |               | 1  |    | 4              | 3 | 2 | 04                          | 05 | 0X | 06              | 07 | 0W |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|      |                              |               |    | 2  | –              | 3 | 2 | 04                          | –  | 0X | 06              | –  | 0W |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 25   | R2002 2                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 0.90             | 20 000                               | 31 600         | 365                                                                                 | 450                                                                                 | 290                                                                                 | 350                                                                                 |
|      |                              |               | 1  |    | 4              | 3 | 2 | 04                          | 05 | 0X | 06              | 07 | 0W |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|      |                              |               |    | 2  | –              | 3 | 2 | 04                          | –  | 0X | 06              | –  | 0W |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 30   | R2002 7                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 1.50             | 26 300                               | 40 100         | 590                                                                                 | 695                                                                                 | 420                                                                                 | 495                                                                                 |
|      |                              |               | 1  |    | 4              | 3 | 2 | 04                          | 05 | 0X | 06              | 07 | 0W |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|      |                              |               |    | 2  | –              | 3 | 2 | 04                          | –  | 0X | 06              | –  | 0W |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 35   | R2002 3                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 2.25             | 36 500                               | 56 200         | 1 025                                                                               | 1 210                                                                               | 710                                                                                 | 840                                                                                 |
|      |                              |               | 1  |    | 4              | 3 | 2 | 04                          | 05 | 0X | 06              | 07 | 0W |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|      |                              |               |    | 2  | –              | 3 | 2 | 04                          | –  | 0X | 06              | –  | 0W |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| FKS  |                              |               |    |    |                |   |   |                             |    |    |                 |    |    |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 15   | R2000 1                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 0.15             | 4 500                                | 5 600          | 44                                                                                  | 55                                                                                  | 16                                                                                  | 19                                                                                  |
|      |                              |               | 1  |    | 4              | 3 | – | 04                          | 05 | 0X | 06              | 07 | 0W |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|      |                              |               |    | –  | –              | – | – | –                           | –  | –  | –               | –  | –  |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 20   | R2000 8                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 0.30             | 8 200                                | 9 400          | 125                                                                                 | 115                                                                                 | 45                                                                                  | 40                                                                                  |
|      |                              |               | 1  |    | 4              | 3 | – | 04                          | 05 | 0X | 06              | 07 | 0W |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|      |                              |               |    | –  | –              | – | – | –                           | –  | –  | –               | –  | –  |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 25   | R2000 2                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 0.50             | 10 500                               | 12 600         | 195                                                                                 | 180                                                                                 | 70                                                                                  | 65                                                                                  |
|      |                              |               | 1  |    | 4              | 3 | – | 04                          | 05 | 0X | 06              | 07 | 0W |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|      |                              |               |    | –  | –              | – | – | –                           | –  | –  | –               | –  | –  |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 30   | R2000 7                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 0.80             | 14500                                | 17 200         | 320                                                                                 | 295                                                                                 | 110                                                                                 | 105                                                                                 |
|      |                              |               | 1  |    | 4              | 3 | – | 04                          | 05 | 0X | 06              | 07 | 0W |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|      |                              |               |    | –  | –              | – | – | –                           | –  | –  | –               | –  | –  |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 35   | R2000 3                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 1.20             | 19 300                               | 22 400         | 545                                                                                 | 485                                                                                 | 170                                                                                 | 150                                                                                 |
|      |                              |               | 1  |    | 4              | 3 | – | 04                          | 05 | 0X | 06              | 07 | 0W |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|      |                              |               |    | –  | –              | – | – | –                           | –  | –  | –               | –  | –  |                  |                                      |                |                                                                                     |                                                                                     |                                                                                     |                                                                                     |

**Ordering example**

Options:

- ▶ Ball runner block BSHP Resist NR II, SKS
- ▶ Size 30
- ▶ Preload class C1
- ▶ Accuracy class H
- ▶ With standard seal, without ball chain

Material number: R2010 713 04

**Preload classes**

- C0 = Without preload (clearance)
- C1 = Moderate preload
- C2 = Average preload

**Seals**

- SS = Standard seal
- LS = Low-friction seal
- DS = Double-lip seal

**Key**

- Gray numbers = No preferred variants/combinations (partially longer delivery times)

| Size  | Ball runner blocks with size | Preload class |    |    | Accuracy class |   |   | Seals on ball runner blocks |    |    |                 |    |    | Mass (kg)<br>m | Load capacities <sup>2)</sup><br>(N) |                | Load moments <sup>2)</sup> (Nm) |                 |                |                 |
|-------|------------------------------|---------------|----|----|----------------|---|---|-----------------------------|----|----|-----------------|----|----|----------------|--------------------------------------|----------------|---------------------------------|-----------------|----------------|-----------------|
|       |                              | C0            | C1 | C2 | N              | H | P | without ball chain          |    |    | with ball chain |    |    |                | C                                    | C <sub>0</sub> | M <sub>t</sub>                  | M <sub>t0</sub> | M <sub>L</sub> | M <sub>L0</sub> |
| SNS   |                              |               |    |    |                |   |   |                             |    |    |                 |    |    |                |                                      |                |                                 |                 |                |                 |
| 15    | R2011 1                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 0.15           | 5 100                                | 9 300          | 63                              | 90              | 34             | 49              |
|       |                              |               | 1  |    | 4              | 3 | 2 | 04                          | 05 | 0X | 06              | 07 | 0W |                |                                      |                |                                 |                 |                |                 |
|       |                              |               |    | 2  | –              | 3 | 2 | 04                          | –  | 0X | 06              | –  | 0W |                |                                      |                |                                 |                 |                |                 |
| 20    | R2011 8                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 0.35           | 12 300                               | 16 900         | 205                             | 215             | 110            | 115             |
|       |                              |               | 1  |    | 4              | 3 | 2 | 04                          | 05 | 0X | 06              | 07 | 0W |                |                                      |                |                                 |                 |                |                 |
|       |                              |               |    | 2  | –              | 3 | 2 | 04                          | –  | 0X | 06              | –  | 0W |                |                                      |                |                                 |                 |                |                 |
| 25    | R2011 2                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 0.50           | 15 000                               | 21 000         | 270                             | 295             | 150            | 165             |
|       |                              |               | 1  |    | 4              | 3 | 2 | 04                          | 05 | 0X | 06              | 07 | 0W |                |                                      |                |                                 |                 |                |                 |
|       |                              |               |    | 2  | –              | 3 | 2 | 04                          | –  | 0X | 06              | –  | 0W |                |                                      |                |                                 |                 |                |                 |
| 30    | R2011 7                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 0.85           | 20 800                               | 28 700         | 460                             | 500             | 245            | 265             |
|       |                              |               | 1  |    | 4              | 3 | 2 | 04                          | 05 | 0X | 06              | 07 | 0W |                |                                      |                |                                 |                 |                |                 |
|       |                              |               |    | 2  | –              | 3 | 2 | 04                          | –  | 0X | 06              | –  | 0W |                |                                      |                |                                 |                 |                |                 |
| 35    | R2011 3                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 1.25           | 27 600                               | 37 500         | 760                             | 805             | 375            | 390             |
|       |                              |               | 1  |    | 4              | 3 | 2 | 04                          | 05 | 0X | 06              | 07 | 0W |                |                                      |                |                                 |                 |                |                 |
|       |                              |               |    | 2  | –              | 3 | 2 | 04                          | –  | 0X | 06              | –  | 0W |                |                                      |                |                                 |                 |                |                 |
| SLS   |                              |               |    |    |                |   |   |                             |    |    |                 |    |    |                |                                      |                |                                 |                 |                |                 |
| 15    | R2012 1                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 0.20           | 8 500                                | 14 000         | 82                              | 132             | 64             | 104             |
|       |                              |               | 1  |    | 4              | 3 | 2 | 04                          | 05 | 0X | 06              | 07 | 0W |                |                                      |                |                                 |                 |                |                 |
|       |                              |               |    | 2  | –              | 3 | 2 | 04                          | –  | 0X | 06              | –  | 0W |                |                                      |                |                                 |                 |                |                 |
| 20    | R2012 8                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 0.45           | 16 000                               | 24 400         | 265                             | 310             | 190            | 230             |
|       |                              |               | 1  |    | 4              | 3 | 2 | 04                          | 05 | 0X | 06              | 07 | 0W |                |                                      |                |                                 |                 |                |                 |
|       |                              |               |    | 2  | –              | 3 | 2 | 04                          | –  | 0X | 06              | –  | 0W |                |                                      |                |                                 |                 |                |                 |
| 25    | R2012 2                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 0.65           | 20 000                               | 31 600         | 365                             | 450             | 290            | 350             |
|       |                              |               | 1  |    | 4              | 3 | 2 | 04                          | 05 | 0X | 06              | 07 | 0W |                |                                      |                |                                 |                 |                |                 |
|       |                              |               |    | 2  | –              | 3 | 2 | 04                          | –  | 0X | 06              | –  | 0W |                |                                      |                |                                 |                 |                |                 |
| 30    | R2012 7                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 1.10           | 26 300                               | 40 100         | 590                             | 695             | 420            | 495             |
|       |                              |               | 1  |    | 4              | 3 | 2 | 04                          | 05 | 0X | 06              | 07 | 0W |                |                                      |                |                                 |                 |                |                 |
|       |                              |               |    | 2  | –              | 3 | 2 | 04                          | –  | 0X | 06              | –  | 0W |                |                                      |                |                                 |                 |                |                 |
| 35    | R2012 3                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 1.70           | 36 500                               | 56 200         | 1 025                           | 1 210           | 710            | 840             |
|       |                              |               | 1  |    | 4              | 3 | 2 | 04                          | 05 | 0X | 06              | 07 | 0W |                |                                      |                |                                 |                 |                |                 |
|       |                              |               |    | 2  | –              | 3 | 2 | 04                          | –  | 0X | 06              | –  | 0W |                |                                      |                |                                 |                 |                |                 |
| SKS   |                              |               |    |    |                |   |   |                             |    |    |                 |    |    |                |                                      |                |                                 |                 |                |                 |
| 15    | R2010 1                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 0.10           | 4 500                                | 5 600          | 44                              | 55              | 16             | 19              |
|       |                              |               | 1  |    | 4              | 3 | – | 04                          | 05 | 0X | 06              | 07 | 0W |                |                                      |                |                                 |                 |                |                 |
|       |                              |               |    | –  | –              | – | – | –                           | –  | –  | –               | –  | –  |                |                                      |                |                                 |                 |                |                 |
| 20    | R2010 8                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 0.25           | 8 200                                | 9 400          | 125                             | 115             | 45             | 40              |
|       |                              |               | 1  |    | 4              | 3 | – | 04                          | 05 | 0X | 06              | 07 | 0W |                |                                      |                |                                 |                 |                |                 |
|       |                              |               |    | –  | –              | – | – | –                           | –  | –  | –               | –  | –  |                |                                      |                |                                 |                 |                |                 |
| 25    | R2010 2                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 0.35           | 10 500                               | 12 600         | 195                             | 180             | 70             | 65              |
|       |                              |               | 1  |    | 4              | 3 | – | 04                          | 05 | 0X | 06              | 07 | 0W |                |                                      |                |                                 |                 |                |                 |
|       |                              |               |    | –  | –              | – | – | –                           | –  | –  | –               | –  | –  |                |                                      |                |                                 |                 |                |                 |
| 30    | R2010 7                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 0.60           | 14 500                               | 17 200         | 320                             | 295             | 110            | 105             |
|       |                              |               | 1  |    | 4              | 3 | – | 04                          | 05 | 0X | 06              | 07 | 0W |                |                                      |                |                                 |                 |                |                 |
|       |                              |               |    | –  | –              | – | – | –                           | –  | –  | –               | –  | –  |                |                                      |                |                                 |                 |                |                 |
| 35    | R2010 3                      | 9             |    |    | 4              | 3 | – | 04                          | 05 | –  | 06              | 07 | –  | 0.90           | 19 300                               | 22 400         | 545                             | 485             | 170            | 150             |
|       |                              |               | 1  |    | 4              | 3 | – | 04                          | 05 | 0X | 06              | 07 | 0W |                |                                      |                |                                 |                 |                |                 |
|       |                              |               |    | –  | –              | – | – | –                           | –  | –  | –               | –  | –  |                |                                      |                |                                 |                 |                |                 |
| E.g.: | R2010 7                      | 1             |    |    | 3              |   |   | 04                          |    |    |                 |    |    |                |                                      |                |                                 |                 |                |                 |

1) Only for accuracy classes N and H

2) Load capacities and load moments for ball runner block **without** ball chain. Load capacities and load moments for ball runner block **with** ball chain  14 Determination of the dynamic load capacities and load moments is based on a travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** by 1.26 according to the table.

#### Note

Dimensions, dimension drawing see standard ball runner block BSHP

Product description

General notes on the ball runner block Resist CR

- ▶ For material numbers, please refer to the following pages.
- ▶ Dimensions, dimension drawing, dynamic characteristics, load capacities, rigidity and moments see corresponding standard ball runner blocks made of steel
- ▶ Steel ball runner block body with corrosion-resistant coating, matte-silver finish, hard chrome plated.
- ▶ Pre-lubricated

Depending on the process, areas of the product may have a very thin to minimal layer thickness (e.g. bores, slots, undercuts...)

For ball runner blocks and ball guide rails Resist CR, matte-silver, hard chrome plated, deviating tolerances of the dimensions H and A<sub>3</sub> are to be observed (see "Accuracy classes and their tolerances").

Recommended ball runner blocks for ball guide rails Resist CR of accuracy class H and preload class C0 and C1

Recommended ball runner blocks

Sizes 15 - 65

- ▶ Accuracy class H
- ▶ Preload class C0

Recommended ball runner blocks

Sizes 30 - 65

- ▶ Accuracy class H
- ▶ Preload class C1

Definition of the format of ball runner blocks

| Criterion | Designation                | Code (example) |   |   |
|-----------|----------------------------|----------------|---|---|
|           |                            | F              | N | S |
| Width     | Flange <b>(F)</b>          | F              |   |   |
|           | Slimline <b>(S)</b>        | S              |   |   |
|           | Wide <b>(B)</b>            | B              |   |   |
|           | Compact <b>(C)</b>         | C              |   |   |
| Length    | Normal <b>(N)</b>          |                | N |   |
|           | Long <b>(L)</b>            |                | L |   |
|           | Short <b>(K)</b>           |                | K |   |
| Height    | Standard height <b>(S)</b> |                |   | S |
|           | High <b>(H)</b>            |                |   | H |
|           | Low <b>(N)</b>             |                |   | N |



Ball chain (optional)


- ▶ Optimized noise level

## Overview of formats

### Standard ball runner blocks<sup>1)</sup> BSHP up to size 45


**FNS**

R1651 ... 7.




**FLS**

R1653 ... 7.



**SNS**

R1622 ... 7.




**SLS**

R1623 ... 7.



**SNH**

R1621 ... 7.



**SLH**

R1624 ... 7.



**FNN**

R1693 ... 6.<sup>2)</sup>



**FKN**

R1663 ... 6.<sup>2)</sup>



**SNN**

R1694 ... 6.<sup>2)</sup>



**SKN**


R1664 ... 6.<sup>2)</sup>



### Heavy-duty ball runner blocks<sup>2)</sup> BSHP from size 55

**FNS**

R1651 ... 6.




**FLS**

R1653 ... 6.



**SNS**

R1622 ... 6.




**SLS**

R1623 ... 6.



**SNH**

R1621 ... 6.



**SLH**


R1624 ... 6.



### Super ball runner blocks<sup>2)</sup>


**FKS**

R1661 ... 7.



**SKS**

R1662 ... 7.



1) With ball chain

2) Without ball chain



## FNS, FLS, SNS, SLS, SNH, SLH, FNN, FKN, SNN, SKN, FKS, SKS

**Standard ball runner blocks BSHP**

| Format | Size    | Ball runner blocks with size | Preload class |    | Accuracy class | Seals on ball runner blocks |                    |    |    |                 |    |
|--------|---------|------------------------------|---------------|----|----------------|-----------------------------|--------------------|----|----|-----------------|----|
|        |         |                              | C0            | C1 |                | H                           | without ball chain |    |    | with ball chain |    |
|        |         |                              |               |    |                | SS                          | LS                 | DS | SS | LS              | DS |
| FNS    | 45      | R1651 4                      | 9             | 1  | 3              | 70                          | –                  | –  | 72 | –               | –  |
|        |         |                              |               |    | 3              | 70                          | –                  | 7Z | 72 | –               | 7Y |
|        | E.g.:   | R1651 4                      |               | 1  | 3              | 70                          |                    |    |    |                 |    |
| FLS    | 45      | R1653 4                      | 9             | 1  | 3              | 70                          | –                  | –  | 72 | –               | –  |
|        |         |                              |               |    | 3              | 70                          | –                  | 7Z | 72 | –               | 7Y |
| SNS    | 45      | R1622 4                      | 9             | 1  | 3              | 70                          | –                  | –  | 72 | –               | –  |
|        |         |                              |               |    | 3              | 70                          | –                  | 7Z | 72 | –               | 7Y |
| SLS    | 45      | R1623 4                      | 9             | 1  | 3              | 70                          | –                  | –  | 72 | –               | –  |
|        |         |                              |               |    | 3              | 70                          | –                  | 7Z | 72 | –               | 7Y |
| SNH    | 15      | R1621 1                      | 9             | –  | 3              | 70                          | 71                 | –  | 72 | 73              | –  |
|        | 25      | R1621 2                      | 9             | –  | 3              | 70                          | 71                 | –  | 72 | 73              | –  |
|        | 30      | R1621 7                      | 9             |    | 3              | 70                          | 71                 | –  | 72 | 73              | –  |
|        |         |                              |               | 1  |                | 70                          | 71                 | 7Z | 72 | 73              | 7Y |
|        | 35      | R1621 3                      | 9             |    | 3              | 70                          | 71                 | –  | 72 | 73              | –  |
|        |         |                              |               | 1  |                | 70                          | 71                 | 7Z | 72 | 73              | 7Y |
| 45     | R1621 4 | 9                            | 1             | 3  | 70             | –                           | –                  | 72 | –  | –               |    |
|        |         |                              |               |    |                | 70                          | –                  | 7Z | 72 | –               | 7Y |
| SLH    | 25      | R1624 2                      | 9             | –  | 3              | 70                          | 71                 | –  | 72 | 73              | –  |
|        | 30      | R1624 7                      | 9             |    | 3              | 70                          | 71                 | –  | 72 | 73              | –  |
|        |         |                              |               | 1  |                | 70                          | 71                 | 7Z | 72 | 73              | 7Y |
|        | 35      | R1624 3                      | 9             |    | 3              | 70                          | 71                 | –  | 72 | 73              | –  |
|        |         |                              |               | 1  |                | 70                          | 71                 | 7Z | 72 | 73              | 7Y |
| 45     | R1624 4 | 9                            | 1             | 3  | 70             | –                           | –                  | 72 | –  | –               |    |
|        |         |                              |               |    |                | 70                          | –                  | 7Z | 72 | –               | 7Y |
| FNN    | 20      | R1693 8                      | 9             | –  | 3              | 60                          | –                  | –  | –  | –               | –  |
|        | 25      | R1693 2                      | 9             | –  | 3              | 60                          | –                  | –  | –  | –               | –  |
| FKN    | 20      | R1663 8                      | 9             | –  | 3              | 60                          | –                  | –  | –  | –               | –  |
|        | 25      | R1663 2                      | 9             | –  | 3              | 60                          | –                  | –  | –  | –               | –  |
| SNN    | 20      | R1694 8                      | 9             | –  | 3              | 60                          | –                  | –  | –  | –               | –  |
|        | 25      | R1694 2                      | 9             | –  | 3              | 60                          | –                  | –  | –  | –               | –  |
| SKN    | 20      | R1664 8                      | 9             | –  | 3              | 60                          | –                  | –  | –  | –               | –  |
|        | 25      | R1664 2                      | 9             | –  | 3              | 60                          | –                  | –  | –  | –               | –  |

**Ordering example**

Options:

- ▶ Ball runner block BSHP Resist CR, FNS
- ▶ Size 45
- ▶ Preload class C1
- ▶ Accuracy class H
- ▶ With standard seal, without ball chain

Material number: R1651 413 70

**Preload classes**

C0 = Without preload (clearance)  
C1 = Moderate preload

**Seals**

SS = Standard seal  
LS = Low-friction seal  
DS = Double-lip seal

**Key**

Gray numbers  
= No preferred variants/combinations (partially longer delivery times)



**Heavy-duty BSHP ball runner blocks**

| Format     | Size      | Ball runner blocks with size | Preload class |    | Accuracy class | Seals on ball runner blocks without ball chain |    |
|------------|-----------|------------------------------|---------------|----|----------------|------------------------------------------------|----|
|            |           |                              | C0            | C1 |                | H                                              | SS |
| <b>FNS</b> | <b>55</b> | R1651 5                      | 9             | 1  | 3              |                                                | 60 |
|            | <b>65</b> | R1651 6                      | 9             | 1  | 3              |                                                | 60 |
| <b>FLS</b> | <b>55</b> | R1653 5                      | 9             | 1  | 3              |                                                | 60 |
|            | <b>65</b> | R1653 6                      | 9             | 1  | 3              |                                                | 60 |
| <b>SNS</b> | <b>55</b> | R1622 5                      | 9             | 1  | 3              |                                                | 60 |
|            | <b>65</b> | R1622 6                      | 9             | 1  | 3              |                                                | 60 |
| <b>SLS</b> | <b>55</b> | R1623 5                      | 9             | 1  | 3              |                                                | 60 |
|            | <b>65</b> | R1623 6                      | 9             | 1  | 3              |                                                | 60 |
| <b>SNH</b> | <b>55</b> | R1621 5                      | 9             | 1  | 3              |                                                | 60 |
| <b>SLH</b> | <b>55</b> | R1624 5                      | 9             | 1  | 3              |                                                | 60 |

**Super ball runner blocks**

| Format     | Size      | Ball runner blocks with size | Preload class |    | Accuracy class | Seals on ball runner blocks without ball chain |    |    |    |
|------------|-----------|------------------------------|---------------|----|----------------|------------------------------------------------|----|----|----|
|            |           |                              | C0            | C1 |                | H                                              | SS | LS | DS |
| <b>FKS</b> | <b>15</b> | R1661 1                      | 9             | –  | 3              |                                                | 70 | 71 | –  |
|            | <b>20</b> | R1661 8                      | 9             | –  | 3              |                                                | 70 | 71 | –  |
|            | <b>25</b> | R1661 2                      | 9             | –  | 3              |                                                | 70 | 71 | –  |
|            | <b>30</b> | R1661 7                      | 9             | 1  | 3              |                                                | 70 | 71 | –  |
|            |           |                              |               |    | 3              |                                                | 70 | 71 | 7Z |
|            | <b>35</b> | R1661 3                      | 9             | 1  | 3              |                                                | 70 | 71 | –  |
| <b>SKS</b> | <b>15</b> | R1662 1                      | 9             | –  | 3              |                                                | 70 | 71 | –  |
|            | <b>20</b> | R1662 8                      | 9             | –  | 3              |                                                | 70 | 71 | –  |
|            | <b>25</b> | R1662 2                      | 9             | –  | 3              |                                                | 70 | 71 | –  |
|            | <b>30</b> | R1662 7                      | 9             | 1  | 3              |                                                | 70 | 71 | –  |
|            |           |                              |               |    | 3              |                                                | 70 | 71 | 7Z |
|            | <b>35</b> | R1662 3                      | 9             | 1  | 3              |                                                | 70 | 71 | –  |
|            |           |                              |               |    |                |                                                | 70 | 71 | 7Z |

**Note**

Dimensions, dimension drawing, load capacities, rigidity and moments see standard/heavy-duty ball runner block BSHP and super ball runner block.



# Product description

## Characteristic features

- ▶ Maximum rigidity in all directions of loading
- ▶ High torque load capacity

## Proven cover strip for the ball guide rail fastening bores

- ▶ **One** cover for all bore holes saves time and costs
- ▶ Made of corrosion-resistant spring steel as per DIN EN 10088
- ▶ Easy and safe during mounting
- ▶ Clip and secure

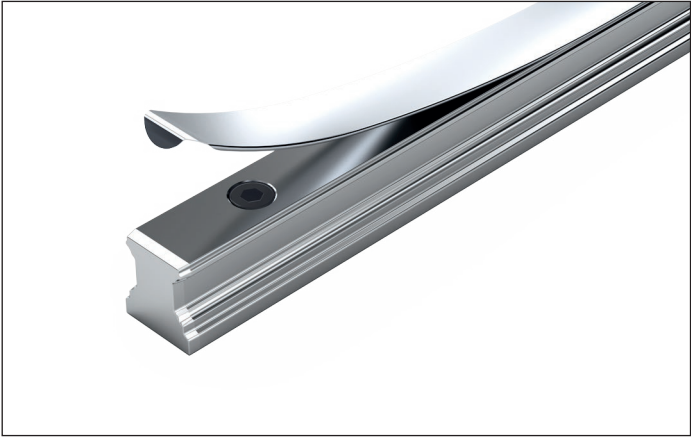

## Ball guide rails with cover strip and strip clamps made of aluminum

- ▶ Without end-face threaded holes (not required)




## Ball guide rails with cover strip and bolted plastic protective caps


- ▶ With threaded holes at the end faces



## Ball guide rails with plastic caps



## Ball guide rails with steel caps



## Ball guide rails for bolting from below

## Definition of the format of ball guide rails

| Criterion | Designation                | Code (example) |   |   |
|-----------|----------------------------|----------------|---|---|
|           |                            | S              | N | S |
| Width     | Slimline <b>(S)</b>        | S              |   |   |
|           | Wide <b>(B)</b>            | B              |   |   |
| Length    | Normal <b>(N)</b>          |                | N |   |
| Height    | Standard height <b>(S)</b> |                |   | S |
|           | Without groove <b>(O)</b>  |                |   | O |

# Ordering guide rails in the recommended rail lengths

## Ordering ball guide rails in the recommended rail lengths

The procedure shown in the following ordering examples applies to all ball guide rails. Recommended rail lengths are more cost effective.

| Options and material numbers |                           |                |   |   |    |    |                                                     |           |                |                                                                                     |                               |
|------------------------------|---------------------------|----------------|---|---|----|----|-----------------------------------------------------|-----------|----------------|-------------------------------------------------------------------------------------|-------------------------------|
| Size                         | Ball guide rail with size | Accuracy class |   |   |    |    | Number of partial sections, rail length L (mm), ... |           | Spacing T (mm) | Recommended rail length in accordance with formula $L = n_b \cdot T - 4 \text{ mm}$ | Maximum number of holes $n_b$ |
|                              |                           | N              | H | P | SP | UP | One-piece                                           | Composite |                |                                                                                     |                               |
| 15                           | R1605 13                  | 4              | 3 | 2 | 1  | 9  | 31, ...                                             | 3, ...    | 60             |                                                                                     | 64                            |
| 20                           | R1605 83                  | 4              | 3 | 2 | 1  | 9  | 31, ...                                             | 3, ...    | 60             |                                                                                     | 64                            |
| 25                           | R1605 23                  | 4              | 3 | 2 | 1  | 9  | 31, ...                                             | 3, ...    | 60             |                                                                                     | 64                            |
| 30                           | R1605 73                  | 4              | 3 | 2 | 1  | 9  | 31, ...                                             | 3, ...    | 80             |                                                                                     | 48                            |
| 35                           | R1605 33                  | 4              | 3 | 2 | 1  | 9  | 61, ...                                             | 6, ...    | 80             |                                                                                     | 48                            |
| 45                           | R1605 43                  | 4              | 3 | 2 | 1  | 9  | 61, ...                                             | 6, ...    | 105            |                                                                                     | 36                            |
| 55                           | R1605 53                  | 4              | 3 | 2 | 1  | 9  | 61, ...                                             | 6, ...    | 120            |                                                                                     | 32                            |
| 65                           | R1605 63                  | 4              | 3 | 2 | 1  | 9  | 61, ...                                             | 6, ...    | 150            |                                                                                     | 25                            |
| E.g.:                        | R1605 73                  | 3              |   |   |    |    | 31, 1676                                            |           |                |                                                                                     |                               |

Excerpt from table with material numbers and recommended rail lengths for ordering example

## From the desired rail length to the recommended length

$$L = \left( \frac{L_W}{T} \right)^* \cdot T - 4$$


\* Round up quotient  $L_W/T$  to the nearest whole number!

## Calculation example

$$L = \left( \frac{1660}{80 \text{ mm}} \right) \cdot 80 \text{ mm} - 4 \text{ mm}$$

$$L = 21 \cdot 80 \text{ mm} - 4 \text{ mm}$$

$$L = 1676 \text{ mm}$$

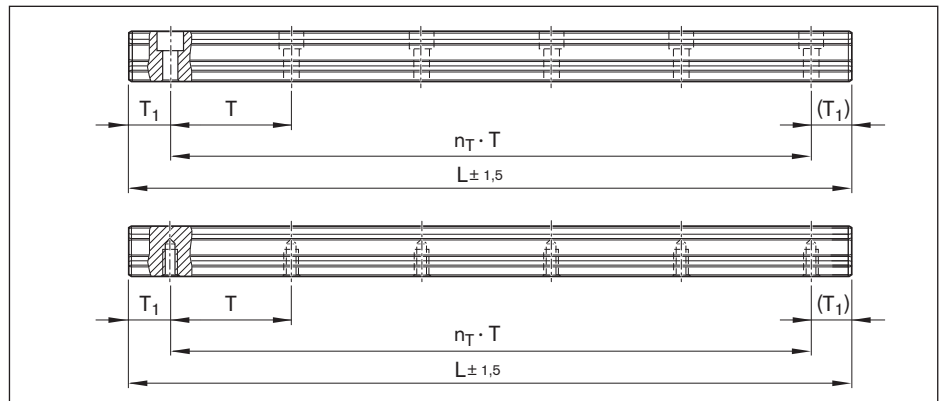

Basis: Number of holes

$$L = n_B \cdot T - 4 \text{ mm}$$

Basis: Number of spaces

$$L = n_T \cdot T + 2 \cdot T_{1S}$$

L = Recommended rail length (mm)

$L_W$  = Desired rail length (mm)

T = Spacing (mm)

$T_{1S}$  = Preferred dimension (mm)

$n_B$  = Number of holes (–)

$n_T$  = Number of spaces (–)

## Notes on ordering examples

If preferred dimension  $T_{1S}$  is not used, it is possible to choose between:

- ▶ Select end spacing  $T_1$  between  $T_{1S}$  and  $T_{1 \min}$
- ▶ As an alternative, it is possible to choose end spacings  $T_1$  to  $T_{1 \max}$ .

## Ordering example 1 (to $L_{\max}$ )

- ▶ Ball guide rail SNS size 30 with cover strip and strip clamps
- ▶ Accuracy class H
- ▶ Calculated rail length 1676 mm, (20 · T, preferred dimension  $T_{1S} = 38 \text{ mm}$ ; number of holes  $n_B = 21$ )

## Ordering data

Material number, rail length (mm)

$T_1 / n_T \cdot T / T_1$  (mm)

**R1605 733 31, 1676 mm**

**38 / 20 · 80 / 38 mm**

## Ordering example 2 (above $L_{\max}$ )

- ▶ Ball guide rail SNS size 30 with cover strip and strip clamps
- ▶ Accuracy class H
- ▶ Calculated rail length 5116 mm, 2 partial sections (63 · T, preferred dimension  $T_{1S} = 38 \text{ mm}$ ; number of holes  $n_B = 64$ )

## Ordering data

Material number with number of partial sections, rail length (mm)


$T_1 / n_T \cdot T / T_1$  (mm)

**R1605 733 32, 5116 mm**

**38 / 63 · 80 / 38 mm**

In the case of rail lengths above  $L_{\max}$ , partial sections approved by Rexroth are joined together.

## SNS/SNO with cover strip and strip clamps

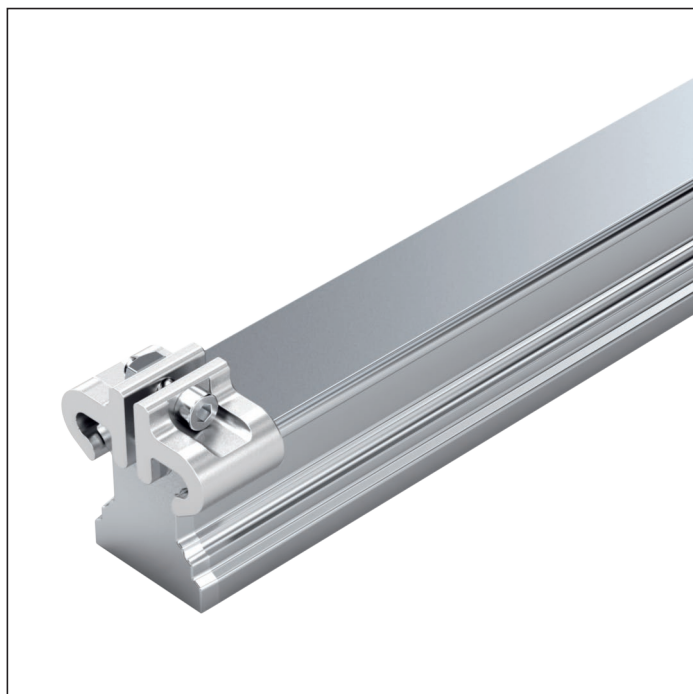

### R1605 .3. .. / R1605 .B. ..

**For bolting from above, with cover strip made of corrosion-resistant spring steel per EN 10088 and strip clamps made of aluminum (without end-face thread bore hole)**

#### Notes

- ▶ Secure the cover strip!
- ▶ Strip clamps included in scope of delivery.
- ▶ Observe the instruction for mounting!  
Please request the "Mounting instructions for ball rail systems" and "Mounting instructions for cover strip".
- ▶ Composite ball guide rail also available.

#### Further ball guide rails SNS/SNO and accessories available.

- ▶ Cover strip, protective caps (see Accessories for ball guide rails)

**Ball guide rails SNO R1605 .B. .. with smooth base area for mounting surfaces from cast mineral parts**  
**In size 25-35 and available in accuracy class P and SP.**

### Options and material numbers

| Size  | Ball guide rail with size | Accuracy class |   |   |    |    | Number of partial sections, rail length L (mm), .... |           | Spacing T (mm) | Recommended rail length in accordance with formula $L = n_B \cdot T - 4 \text{ mm}$ |    |
|-------|---------------------------|----------------|---|---|----|----|------------------------------------------------------|-----------|----------------|-------------------------------------------------------------------------------------|----|
|       |                           | N              | H | P | SP | UP | One-piece                                            | Composite |                | Maximum number of holes $n_B$                                                       |    |
| 15    | R1605 13                  | 4              | 3 | 2 | 1  | 9  | 31, ....                                             | 3., ....  | 60             |                                                                                     | 64 |
| 20    | R1605 83                  | 4              | 3 | 2 | 1  | 9  | 31, ....                                             | 3., ....  | 60             |                                                                                     | 64 |
| 25    | R1605 23                  | 4              | 3 | 2 | 1  | 9  | 31, ....                                             | 3., ....  | 60             |                                                                                     | 64 |
| 30    | R1605 73                  | 4              | 3 | 2 | 1  | 9  | 31, ....                                             | 3., ....  | 80             |                                                                                     | 48 |
| 35    | R1605 33                  | 4              | 3 | 2 | 1  | 9  | 61, ....                                             | 6., ....  | 80             |                                                                                     | 48 |
| 45    | R1605 43                  | 4              | 3 | 2 | 1  | 9  | 61, ....                                             | 6., ....  | 105            |                                                                                     | 36 |
| 55    | R1605 53                  | 4              | 3 | 2 | 1  | 9  | 61, ....                                             | 6., ....  | 120            |                                                                                     | 32 |
| 65    | R1605 63                  | 4              | 3 | 2 | 1  | 9  | 61, ....                                             | 6., ....  | 150            |                                                                                     | 25 |
| E.g.: | R1605 73                  |                | 3 |   |    |    | 31, 1676                                             |           |                |                                                                                     |    |

#### Ordering example 1 (to $L_{\max}$ )

Options:

- ▶ Ball guide rail SNS
- ▶ Size 30
- ▶ Accuracy class H
- ▶ One-piece
- ▶ Rail length  
L = 1676 mm

Material number: R1605  
733 31, 1676 mm

#### Ordering example 2 (above $L_{\max}$ )

Options:

- ▶ Ball guide rail SNS
- ▶ Size 30
- ▶ Accuracy class H
- ▶ **2 partial sections**
- ▶ Rail length  
L = 5116 mm


Material number:  
R1605 733 32, 5116 mm

#### Ordering example 3 (up to $L_{\max}$ , with smooth surface)

Options:

- ▶ Ball guide rail SNO
- ▶ Size 30
- ▶ Accuracy class H
- ▶ One-piece
- ▶ Rail length  
L = 1676 mm

Material number:  
R1605 7B3 31, 1676 mm

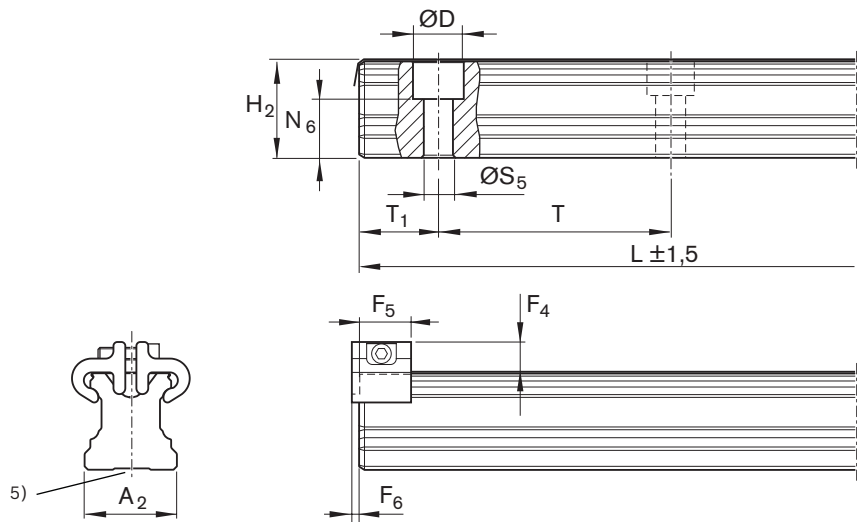

| Size | Dimensions (mm) |      |                              |                |                |                              |                                |                                |                |     |                    |                               |                    |      | Mass m<br>(kg/m) |
|------|-----------------|------|------------------------------|----------------|----------------|------------------------------|--------------------------------|--------------------------------|----------------|-----|--------------------|-------------------------------|--------------------|------|------------------|
|      | A <sub>2</sub>  | D    | F <sub>4</sub> <sup>3)</sup> | F <sub>5</sub> | F <sub>6</sub> | H <sub>2</sub> <sup>1)</sup> | L <sub>max</sub> <sup>2)</sup> | N <sub>6</sub> <sup>+0.5</sup> | S <sub>5</sub> | T   | T <sub>1 min</sub> | T <sub>1S</sub> <sup>4)</sup> | T <sub>1 max</sub> |      |                  |
| 15   | 15              | 7.4  | 7.3                          | 12             | 2.0            | 16.30                        | 3 836                          | 10.3                           | 4.5            | 60  | 12                 | 28.0                          | 50                 | 1.4  |                  |
| 20   | 20              | 9.4  | 7.1                          | 12             | 2.0            | 20.75                        | 3 836                          | 13.2                           | 6.0            | 60  | 13                 | 28.0                          | 50                 | 2.4  |                  |
| 25   | 23              | 11.0 | 8.2                          | 13             | 2.0            | 24.45                        | 3 836                          | 15.2                           | 7.0            | 60  | 13                 | 28.0                          | 50                 | 3.2  |                  |
| 30   | 28              | 15.0 | 8.7                          | 13             | 2.0            | 28.55                        | 3 836                          | 17.0                           | 9.0            | 80  | 16                 | 38.0                          | 68                 | 5.0  |                  |
| 35   | 34              | 15.0 | 11.7                         | 16             | 2.2            | 32.15                        | 3 836                          | 20.5                           | 9.0            | 80  | 16                 | 38.0                          | 68                 | 6.8  |                  |
| 45   | 45              | 20.0 | 12.5                         | 18             | 2.2            | 40.15                        | 3 776                          | 23.5                           | 14.0           | 105 | 18                 | 50.5                          | 89                 | 10.5 |                  |
| 55   | 53              | 24.0 | 14.0                         | 17             | 3.2            | 48.15                        | 3 836                          | 29.0                           | 16.0           | 120 | 20                 | 58.0                          | 102                | 16.2 |                  |
| 65   | 63              | 26.0 | 15.0                         | 17             | 3.2            | 60.15                        | 3 746                          | 38.5                           | 18.0           | 150 | 21                 | 73.0                          | 130                | 22.4 |                  |

- 1) Dimension H<sub>2</sub> with cover strip  
Size 15 with cover strip 0.1 mm  
Size 20 - 30 with cover strip 0.2 mm  
Size 35 - 65 with cover strip 0.3 mm
- 2) For size 20 - 45 in accuracy class N, H and P one-piece ball guide rail lengths are available for  
Size 20 - 25 to 5816 mm available on request.  
Size 30 - 35 to 5836 mm available on request.  
Size 45 to 5771 mm available on request.
- 3) Dimension H<sub>4</sub> with cover strip
- 4) Preferred dimension T<sub>1S</sub> with tolerances ±0.75 recommended.
- 5) Ball guide rails SNO with smooth base surface (without base groove).

## SNS/SNO with cover strip and protective caps

**R1605 .6. .. / R1605 .D. ..**

**For bolting from above, with cover strip made of corrosion-resistant spring steel per EN 10088 and screw-down plastic protective caps (with end-face thread bore hole)**

**Notes**

- ▶ Secure the cover strip!
- ▶ Protective caps with screws and washers are included in the scope of delivery.
- ▶ Observe the instruction for mounting!  
Please request the "Mounting instructions for ball rail systems" and "Mounting instructions for cover strip".
- ▶ Composite ball guide rail also available.

**Further ball guide rails SNS/SNO and accessories**

- ▶ Cover strip, protective caps (see Accessories for ball guide rails)

**Ball guide rails SNO R1605 .D. .. with smooth base area for mounting surfaces from cast mineral parts**  
**In size 25-35 and available in accuracy class P and SP.**

**Options and material numbers**

| Size         | Ball guide rail with size | Accuracy class |   |   |    |    | Number of partial sections, rail length L (mm), ... |           | Spacing T (mm) | Recommended rail length in accordance with formula $L = n_B \cdot T - 4 \text{ mm}$ |    |
|--------------|---------------------------|----------------|---|---|----|----|-----------------------------------------------------|-----------|----------------|-------------------------------------------------------------------------------------|----|
|              |                           | N              | H | P | SP | UP | One-piece                                           | Composite |                | Maximum number of holes $n_B$                                                       |    |
| 15           | R1605 16                  | 4              | 3 | 2 | 1  | 9  | 31, ...                                             | 3., ...   | 60             |                                                                                     | 64 |
| 20           | R1605 86                  | 4              | 3 | 2 | 1  | 9  | 31, ...                                             | 3., ...   | 60             |                                                                                     | 64 |
| 25           | R1605 26                  | 4              | 3 | 2 | 1  | 9  | 31, ...                                             | 3., ...   | 60             |                                                                                     | 64 |
| 30           | R1605 76                  | 4              | 3 | 2 | 1  | 9  | 31, ...                                             | 3., ...   | 80             |                                                                                     | 48 |
| 35           | R1605 36                  | 4              | 3 | 2 | 1  | 9  | 61, ...                                             | 6., ...   | 80             |                                                                                     | 48 |
| 45           | R1605 46                  | 4              | 3 | 2 | 1  | 9  | 61, ...                                             | 6., ...   | 105            |                                                                                     | 36 |
| 55           | R1605 56                  | 4              | 3 | 2 | 1  | 9  | 61, ...                                             | 6., ...   | 120            |                                                                                     | 32 |
| 65           | R1605 66                  | 4              | 3 | 2 | 1  | 9  | 61, ...                                             | 6., ...   | 150            |                                                                                     | 25 |
| <b>E.g.:</b> | R1605 76                  | 3              |   |   |    |    | 31, 1676                                            |           |                |                                                                                     |    |

**Ordering example 1  
(to  $L_{\max}$ )**

Options:

- ▶ Ball guide rail SNS
- ▶ Size 30
- ▶ Accuracy class H
- ▶ One-piece
- ▶ Rail length  
 $L = 1676 \text{ mm}$

Material number: R1605  
763 31, 1676 mm

**Ordering example 2  
(above  $L_{\max}$ )**

Options:

- ▶ Ball guide rail SNS
- ▶ Size 30
- ▶ Accuracy class H
- ▶ **2 partial sections**
- ▶ Rail length  
 $L = 5116 \text{ mm}$


Material number:  
R1605 763 **32**, 5116 mm

**Ordering example 3  
(up to  $L_{\max}$ , with smooth surface)**

Options:

- ▶ Ball guide rail SNO
- ▶ Size 30
- ▶ Accuracy class H
- ▶ One-piece
- ▶ Rail length  
 $L = 1676 \text{ mm}$

Material number:  
R1605 **7D3** 31, 1676 mm

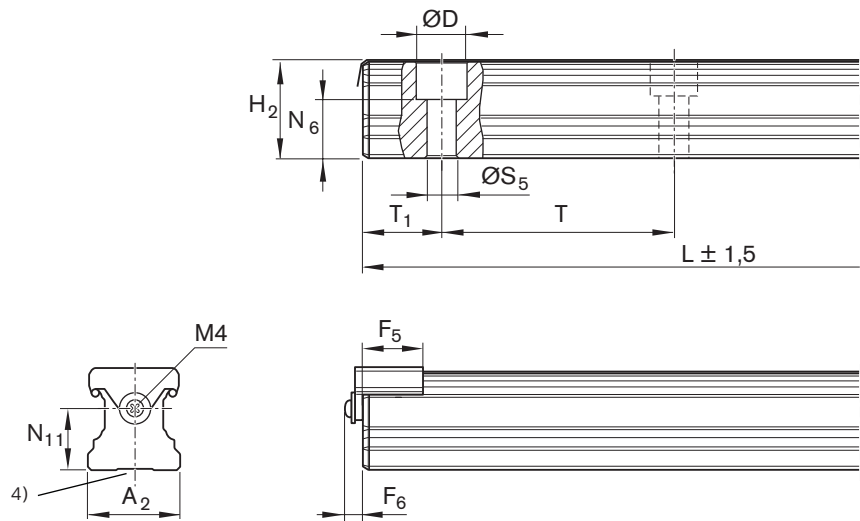

| Size | Dimensions (mm) |      |                |                |                              |                                |                                |                 |                |     |                                  |                               |                    |        | Mass m |
|------|-----------------|------|----------------|----------------|------------------------------|--------------------------------|--------------------------------|-----------------|----------------|-----|----------------------------------|-------------------------------|--------------------|--------|--------|
|      | A <sub>2</sub>  | D    | F <sub>5</sub> | F <sub>6</sub> | H <sub>2</sub> <sup>1)</sup> | L <sub>max</sub> <sup>2)</sup> | N <sub>6</sub> <sup>+0.5</sup> | N <sub>11</sub> | S <sub>5</sub> | T   | T <sub>1 min</sub> <sup>3)</sup> | T <sub>15</sub> <sup>5)</sup> | T <sub>1 max</sub> | (kg/m) |        |
| 15   | 15              | 7.4  | 14.0           | 6.5            | 16.30                        | 3 836                          | 10.3                           | 9.8             | 4.5            | 60  | 12                               | 28.0                          | 50                 | 1.4    |        |
| 20   | 20              | 9.4  | 14.0           | 6.5            | 20.75                        | 3 836                          | 13.2                           | 13.0            | 6.0            | 60  | 13                               | 28.0                          | 50                 | 2.4    |        |
| 25   | 23              | 11.0 | 15.2           | 6.5            | 24.45                        | 3 836                          | 15.2                           | 15.0            | 7.0            | 60  | 13                               | 28.0                          | 50                 | 3.2    |        |
| 30   | 28              | 15.0 | 15.2           | 7.0            | 28.55                        | 3 836                          | 17.0                           | 18.0            | 9.0            | 80  | 16                               | 38.0                          | 68                 | 5.0    |        |
| 35   | 34              | 15.0 | 18.0           | 7.0            | 32.15                        | 3 836                          | 20.5                           | 22.0            | 9.0            | 80  | 16                               | 38.0                          | 68                 | 6.8    |        |
| 45   | 45              | 20.0 | 20.0           | 7.0            | 40.15                        | 3 776                          | 23.5                           | 30.0            | 14.0           | 105 | 18                               | 50.5                          | 89                 | 10.5   |        |
| 55   | 53              | 24.0 | 20.0           | 7.0            | 48.15                        | 3 836                          | 29.0                           | 30.0            | 16.0           | 120 | 20                               | 58.0                          | 102                | 16.2   |        |
| 65   | 63              | 26.0 | 20.0           | 7.0            | 60.15                        | 3 746                          | 38.5                           | 40.0            | 18.0           | 150 | 21                               | 73.0                          | 130                | 22.4   |        |

- 1) Dimension H<sub>2</sub> with cover strip  
 Size 15 with cover strip 0.1 mm  
 Size 20 - 30 with cover strip 0.2 mm  
 Size 35 - 65 with cover strip 0.3 mm
- 2) For size 20 - 45 in accuracy class N, H and P one-piece ball guide rail lengths are available for  
 Size 20 - 25 to 5816 mm available on request.  
 Size 30 - 35 to 5836 mm available on request.  
 Size 45 to 5771 mm available on request.
- 3) For end spaces below T<sub>1min</sub>, no threaded holes in end faces possible. Secure the cover strip.
- 4) Ball guide rails SNO with smooth base surface (without base groove).
- 5) Preferred dimension T<sub>1S</sub> with tolerances ±0.75 recommended.

## SNS/SNO with plastic caps

**R1605 .0. .. / R1605 .C. ..****For bolting from above with plastic caps****Notes**

- ▶ Plastic caps included in scope of supply.
- ▶ Observe the instruction for mounting!  
Please request the "Mounting instructions for ball rail systems".

- ▶ Composite ball guide rail also available.

**Further ball guide rails SNS and accessories**

- ▶ Corrosion-resistant Resist CR ball guide rails and stainless-steel Resist NR ball guide rails
- ▶ Caps made of plastic see Accessories for ball guide rails

**Ball guide rails SNO R1605 .C. .. with smooth base area for mounting surfaces from cast mineral parts**  
In size 25-35 and available in accuracy class P and SP.

**Options and material numbers**

| Size  | Ball guide rail with size | Accuracy class |   |   |    |    | Number of partial sections, rail length L (mm), ... |           | Spacing T (mm) | Recommended rail length in accordance with formula $L = n_B \cdot T - 4 \text{ mm}$ |
|-------|---------------------------|----------------|---|---|----|----|-----------------------------------------------------|-----------|----------------|-------------------------------------------------------------------------------------|
|       |                           | N              | H | P | SP | UP | One-piece                                           | Composite |                | Maximum number of holes $n_B$                                                       |
| 15    | R1605 10                  | 4              | 3 | 2 | 1  | 9  | 31, ...                                             | 3, ...    | 60             | 64                                                                                  |
| 20    | R1605 80                  | 4              | 3 | 2 | 1  | 9  | 31, ...                                             | 3, ...    | 60             | 64                                                                                  |
| 25    | R1605 20                  | 4              | 3 | 2 | 1  | 9  | 31, ...                                             | 3, ...    | 60             | 64                                                                                  |
| 30    | R1605 70                  | 4              | 3 | 2 | 1  | 9  | 31, ...                                             | 3, ...    | 80             | 48                                                                                  |
| 35    | R1605 30                  | 4              | 3 | 2 | 1  | 9  | 31, ...                                             | 3, ...    | 80             | 48                                                                                  |
| 45    | R1605 40                  | 4              | 3 | 2 | 1  | 9  | 31, ...                                             | 3, ...    | 105            | 36                                                                                  |
| 55    | R1605 50                  | 4              | 3 | 2 | 1  | 9  | 31, ...                                             | 3, ...    | 120            | 32                                                                                  |
| 65    | R1605 60                  | 4              | 3 | 2 | 1  | 9  | 31, ...                                             | 3, ...    | 150            | 25                                                                                  |
| E.g.: | R1605 70                  | 3              |   |   |    |    | 31, 1676                                            |           |                |                                                                                     |

**Ordering example 1  
(to  $L_{\max}$ )**

Options:

- ▶ Ball guide rail SNS
- ▶ Size 30
- ▶ Accuracy class H
- ▶ One-piece
- ▶ Rail length  
 $L = 1676 \text{ mm}$

Material number:

R1605 703 31, 1676 mm

**Ordering example 2  
(above  $L_{\max}$ )**

Options:

- ▶ Ball guide rail SNS
- ▶ Size 30
- ▶ Accuracy class H
- ▶ **2 partial sections**
- ▶ Rail length  
 $L = 5116 \text{ mm}$

Material number:

R1605 703 32, 5116 mm

**Ordering example 3  
(up to  $L_{\max}$ , with smooth surface)**


Options:

- ▶ Ball guide rail SNO
- ▶ Size 30
- ▶ Accuracy class H
- ▶ One-piece
- ▶ Rail length  
 $L = 1676 \text{ mm}$

Material number:

R1605 7C3 31, 1676 mm




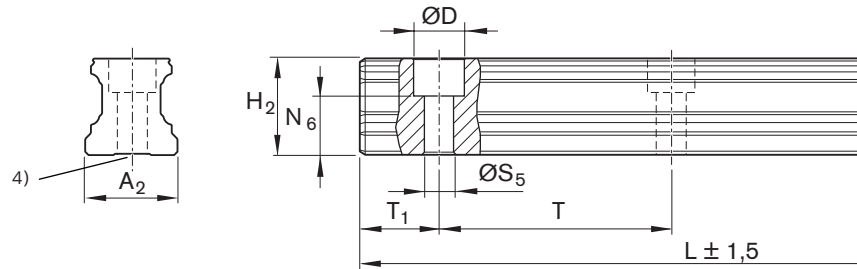

| Size      | Dimensions (mm) |      |                              |                                |                                |                |     |                    |                               |                    | Mass m<br>(kg/m) |
|-----------|-----------------|------|------------------------------|--------------------------------|--------------------------------|----------------|-----|--------------------|-------------------------------|--------------------|------------------|
|           | A <sub>2</sub>  | D    | H <sub>2</sub> <sup>1)</sup> | L <sub>max</sub> <sup>2)</sup> | N <sub>6</sub> <sup>±0.5</sup> | S <sub>5</sub> | T   | T <sub>1 min</sub> | T <sub>1S</sub> <sup>3)</sup> | T <sub>1 max</sub> |                  |
| <b>15</b> | 15              | 7.4  | 16.20                        | 3 836                          | 10.3                           | 4.5            | 60  | 10                 | 28.0                          | 50                 | 1.4              |
| <b>20</b> | 20              | 9.4  | 20.55                        | 3 836                          | 13.2                           | 6.0            | 60  | 10                 | 28.0                          | 50                 | 2.4              |
| <b>25</b> | 23              | 11.0 | 24.25                        | 3 836                          | 15.2                           | 7.0            | 60  | 10                 | 28.0                          | 50                 | 3.2              |
| <b>30</b> | 28              | 15.0 | 28.35                        | 3 836                          | 17.0                           | 9.0            | 80  | 12                 | 38.0                          | 68                 | 5.0              |
| <b>35</b> | 34              | 15.0 | 31.85                        | 3 836                          | 20.5                           | 9.0            | 80  | 12                 | 38.0                          | 68                 | 6.8              |
| <b>45</b> | 45              | 20.0 | 39.85                        | 3 776                          | 23.5                           | 14.0           | 105 | 16                 | 50.5                          | 89                 | 10.5             |
| <b>55</b> | 53              | 24.0 | 47.85                        | 3 836                          | 29.0                           | 16.0           | 120 | 18                 | 58.0                          | 102                | 16.2             |
| <b>65</b> | 63              | 26.0 | 59.85                        | 3 746                          | 38.5                           | 18.0           | 150 | 20                 | 73.0                          | 130                | 22.4             |

- 1) Dimension H<sub>2</sub> without cover strip
- 2) For size 20 - 45 in accuracy class N, H and P one-piece ball guide rail lengths are available for  
 Size 20 - 25 to 5816 mm available on request.  
 Size 30 - 35 to 5836 mm available on request.  
 Size 45 to 5771 mm available on request.
- 3) Preferred dimension T<sub>1S</sub> with tolerances ±0.75 recommended.
- 4) Ball guide rails SNO with smooth base surface (without base groove).

## SNS with caps made of steel

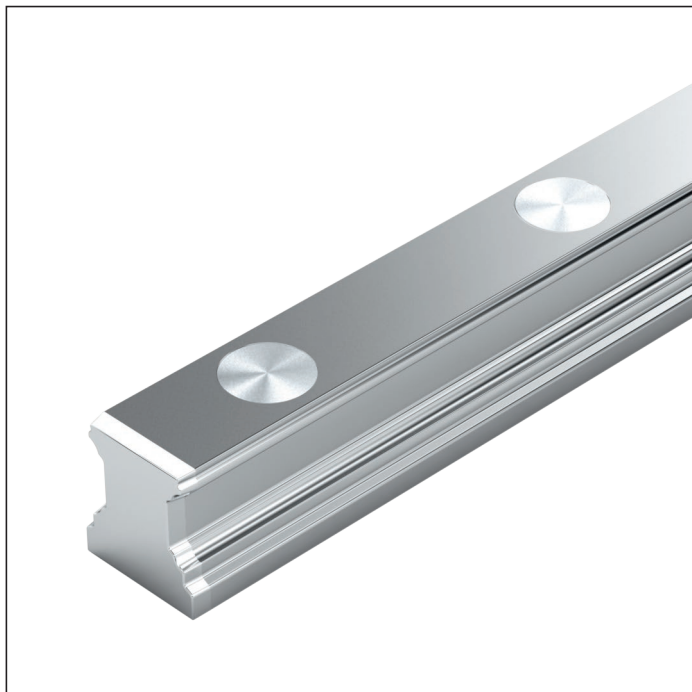

**R1606 .5. ..**

**For bolting from above, for caps made of steel**

### Notes

- ▶ Caps made of steel not included in scope of delivery.
- ▶ Observe the instruction for mounting!  
Please request the "Mounting instructions for ball rail systems".
- ▶ Composite ball guide rail also available.

### Further ball guide rails SNS and accessories

- ▶ Caps made of steel, mounting device for caps made of steel see Accessories for ball guide rails

### Options and material numbers

| Size         | Ball guide rail with size | Accuracy class |   |   |    | Number of partial sections, rail length L (mm), ... |           | Spacing T (mm) | Recommended rail length in accordance with formula $L = n_B \cdot T - 4 \text{ mm}$ |    |
|--------------|---------------------------|----------------|---|---|----|-----------------------------------------------------|-----------|----------------|-------------------------------------------------------------------------------------|----|
|              |                           | N              | H | P | SP | One-piece                                           | Composite |                | Maximum number of holes $n_B$                                                       |    |
| <b>25</b>    | R1606 25                  | 4              | 3 | 2 | 1  | 31, ...                                             | 3., ...   | 60             |                                                                                     | 64 |
| <b>30</b>    | R1606 75                  | 4              | 3 | 2 | 1  | 31, ...                                             | 3., ...   | 80             |                                                                                     | 48 |
| <b>35</b>    | R1606 35                  | 4              | 3 | 2 | 1  | 31, ...                                             | 3., ...   | 80             |                                                                                     | 48 |
| <b>45</b>    | R1606 45                  | 4              | 3 | 2 | 1  | 31, ...                                             | 3., ...   | 105            |                                                                                     | 36 |
| <b>55</b>    | R1606 55                  | 4              | 3 | 2 | 1  | 31, ...                                             | 3., ...   | 120            |                                                                                     | 32 |
| <b>65</b>    | R1606 65                  | 4              | 3 | 2 | 1  | 31, ...                                             | 3., ...   | 150            |                                                                                     | 25 |
| <b>E.g.:</b> | R1606 75                  | 3              |   |   |    | 31, 1676                                            |           |                |                                                                                     |    |

### Ordering example 1 (to $L_{\max}$ )

Options:

- ▶ Ball guide rail SNS
- ▶ Size 30
- ▶ Accuracy class H
- ▶ One-piece
- ▶ Rail length  
L = 1676 mm

Material number:

R1606 753 31, 1676 mm


### Ordering example 2 (above $L_{\max}$ )

Options:

- ▶ Ball guide rail SNS
- ▶ Size 30
- ▶ Accuracy class H
- ▶ **2 partial sections**
- ▶ Rail length  
L = 5116 mm

Material number:


R1606 753 32, 5116 mm

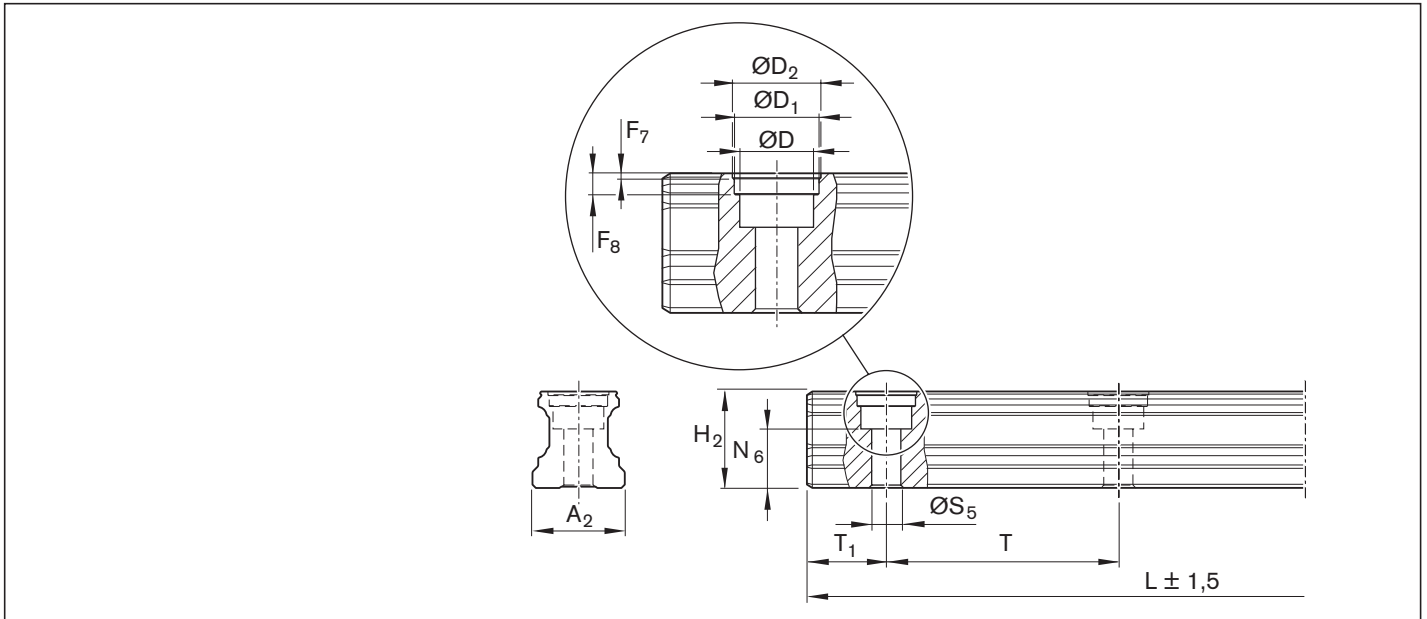

| Size | Dimensions (mm) |      |                |                |                |                |                              |                                |                                |                |     |                    |                               |                    | Mass m<br>(kg/m) |
|------|-----------------|------|----------------|----------------|----------------|----------------|------------------------------|--------------------------------|--------------------------------|----------------|-----|--------------------|-------------------------------|--------------------|------------------|
|      | A <sub>2</sub>  | D    | D <sub>1</sub> | D <sub>2</sub> | F <sub>7</sub> | F <sub>8</sub> | H <sub>2</sub> <sup>1)</sup> | L <sub>max</sub> <sup>2)</sup> | N <sub>6</sub> <sup>±0.5</sup> | S <sub>5</sub> | T   | T <sub>1 min</sub> | T <sub>1S</sub> <sup>3)</sup> | T <sub>1 max</sub> |                  |
| 25   | 23              | 11.0 | 12.55          | 13.0           | 0.90           | 3.7            | 24.25                        | 3 836                          | 15.2                           | 7.0            | 60  | 13                 | 28.0                          | 50                 | 3.2              |
| 30   | 28              | 15.0 | 17.55          | 18.0           | 0.90           | 3.6            | 28.35                        | 3 836                          | 17.0                           | 9.0            | 80  | 16                 | 38.0                          | 68                 | 5.0              |
| 35   | 34              | 15.0 | 17.55          | 18.0           | 0.90           | 3.6            | 31.85                        | 3 836                          | 20.5                           | 9.0            | 80  | 16                 | 38.0                          | 68                 | 6.8              |
| 45   | 45              | 20.0 | 22.55          | 23.0           | 1.45           | 8.0            | 39.85                        | 3 776                          | 23.5                           | 14.0           | 105 | 18                 | 50.5                          | 89                 | 10.5             |
| 55   | 53              | 24.0 | 27.55          | 28.0           | 1.45           | 8.0            | 47.85                        | 3 836                          | 29.0                           | 16.0           | 120 | 20                 | 58.0                          | 102                | 16.2             |
| 65   | 63              | 26.0 | 29.55          | 30.0           | 1.45           | 8.0            | 59.85                        | 3 746                          | 38.5                           | 18.0           | 150 | 21                 | 73.0                          | 130                | 22.4             |

- 1) Dimension H<sub>2</sub> without cover strip
- 2) For size 25 - 45 in accuracy class N, H and P one-piece ball guide rail lengths are available for  
Size 25 to 5816 mm on request.  
Size 30 - 35 to 5836 mm available on request.  
Size 45 to 5771 mm available on request.
- 3) Preferred dimension T<sub>1S</sub> with tolerances ±0.75 recommended.

## SNS for bolting from below

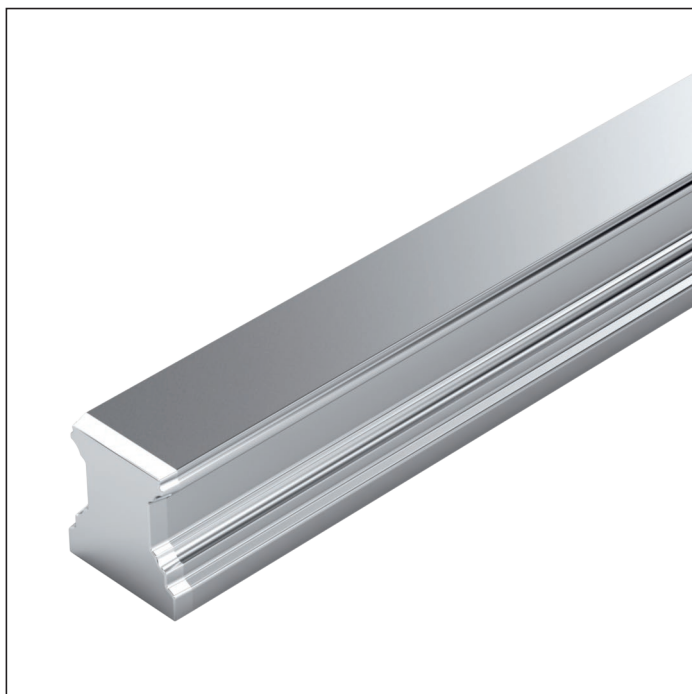

### R1607 .0. ..

#### For bolting from below

#### Notes

► Observe the instruction for mounting!  
Please request the "Mounting instructions for ball rail systems".

► Composite ball guide rail also available.

#### Further ball guide rails SNS and accessories

► Corrosion-resistant Resist CR ball guide rails and stainless-steel Resist NR ball guide rails

### Options and material numbers

| Size  | Ball guide rail with size | Accuracy class |   |   |    |    | Number of partial sections, rail length L (mm), ... |           | Spacing T (mm) | Recommended rail length in accordance with formula $L = n_B \cdot T - 4 \text{ mm}$ |    |
|-------|---------------------------|----------------|---|---|----|----|-----------------------------------------------------|-----------|----------------|-------------------------------------------------------------------------------------|----|
|       |                           | N              | H | P | SP | UP | One-piece                                           | Composite |                | Maximum number of holes $n_B$                                                       |    |
| 15    | R1607 10                  | 4              | 3 | 2 | 1  | 9  | 31, ...                                             | 3., ...   | 60             |                                                                                     | 64 |
| 20    | R1607 80                  | 4              | 3 | 2 | 1  | 9  | 31, ...                                             | 3., ...   | 60             |                                                                                     | 64 |
| 25    | R1607 20                  | 4              | 3 | 2 | 1  | 9  | 31, ...                                             | 3., ...   | 60             |                                                                                     | 64 |
| 30    | R1607 70                  | 4              | 3 | 2 | 1  | 9  | 31, ...                                             | 3., ...   | 80             |                                                                                     | 48 |
| 35    | R1607 30                  | 4              | 3 | 2 | 1  | 9  | 31, ...                                             | 3., ...   | 80             |                                                                                     | 48 |
| 45    | R1607 40                  | 4              | 3 | 2 | 1  | 9  | 31, ...                                             | 3., ...   | 105            |                                                                                     | 36 |
| 55    | R1607 50                  | 4              | 3 | 2 | 1  | 9  | 31, ...                                             | 3., ...   | 120            |                                                                                     | 32 |
| 65    | R1607 60                  | 4              | 3 | 2 | 1  | 9  | 31, ...                                             | 3., ...   | 150            |                                                                                     | 25 |
| E.g.: | R1607 70                  | 3              |   |   |    |    | 31, 1676                                            |           |                |                                                                                     |    |

#### Ordering example 1 (to $L_{\max}$ )

Options:

- Ball guide rail SNS
- Size 30
- Accuracy class H
- One-piece
- Rail length  
 $L = 1676 \text{ mm}$

Material number:

R1607 703 31, 1676 mm


#### Ordering example 2 (above $L_{\max}$ )

Options:

- Ball guide rail SNS
- Size 30
- Accuracy class H
- **2 partial sections**
- Rail length  
 $L = 5116 \text{ mm}$

Material number:

R1607 703 32, 5116 mm

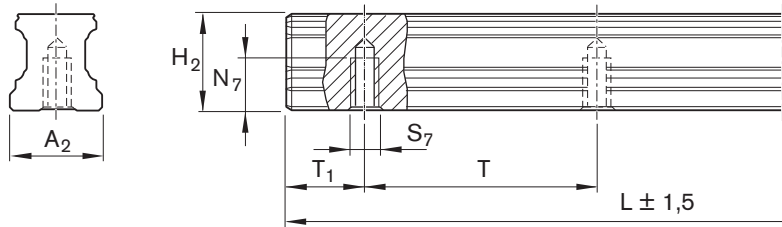

| Size | Dimensions (mm) |                              |                                |                |                |     |                   |                               |                   | Mass m<br>(kg/m) |
|------|-----------------|------------------------------|--------------------------------|----------------|----------------|-----|-------------------|-------------------------------|-------------------|------------------|
|      | A <sub>2</sub>  | H <sub>2</sub> <sup>1)</sup> | L <sub>max</sub> <sup>2)</sup> | N <sub>7</sub> | S <sub>7</sub> | T   | T <sub>1min</sub> | T <sub>1s</sub> <sup>3)</sup> | T <sub>1max</sub> |                  |
| 15   | 15              | 16.20                        | 3 836                          | 7.5            | M5             | 60  | 10                | 28.0                          | 50                | 1.4              |
| 20   | 20              | 20.55                        | 3 836                          | 9.0            | M6             | 60  | 10                | 28.0                          | 50                | 2.4              |
| 25   | 23              | 24.25                        | 3 836                          | 12.0           | M6             | 60  | 10                | 28.0                          | 50                | 3.2              |
| 30   | 28              | 28.35                        | 3 836                          | 15.0           | M8             | 80  | 12                | 38.0                          | 68                | 5.0              |
| 35   | 34              | 31.85                        | 3 836                          | 15.0           | M8             | 80  | 12                | 38.0                          | 68                | 6.8              |
| 45   | 45              | 39.85                        | 3 776                          | 19.0           | M12            | 105 | 16                | 50.5                          | 89                | 10.5             |
| 55   | 53              | 47.85                        | 3 836                          | 22.0           | M14            | 120 | 18                | 58.0                          | 102               | 16.2             |
| 65   | 63              | 59.85                        | 3 746                          | 25.0           | M16            | 150 | 20                | 73.0                          | 130               | 22.4             |

- 1) Dimension H<sub>2</sub> without cover strip
- 2) For size 20 - 45 in accuracy class N, H and P one-piece ball guide rail lengths are available for  
Size 20 - 25 to 5816 mm available on request.  
Size 30 - 35 to 5836 mm available on request.  
Size 45 to 5771 mm available on request.
- 3) Preferred dimension T<sub>1S</sub> with tolerances ±0.75 recommended.

## Product description

### General notes on ball guide rails Resist NR II

For material numbers, please refer to the following pages. For recommended rail lengths, dimensions and gravity, see corresponding standard steel ball guide rails. Observe the chapter "Instruction for mounting"!

Please request the "Mounting instructions for ball rail systems" and "Mounting instructions for cover strip".

**Accessories: Cover strip, strip clamps, caps, ... for ball guide rails, see chapter "Accessories for ball guide rails"**

### Corrosion resistance and conditions of use

Ball guide rails Resist NR II as well as all steel parts are made of corrosion-resistant steel according to DIN EN 10088, strip clamps are made of aluminum. Ball guide rails Resist NR II are used specifically in conjunction with water-based media, heavily diluted acidic materials, alkali or saline solutions. These guides are also ideally suitable for use at relative humidities above 70% and temperatures exceeding 30 °C. Such conditions are found mainly in cleaning plants, electroplating and pickling lines, vapor degreasing plants and refrigeration systems. Since no additional corrosion protection is required, ball rail systems Resist NR II are ideally suited for use in clean rooms and general printed circuit board manufacturing. Other possible areas of application include the pharmaceutical and food industries.


**Recommended ball runner blocks for Resist NR II ball guide rails, see the "Ball runner block Resist NR II" chapter**  
**When using ball guide rails NR II, always use the lower load capacities of the ball runner blocks NR II.**

### Combinations of different accuracy classes

When combining ball guide rail and ball runner block of different accuracy classes, the tolerances for dimensions H and A<sub>3</sub> change (see "Accuracy classes and their tolerances").

## Ball guide rails Resist NR II

**R2045 .3. ..., SNS can be bolted from above, with cover strip and strip clamps**



### Options and material numbers

| Size             | Ball guide rail with size | Accuracy class |   |   | Number of partial sections, rail length L (mm), ... |           |
|------------------|---------------------------|----------------|---|---|-----------------------------------------------------|-----------|
|                  |                           | N              | H | P | One-piece                                           | Composite |
| 15 <sup>1)</sup> | R2045 13                  | 4              | 3 | 2 | 31, ...                                             | 3., ...   |
| 20               | R2045 83                  | 4              | 3 | 2 | 31, ...                                             | 3., ...   |
| 25               | R2045 23                  | 4              | 3 | 2 | 31, ...                                             | 3., ...   |
| 30               | R2045 73                  | 4              | 3 | 2 | 31, ...                                             | 3., ...   |
| 35               | R2045 33                  | 4              | 3 | 2 | 61, ...                                             | 6., ...   |
| E.g.:            | R2045 73                  | 3              |   |   | 31, 1676                                            |           |

1) Maximum rail length 1856 mm, maximum number of holes n<sub>B</sub> 30

### Instruction for mounting

- Secure the cover strip!
- Strip clamps included in scope of delivery.
- Composite ball guide rail also available.

### Ordering example 1 (to L<sub>max</sub>)

Options:

- Ball guide rail NR II, SNS
- Size 30
- Accuracy class H
- One-piece
- Rail length  
L = 1676 mm

Material number:

R2045 733 31, 1676 mm

### Ordering example 2 (above L<sub>max</sub>)

Options:


- Ball guide rail NR II, SNS
- Size 30
- Accuracy class H
- 2 partial sections
- Rail length  
L = 5116 mm

Material number:

R2045 733 32, 5116 mm

# Ball guide rails Resist NR II

**R2045 .0. ... SNS can be bolted from above, with plastic caps**



## Options and material numbers

| Size             | Ball guide rail with size | Accuracy class |   |   | Number of partial sections, rail length L (mm), ... |           |
|------------------|---------------------------|----------------|---|---|-----------------------------------------------------|-----------|
|                  |                           | N              | H | P | One-piece                                           | Composite |
| 15 <sup>1)</sup> | R2045 10                  | 4              | 3 | 2 | 31, ...                                             | 3., ...   |
| 20               | R2045 80                  | 4              | 3 | 2 | 31, ...                                             | 3., ...   |
| 25               | R2045 20                  | 4              | 3 | 2 | 31, ...                                             | 3., ...   |
| 30               | R2045 70                  | 4              | 3 | 2 | 31, ...                                             | 3., ...   |
| 35               | R2045 30                  | 4              | 3 | 2 | 31, ...                                             | 3., ...   |
| <b>E.g.:</b>     | R2045 70                  | 3              |   |   | 31, 1676                                            |           |

1) Maximum rail length 1856 mm, maximum number of holes  $n_B$  30

### Instruction for mounting

- ▶ Plastic caps included in scope of supply.
- ▶ Composite ball guide rail also available.

### Ordering example 1 (to $L_{max}$ )

Options:

- ▶ Ball guide rail NR II, SNS
- ▶ Size 30
- ▶ Accuracy class H
- ▶ One-piece
- ▶ Rail length  
L = 1676 mm

Material number: R2045  
703 31, 1676 mm


### Ordering example 2 (above $L_{max}$ )

Options:

- ▶ Ball guide rail NR II, SNS
- ▶ Size 30
- ▶ Accuracy class H
- ▶ **2 partial sections**
- ▶ Rail length  
L = 5116 mm

Material number:  
R2045 703 **32**, 5116 mm

**R2047 .0. ... SNS, for bolting from below**



## Options and material numbers

| Size             | Ball guide rail with size | Accuracy class |   |   | Number of partial sections, rail length L (mm), ... |           |
|------------------|---------------------------|----------------|---|---|-----------------------------------------------------|-----------|
|                  |                           | N              | H | P | One-piece                                           | Composite |
| 15 <sup>1)</sup> | R2047 10                  | 4              | 3 | 2 | 31, ...                                             | 3., ...   |
| 20               | R2047 80                  | 4              | 3 | 2 | 31, ...                                             | 3., ...   |
| 25               | R2047 20                  | 4              | 3 | 2 | 31, ...                                             | 3., ...   |
| 30               | R2047 70                  | 4              | 3 | 2 | 31, ...                                             | 3., ...   |
| 35               | R2047 30                  | 4              | 3 | 2 | 31, ...                                             | 3., ...   |
| <b>E.g.:</b>     | R2047 70                  | 3              |   |   |                                                     | 32, 5116  |

1) Maximum rail length 1856 mm, maximum number of holes  $n_B$  30

### Instruction for mounting

- ▶ Composite ball guide rail also available.

### Ordering example 1 (to $L_{max}$ )

Options:

- ▶ Ball guide rail NR II, SNS
- ▶ Size 30
- ▶ Accuracy class H
- ▶ One-piece
- ▶ Rail length  
L = 1676 mm

Material number:  
R2047 703 31, 1676 mm

### Ordering example 2 (above $L_{max}$ )

Options:

- ▶ Ball guide rail NR II, SNS
- ▶ Size 30
- ▶ Accuracy class H
- ▶ **2 partial sections**
- ▶ Rail length  
L = 5116 mm

Material number:  
R2047 703 **32**, 5116 mm

## Product description

### General notes on ball guide rails Resist CR

For material numbers, please refer to the following pages. For recommended rail lengths, dimensions and gravity, see corresponding standard steel ball guide rails. Observe the chapter "Instruction for mounting"!

Please request the "Mounting instructions for ball rail systems" and "Mounting instructions for cover strip".

**Accessories:** Cover strip, strip clamps, caps, ... for ball guide rails, see chapter "Accessories for ball guide rails"

### Corrosion-resistant Resist CR coating

Ball guide rails made of steel with corrosion-resistant coating, matte-silver, hard chrome plated. Depending on the process, areas of the product may have a very thin to minimal layer thickness (e.g. bores, slots, undercuts...)

### Ball guide rails with coated end faces

- ▶ Coated end faces, chamfers and end-face thread, material numbers: – R16.. ... 41 or R16.. ... 71
- ▶ Multi-part ball guide rails are chamfered on two sides at the joints.

### Recommended ball runner blocks for ball guide rails Resist CR of accuracy class H and preload class C0 and C1

Size 15 - 65: Accuracy class H, preload class C0


Size 30 - 65: Accuracy class H, preload class C1

### Combinations of different accuracy classes

Combining ball guide rails and ball runner blocks of different accuracy classes results in different tolerances for the dimensions H and A3 (see chapter "Accuracy classes and their tolerances").

## Ball guide rails Resist CR

**R1645 .3. ..., SNS can be bolted from above, with cover strip and strip clamps**



### Options and material numbers

| Size  | Ball guide rail with size | Accuracy class | Number of partial sections, rail length L (mm), ... |                               |
|-------|---------------------------|----------------|-----------------------------------------------------|-------------------------------|
|       |                           |                | One-piece<br>Coated end faces                       | Composite<br>Coated end faces |
| 15    | R1645 13                  | 3              | 41, ...                                             | 4., ...                       |
| 20    | R1645 83                  | 3              | 41, ...                                             | 4., ...                       |
| 25    | R1645 23                  | 3              | 41, ...                                             | 4., ...                       |
| 30    | R1645 73                  | 3              | 41, ...                                             | 4., ...                       |
| 35    | R1645 33                  | 3              | 71, ...                                             | 7., ...                       |
| 45    | R1645 43                  | 3              | 71, ...                                             | 7., ...                       |
| 55    | R1645 53                  | 3              | 71, ...                                             | 7., ...                       |
| 65    | R1645 63                  | 3              | 71, ...                                             | 7., ...                       |
| E.g.: | R1645 73                  | 3              | 41, 1676                                            |                               |

### Instruction for mounting

- ▶ Secure the cover strip!
- ▶ Strip clamps included in scope of delivery.
- ▶ Composite ball guide rail also available.

### Ordering example 1 (to $L_{\max}$ )

Options:

- ▶ Ball guide rail CR, SNS
- ▶ Size 30
- ▶ Accuracy class H
- ▶ One-piece
- ▶ End faces coated
- ▶ Rail length  
L = 1676 mm

Material number:

R1645 733 41, 1676 mm

### Ordering example 2 (above $L_{\max}$ )

Options:

- ▶ Ball guide rail CR, SNS
- ▶ Size 30
- ▶ Accuracy class H
- ▶ **2 partial sections**
- ▶ End faces coated
- ▶ Rail length  
L = 5116 mm


Material number:

R1645 733 42, 5116 mm



# Ball guide rails Resist CR

**R1645 .0. ... SNS can be bolted from above, with plastic caps**



## Options and material numbers

| Size         | Ball guide rail with size | Accuracy class | Number of partial sections, rail length L (mm), ... |                               |
|--------------|---------------------------|----------------|-----------------------------------------------------|-------------------------------|
|              |                           |                | One-piece<br>Coated end faces                       | Composite<br>Coated end faces |
| <b>15</b>    | R1645 10                  | 3              | 41, ...                                             | 4, ...                        |
| <b>20</b>    | R1645 80                  | 3              | 41, ...                                             | 4, ...                        |
| <b>25</b>    | R1645 20                  | 3              | 41, ...                                             | 4, ...                        |
| <b>30</b>    | R1645 70                  | 3              | 41, ...                                             | 4, ...                        |
| <b>35</b>    | R1645 30                  | 3              | 41, ...                                             | 4, ...                        |
| <b>45</b>    | R1645 40                  | 3              | 41, ...                                             | 4, ...                        |
| <b>55</b>    | R1645 50                  | 3              | 41, ...                                             | 4, ...                        |
| <b>65</b>    | R1645 60                  | 3              | 41, ...                                             | 4, ...                        |
| <b>E.g.:</b> | R1645 70                  | 3              | 41, 1676                                            |                               |

## Instruction for mounting

- ▶ Plastic caps included in scope of supply.
- ▶ Composite ball guide rail also available.

## Ordering example 1 (to $L_{max}$ )

Options:

- ▶ Ball guide rail CR, SNS
- ▶ Size 30
- ▶ Accuracy class H
- ▶ One-piece
- ▶ End faces coated
- ▶ Rail length  
L = 1676 mm

Material number:

R1645 703 41, 1676 mm

## Ordering example 2 (above $L_{max}$ )


Options:

- ▶ Ball guide rail CR, SNS
- ▶ Size 30
- ▶ Accuracy class H
- ▶ **2 partial sections**
- ▶ End faces coated
- ▶ Rail length  
L = 5116 mm

Material number:

R1645 703 **42**, 5116 mm

**R1647 .0. ... SNS for bolting from below**



## Options and material numbers

| Size         | Ball guide rail with size | Accuracy class | Number of partial sections, rail length L (mm), ... |                               |
|--------------|---------------------------|----------------|-----------------------------------------------------|-------------------------------|
|              |                           |                | One-piece<br>Coated end faces                       | Composite<br>Coated end faces |
| <b>15</b>    | R1647 10                  | 3              | 41, ...                                             | 4, ...                        |
| <b>20</b>    | R1647 80                  | 3              | 41, ...                                             | 4, ...                        |
| <b>25</b>    | R1647 20                  | 3              | 41, ...                                             | 4, ...                        |
| <b>30</b>    | R1647 70                  | 3              | 41, ...                                             | 4, ...                        |
| <b>35</b>    | R1647 30                  | 3              | 41, ...                                             | 4, ...                        |
| <b>45</b>    | R1647 40                  | 3              | 41, ...                                             | 4, ...                        |
| <b>55</b>    | R1647 50                  | 3              | 41, ...                                             | 4, ...                        |
| <b>65</b>    | R1647 60                  | 3              | 41, ...                                             | 4, ...                        |
| <b>E.g.:</b> | R1647 70                  | 3              |                                                     | 42, 5116                      |

## Instruction for mounting

- ▶ Composite ball guide rail also available.

## Ordering example 1 (to $L_{max}$ )

Options:

- ▶ Ball guide rail CR, SNS
- ▶ Size 30
- ▶ Accuracy class H
- ▶ One-piece
- ▶ End faces coated
- ▶ Rail length  
L = 1676 mm

Material number:

R1647 703 41, 1676 mm

## Ordering example 2 (above $L_{max}$ )

Options:

- ▶ Ball guide rail CR, SNS
- ▶ Size 30
- ▶ Accuracy class H
- ▶ **2 partial sections**
- ▶ End faces coated
- ▶ Rail length  
L = 5116 mm

Material number:

R1647 703 **42**, 5116 mm



# Ball guide rails with temperature control

## Product description

### Characteristic features


#### Faster starting, more precise movement, simple conversion

What used to only be possible with a lot of effort and special solutions is now available for the first time as standard: Rexroth has integrated temperature control into the guide rail. Wherever fast travel cycles and the highest precision are required, guide rails can now be started without any run-in time. Always at the perfect temperature and thermally stable. And with less waste. Ideal for retrofitting: Simply replace the rail and connect to the existing cooling circuit. You can turn your standard machines into precision machines in no time at all!

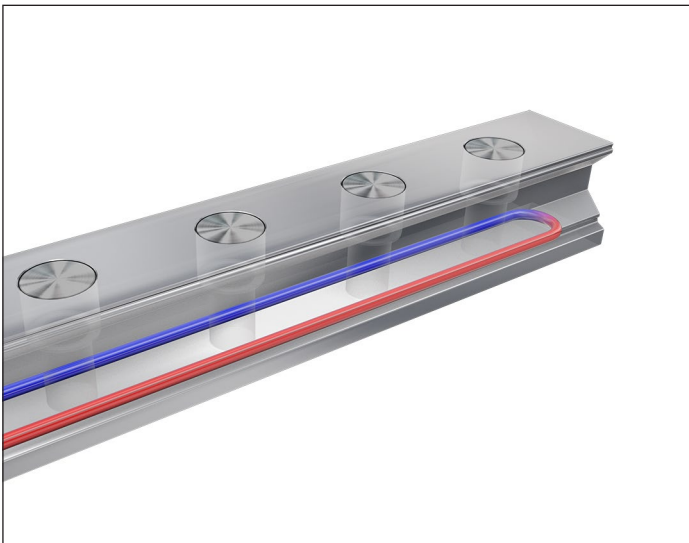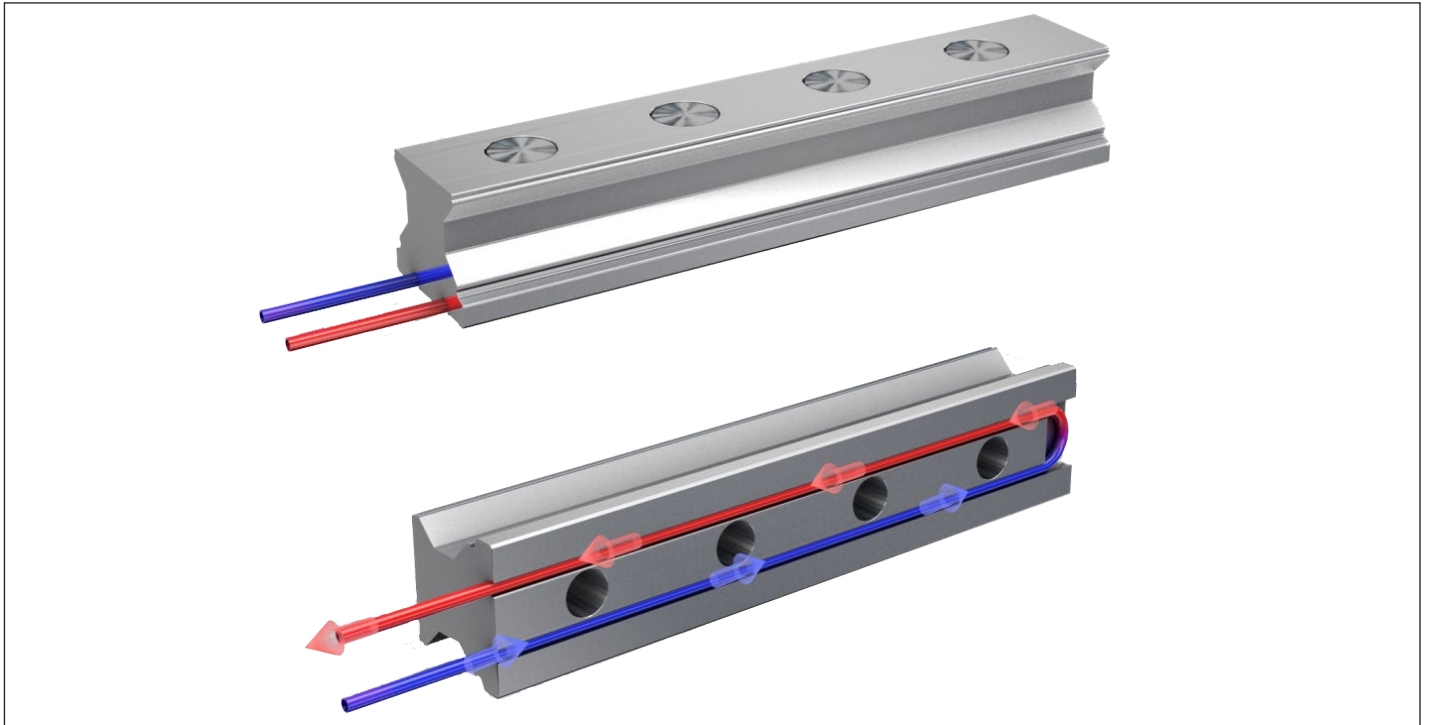


#### Extremely precise movement, flexible adjustment

Since the new guide rails by Rexroth remove the heat from where it is created or supplies it to where it is needed you have complete freedom. No matter where your machine is positioned or what material the machine bed is made from, the linear guides work with high precision and are thermally stable. No run-in time, with good parts right from the first part onwards. This ensures the greatest availability and increases part accuracy by up to 75%. Even with existing machines: Rails can be easily connected to existing cooling circuits with ready to connect piping. Finished.

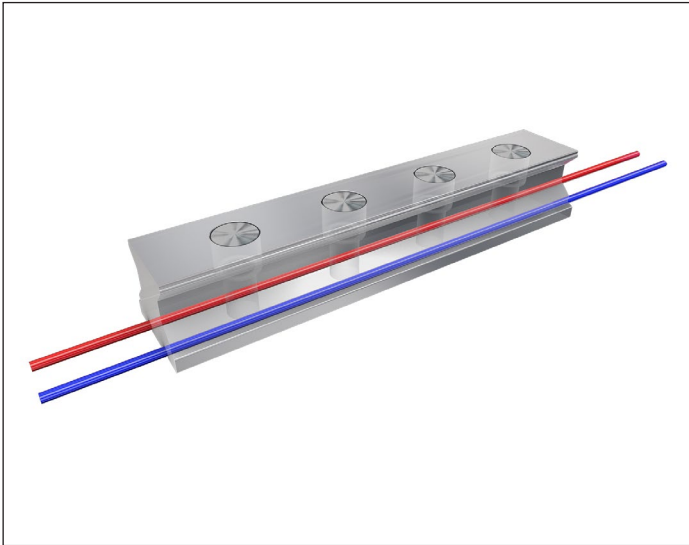

### Further highlights

- ▶ High precision: Up to 75% higher part accuracy, regardless of environment
- ▶ Always available: No run-in to the operating temperature
- ▶ Flexible: Can be adjusted to changes as required
- ▶ Can be retrofitted: compatible with existing systems
- ▶ Simple: Uses existing cooling circuits

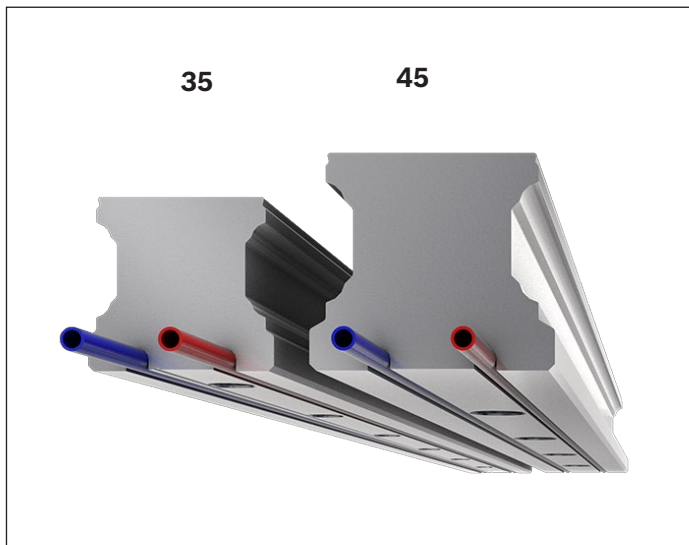

### Technical features

- ▶ Ball guide sizes: 35/45/55\*/65\*
- ▶ Formats: R1605
- ▶ Rail covers: Cover strip, plastic caps
- ▶ Series with/without groove
- ▶ Accuracy classes: P/SP
- ▶ Rail lengths: Up to max. 4000 mm
- ▶ Redirecting temperature control: To the rails or universal
- ▶ Patented

\*) on request

## Rethinking machine tools



The illustrations partly show the roller guide rail version.

## Product description

### Characteristic features

- ▶ Limitless interchangeability as all ball guide rail systems can be combined at will with all ball runner block versions within each accuracy class.
- ▶ Very high torsional moment load capacity and very high torsion resistance – therefore primarily used as an individual guide
- ▶ High torque load capacity
- ▶ The same high load capacities in all four main directions of loading
- ▶ Integrated all-round sealing
- ▶ Low noise level and optimum travel behavior
- ▶ Excellent dynamic characteristics:  
Travel speed:  $v_{\max}$  up to 5 m/s <sup>1)</sup>  
Acceleration:  $a_{\max}$  up to 500 m/s<sup>2</sup> <sup>1)</sup>
- ▶ Long-term lubrication is possible over several years
- ▶ Minimum quantity lubrication system with integrated reservoir for oil lubrication<sup>1)</sup>
- ▶ Lube fittings with metal threads on all sides<sup>1)</sup>
- ▶ Maximum system rigidity due to preloaded O-arrangement
- ▶ Wide range of accessories

### Further highlights

- ▶ Optimized entry-zone geometry and high number of balls minimize variation in elastic deflection
- ▶ End-face fastening thread for all attachments
- ▶ Linear guideway with low clearance or moderate preload
- ▶ Quiet, smooth running thanks to optimally designed ball and ball chain return and guideway<sup>1)</sup>
- ▶ Attachments on the ball runner block can be mounted from above and below<sup>1)</sup>
- ▶ Improved rigidity under lift-off and side loading conditions due to two additional mounting screw holes at the center of the ball runner block
- ▶ Ball runner block pre-lubricated at the factory<sup>1)</sup>
- ▶ Optionally available with ball chain<sup>1)</sup>
- ▶ Can be used on all ball guide rails BNS.

### Corrosion protection (optional)

- ▶ Resist CR:  
Ball runner block body or ball guide rail made of steel with corrosion-resistant coating, matte-silver finish, hard chrome plated

1) Type-dependent

### Size 20/40:

New ball rail system with different ball diameters. Not interchangeable with the old 20/40 size!

Overview of formats




**Size 20/40 and 25/70**

- ▶ With ball chain
- ▶ Pre-lubricated



**Size 35/90**

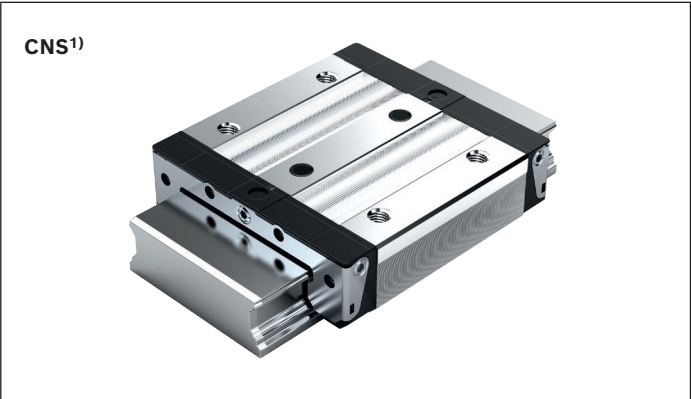


**Sizes 20/40 and 25/70**

- ▶ With ball chain
- ▶ Pre-lubricated

Definition of the format of ball runner blocks


| Criterion | Designation                | Code (example) |   |   |
|-----------|----------------------------|----------------|---|---|
|           |                            | B              | N | S |
| Width     | Flange <b>(F)</b>          | F              |   |   |
|           | Slimline <b>(S)</b>        | S              |   |   |
|           | Wide <b>(B)</b>            | B              |   |   |
|           | Compact <b>(C)</b>         | C              |   |   |
| Length    | Normal <b>(N)</b>          |                | N |   |
|           | Long <b>(L)</b>            |                | L |   |
|           | Short <b>(K)</b>           |                | K |   |
| Height    | Standard height <b>(S)</b> |                |   | S |
|           | High <b>(H)</b>            |                |   | H |
|           | Low <b>(N)</b>             |                |   | N |

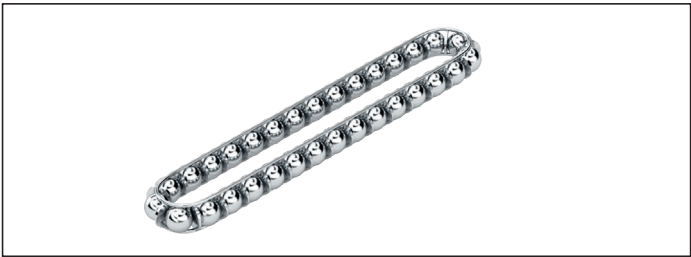

**Ball chain (optional)**

- ▶ Optimized noise level

## BNS – Wide, normal, standard height

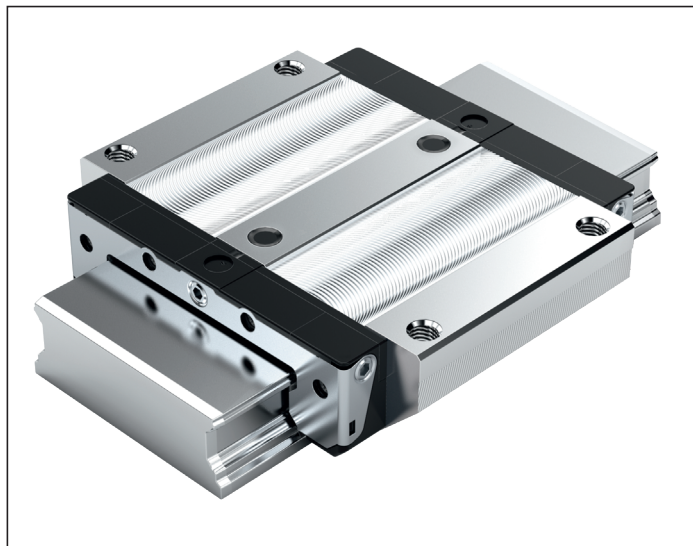**Ball runner block made of steel****R1671 ... 2.****Dynamic characteristics**Travel speed:  $v_{\max} = 5 \text{ m/s}$ Acceleration:  $a_{\max} = 500 \text{ m/s}^2$ (If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )**Note on lubrication:**

- Pre-lubricated

**Further ball runner blocks BNS**

- Corrosion-resistant ball runner blocks see below

**Ordering example**

Options:

- Ball runner block BNS
- Size 25/70
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1671 213 20

**Options and material numbers**

| Size                | Ball runner blocks with size | Preload class |    | Accuracy class |   |   | Seals on ball runner blocks |                 |    |    |
|---------------------|------------------------------|---------------|----|----------------|---|---|-----------------------------|-----------------|----|----|
|                     |                              | C0            | C1 | N              | H | P | without ball chain          | with ball chain | SS | DS |
| 20/40 <sup>1)</sup> | R1671 5                      | 9             |    | 4              | 3 | – | 20                          | –               | 22 | –  |
|                     |                              |               | 1  | 4              | 3 | 2 | 20                          | 2Z              | 22 | 2Y |
| 25/70               | R1671 2                      | 9             |    | 4              | 3 | – | 20                          | –               | 22 | –  |
|                     |                              |               | 1  | 4              | 3 | 2 | 20                          | 2Z              | 22 | 2Y |
| E.g.:               | R1671 2                      |               | 1  |                | 3 |   | 20                          |                 |    |    |

**Ball runner block Resist CR R1671 ... 7.****Note on lubrication:**

- Pre-lubricated

**Ordering example**

Options:

- Ball runner block BNS
- Size 25/70
- Preload class C0
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1671 293 70


**Options and material numbers**

| Size                | Ball runner blocks with size | Preload class |   | Accuracy class |  |   | Seals on ball runner blocks |                 |    |    |
|---------------------|------------------------------|---------------|---|----------------|--|---|-----------------------------|-----------------|----|----|
|                     |                              | C0            |   |                |  | H | without ball chain          | with ball chain | SS | DS |
| 20/40 <sup>1)</sup> | R1671 5                      | 9             |   |                |  | 3 | 70                          | 7Z              | 72 | 7Y |
| 25/70               | R1671 2                      | 9             |   |                |  | 3 | 70                          | 7Z              | 72 | 7Y |
| E.g.:               | R1671 2                      |               | 9 |                |  | 3 | 70                          |                 |    |    |

1) Caution: Ball runner blocks, not combinable with ball guide rail R167.8.. ...!

**Preload classes**C0 = Without preload (clearance)  
C1 = Moderate preload**Seals**SS = Standard seal  
DS = Double-lip seal**Key**Gray numbers  
= No preferred variants/combinations (partially longer delivery times)



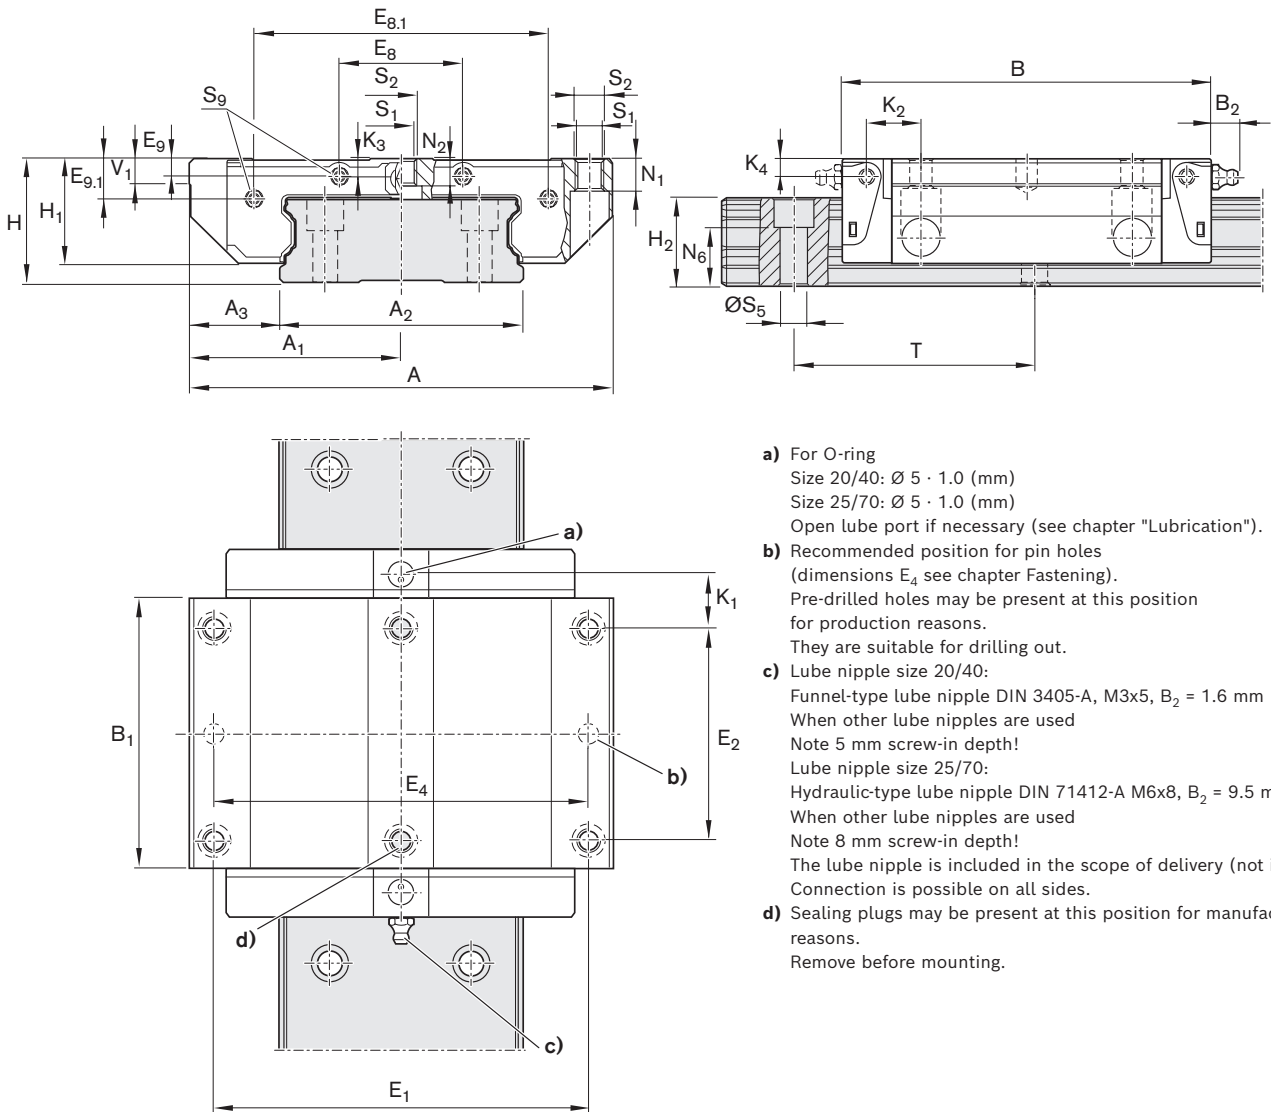

| Size  | Dimensions (mm) |                |                |                |     |                |                |                |                |                  |                |                  |    |                |                |                |
|-------|-----------------|----------------|----------------|----------------|-----|----------------|----------------|----------------|----------------|------------------|----------------|------------------|----|----------------|----------------|----------------|
|       | A               | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | B   | B <sub>1</sub> | E <sub>1</sub> | E <sub>2</sub> | E <sub>8</sub> | E <sub>8.1</sub> | E <sub>9</sub> | E <sub>9.1</sub> | H  | H <sub>1</sub> | H <sub>2</sub> | K <sub>1</sub> |
| 20/40 | 80              | 40             | 42             | 19.0           | 73  | 51.3           | 70             | 40             | 18             | 53.4             | 3.4            | 8.1              | 27 | 22.50          | 18.30          | 10.6           |
| 25/70 | 120             | 60             | 69             | 25.5           | 105 | 76.5           | 107            | 60             | 35             | 83.5             | 4.9            | 11.3             | 35 | 29.75          | 23.55          | 15.4           |

| Size  | Dimensions (mm) |                |                                |                |                |                |                        |    |                |                                                                                      | Mass<br>(kg) | Load capacities <sup>1)</sup><br>(N) |                                                                                       | Load moments <sup>1)</sup> (Nm) |                                                                                       |                 |  |
|-------|-----------------|----------------|--------------------------------|----------------|----------------|----------------|------------------------|----|----------------|--------------------------------------------------------------------------------------|--------------|--------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|---------------------------------------------------------------------------------------|-----------------|--|
|       | N <sub>1</sub>  | N <sub>2</sub> | N <sub>6</sub> <sup>±0.5</sup> | S <sub>1</sub> | S <sub>2</sub> | S <sub>5</sub> | S <sub>9</sub>         | T  | V <sub>1</sub> |  |              | C <sub>0</sub>                       |  | M <sub>t0</sub>                 |  | M <sub>L0</sub> |  |
| 20/40 | 7.70            | 3.70           | 12.5                           | 5.3            | M6             | 4.4            | M2.5x1.5 <sup>+3</sup> | 60 | 6.0            | 0.4                                                                                  | 14 900       | 20 600                               | 340                                                                                   | 470                             | 140                                                                                   | 190             |  |
| 25/70 | 9.35            | 7.05           | 14.4                           | 6.7            | M8             | 7.0            | M3x2 <sup>+4.5</sup>   | 80 | 7.5            | 1.2                                                                                  | 36 200       | 50 200                               | 1 350                                                                                 | 1 870                           | 490                                                                                   | 680             |  |

1) Load capacities and load moments for ball runner block **without** ball chain. Load capacities and load moments for ball runner block **with** ball chain 14 Determination of the dynamic load capacities and load moments is based on a travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** by 1.26 according to the table.

BNS – Wide, normal, standard height



Ball runner block made of steel  
R1671 ... 1.

Dynamic characteristics

Travel speed:  $v_{\max} = 3 \text{ m/s}$   
Acceleration:  $a_{\max} = 250 \text{ m/s}^2$   
(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

Note on lubrication:

▶ No initial lubrication

Further ball runner blocks BNS

▶ Corrosion-resistant ball runner blocks see below

Ordering example

- Options:
- ▶ Ball runner block BNS
  - ▶ Size 35/90
  - ▶ Preload class C1
  - ▶ Accuracy class H
  - ▶ With standard seal, without ball chain
- Material number:  
R1671 313 10

Options and material numbers

| Size  | Ball runner blocks with size | Preload class |    |    | Accuracy class |   |   | Seals on ball runner blocks without ball chain | SS |
|-------|------------------------------|---------------|----|----|----------------|---|---|------------------------------------------------|----|
|       |                              | C0            | C1 | C2 | N              | H | P |                                                |    |
| 35/90 | R1671 3                      | 9             |    |    | 4              | 3 | – |                                                | 10 |
|       |                              |               | 1  |    | 4              | 3 | 2 |                                                | 10 |
|       |                              |               |    | 2  |                | 3 | 2 |                                                | 10 |
| E.g.: | R1671 3                      |               | 1  |    |                | 3 |   |                                                | 10 |

Ball runner block Resist  
CR R1671 ... 6.

Ordering example

- Options:
- ▶ Ball runner block BNS
  - ▶ Size 35/90
  - ▶ Preload class C1
  - ▶ Accuracy class H
  - ▶ With standard seal, without ball chain
- Material number:  
R1671 313 60

Options and material numbers

| Size  | Ball runner blocks with size | Preload class |    | Accuracy class | Seals on ball runner blocks without ball chain | SS |
|-------|------------------------------|---------------|----|----------------|------------------------------------------------|----|
|       |                              | C0            | C1 |                |                                                |    |
| 35/90 | R1671 3                      | 9             | 1  |                | 3                                              | 60 |
| E.g.: | R1671 3                      |               | 1  |                | 3                                              | 60 |

**Preload classes**


C0 = Without preload (clearance)

C1 = Moderate preload

**Seals**

SS = Standard seal



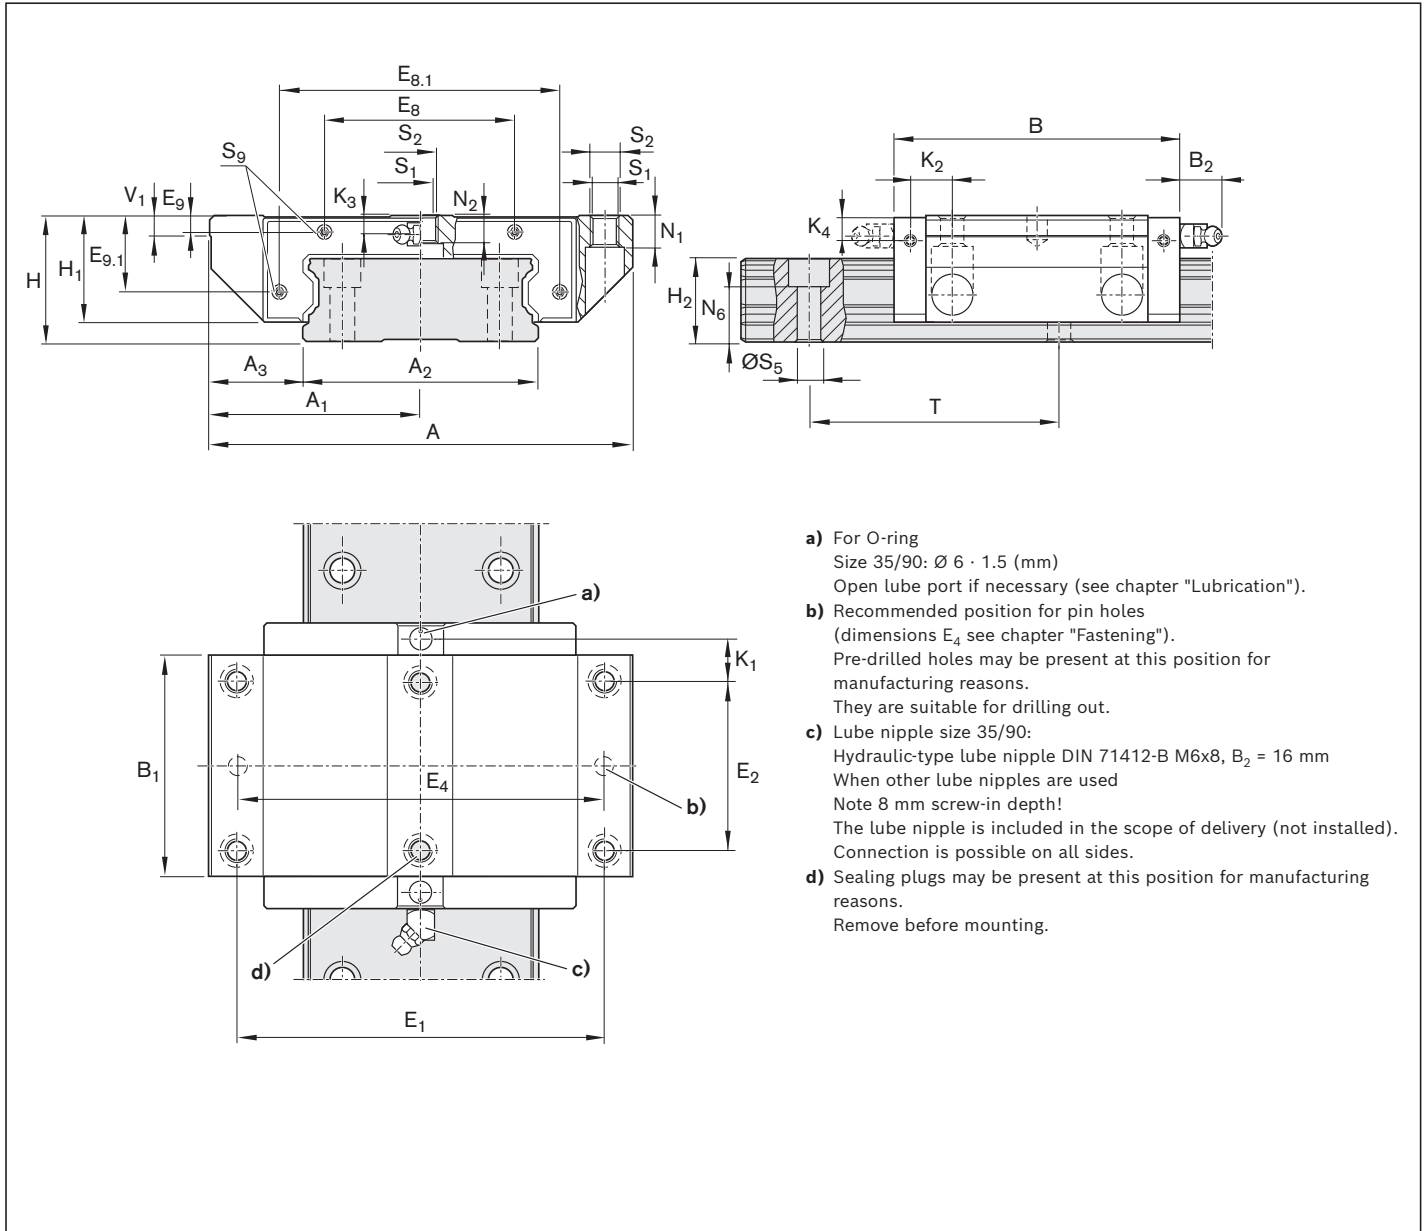


| Size  | Dimensions (mm) |                |                |                |     |                |                |                |                |                  |                |                  |    |                |                |                |                |
|-------|-----------------|----------------|----------------|----------------|-----|----------------|----------------|----------------|----------------|------------------|----------------|------------------|----|----------------|----------------|----------------|----------------|
|       | A               | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | B   | B <sub>1</sub> | E <sub>1</sub> | E <sub>2</sub> | E <sub>8</sub> | E <sub>8.1</sub> | E <sub>9</sub> | E <sub>9.1</sub> | H  | H <sub>1</sub> | H <sub>2</sub> | K <sub>1</sub> | K <sub>2</sub> |
| 35/90 | 162             | 81             | 90             | 36             | 142 | 113.6          | 144            | 80             | 79             | 116              | 6.8            | 29.9             | 50 | 42.5           | 31.85          | 22.8           | 24.8           |

| Size  | Dimensions (mm) |                |                |                |                                |                |                |                |                |    |                | Mass<br>(kg) | Load capacities <sup>1)</sup><br>(N)                                                 |                | Load moments <sup>1)</sup> (Nm)                                                       |                 |                                                                                       |                |                                                                                       |                 |
|-------|-----------------|----------------|----------------|----------------|--------------------------------|----------------|----------------|----------------|----------------|----|----------------|--------------|--------------------------------------------------------------------------------------|----------------|---------------------------------------------------------------------------------------|-----------------|---------------------------------------------------------------------------------------|----------------|---------------------------------------------------------------------------------------|-----------------|
|       | K <sub>3</sub>  | K <sub>4</sub> | N <sub>1</sub> | N <sub>2</sub> | N <sub>6</sub> <sup>±0.5</sup> | S <sub>1</sub> | S <sub>2</sub> | S <sub>5</sub> | S <sub>9</sub> | T  | V <sub>1</sub> |              |  | C <sub>0</sub> |  | M <sub>t0</sub> |  | M <sub>L</sub> |  | M <sub>L0</sub> |
| 35/90 | 9               | 9              | 14             | 12             | 20.5                           | 8.4            | M10            | 9              | M3x5           | 80 | 8.0            | 3.70         | 70                                                                                   | 700            | 126                                                                                   | 000             | 3 500                                                                                 | 6 240          | 1 470                                                                                 | 2 620           |

1) Load capacities and load moments for ball runner block **without** ball chain.

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** by 1.26 according to the table.

## CNS – Compact, normal, standard height

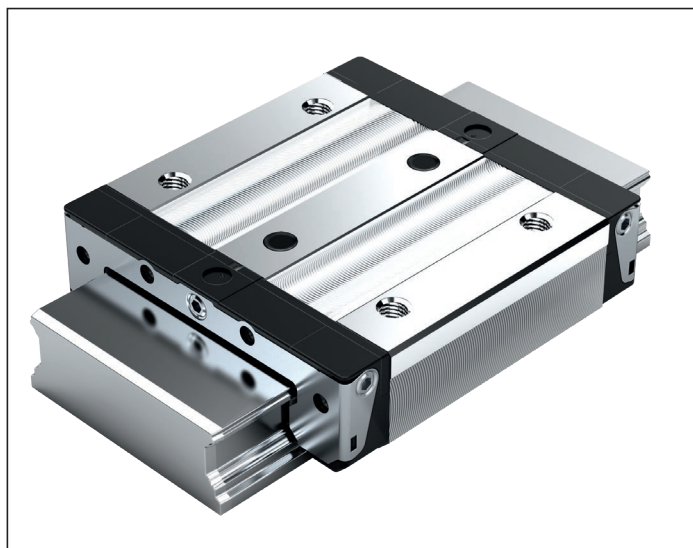

### Ball runner block made of steel R1672 ... 2.

#### Dynamic characteristics

Travel speed:  $v_{\max} = 5 \text{ m/s}$

Acceleration:  $a_{\max} = 500 \text{ m/s}^2$

(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication:

- Pre-lubricated

#### Further ball runner blocks CNS

- Corrosion-resistant ball runner blocks see below

#### Ordering example

Options:

- Ball runner block CNS
- Size 25/70
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1672 213 20

#### Options and material numbers

| Size                | Ball runner blocks with size | Preload class |    | Accuracy class |   |   | Seals on ball runner blocks |    |                 |    |
|---------------------|------------------------------|---------------|----|----------------|---|---|-----------------------------|----|-----------------|----|
|                     |                              | C0            | C1 | N              | H | P | without ball chain          |    | with ball chain |    |
|                     |                              |               |    |                |   |   | SS                          | DS | SS              | DS |
| 20/40 <sup>1)</sup> | R1672 5                      | 9             |    | 4              | 3 | – | 20                          | –  | 22              | –  |
|                     |                              |               | 1  | 4              | 3 | – | 20                          | 2Z | 22              | 2Y |
| 25/70               | R1672 2                      | 9             |    | 4              | 3 | – | 20                          | –  | 22              | –  |
|                     |                              |               | 1  | 4              | 3 | – | 20                          | 2Z | 22              | 2Y |
| E.g.:               | R1672 2                      |               | 1  |                | 3 |   | 20                          |    |                 |    |

### Ball runner block Resist CR<sup>2)</sup> R1672 ... 7.

#### Ordering example

Options:

- Ball runner block CNS
- Size 25/70
- Preload class C0
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1672 293 70

#### Options and material numbers

| Size                | Ball runner blocks with size | Preload class |   | Accuracy class |  |   | Seals on ball runner blocks |    |                 |    |
|---------------------|------------------------------|---------------|---|----------------|--|---|-----------------------------|----|-----------------|----|
|                     |                              | C0            |   |                |  | H | without ball chain          |    | with ball chain |    |
|                     |                              |               |   |                |  |   | SS                          | DS | SS              | DS |
| 20/40 <sup>1)</sup> | R1672 5                      | 9             |   |                |  | 3 | 70                          | 7Z | 72              | 7Y |
|                     |                              |               |   |                |  | 3 | 70                          | 7Z | 72              | 7Y |
| 25/70               | R1672 2                      | 9             |   |                |  | 3 | 70                          | 7Z | 72              | 7Y |
| E.g.:               | R1672 2                      |               | 9 |                |  | 3 | 70                          |    |                 |    |

1) Caution: Ball runner blocks, not combinable with ball guide rail R167.8... ..!

#### Preload classes


C0 = Without preload (clearance)  
C1 = Moderate preload

#### Seals

SS = Standard seal  
DS = Double-lip seal

#### Key

Gray numbers  
= No preferred variants/combinations (partially longer delivery times)

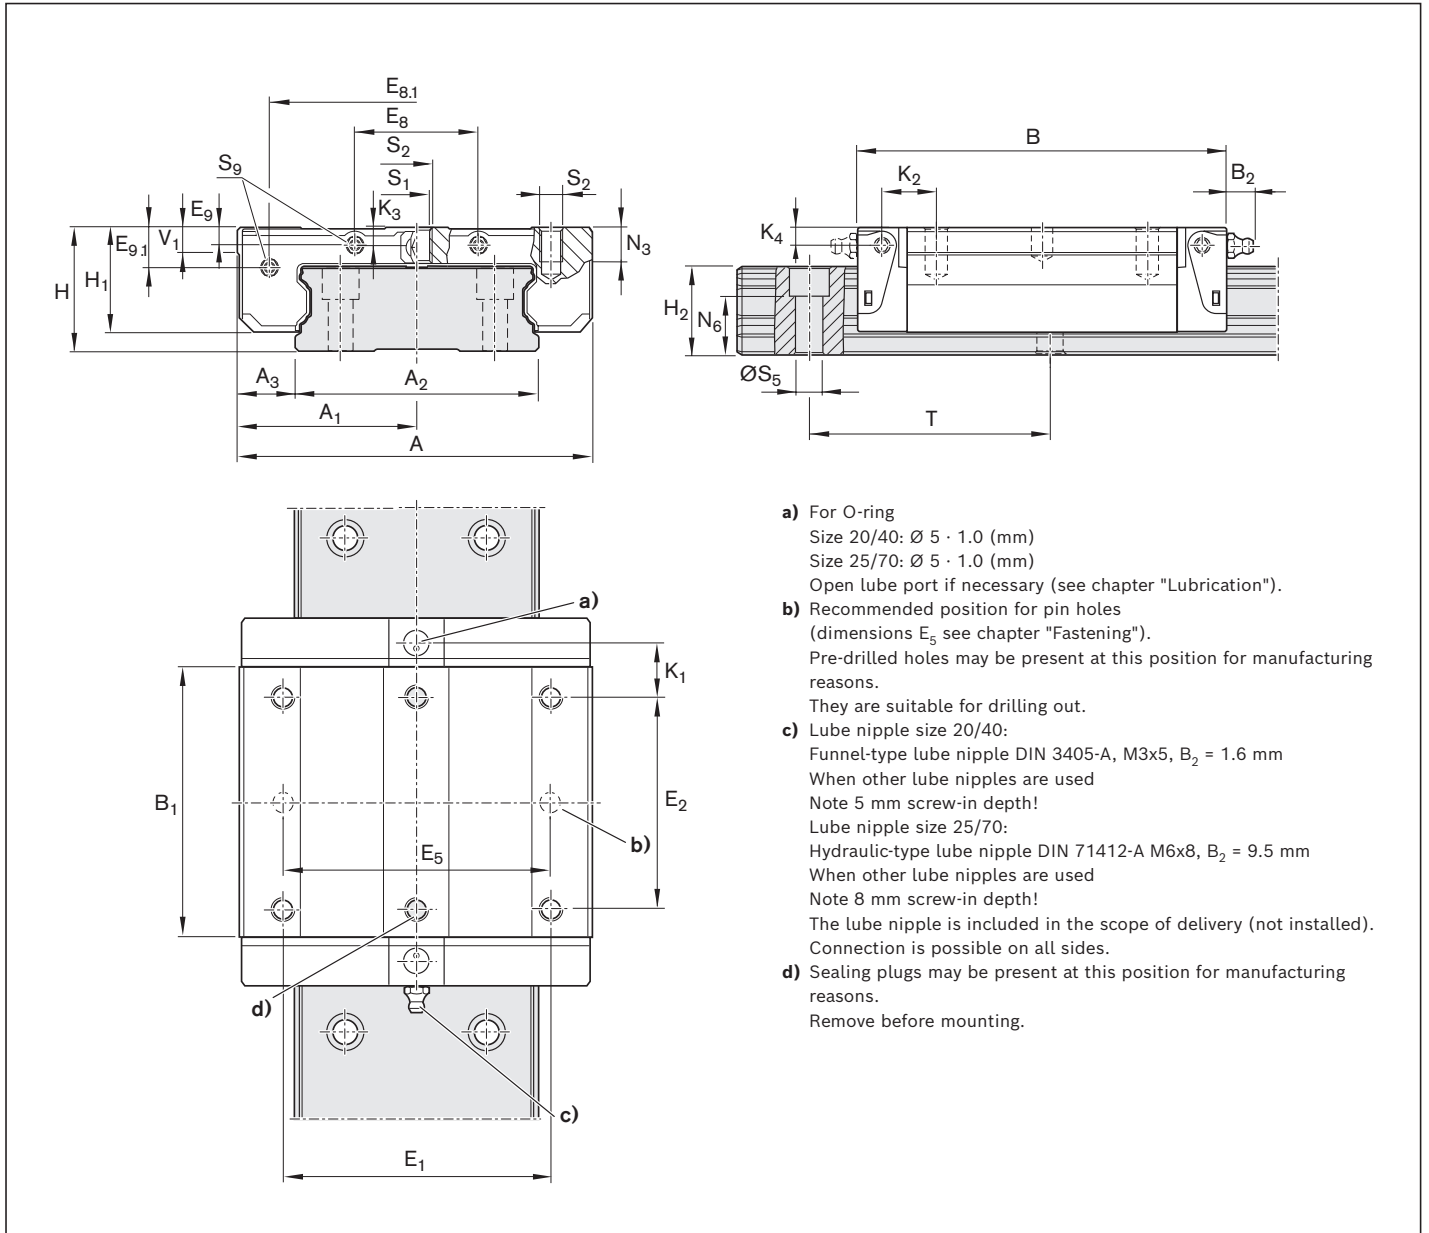

| Size         | Dimensions (mm) |                |                |                |       |                |                |                |                |                  |                |                  |    |                |                |                |                |                |                |
|--------------|-----------------|----------------|----------------|----------------|-------|----------------|----------------|----------------|----------------|------------------|----------------|------------------|----|----------------|----------------|----------------|----------------|----------------|----------------|
|              | A               | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | B     | B <sub>1</sub> | E <sub>1</sub> | E <sub>2</sub> | E <sub>8</sub> | E <sub>8.1</sub> | E <sub>9</sub> | E <sub>9.1</sub> | H  | H <sub>1</sub> | H <sub>2</sub> | K <sub>1</sub> | K <sub>2</sub> | K <sub>3</sub> | K <sub>4</sub> |
| <b>20/40</b> | 62              | 31             | 42             | 10.0           | 73.0  | 51.3           | 46             | 32             | 18             | 53.4             | 3.4            | 8.1              | 27 | 22.50          | 18.30          | 14.6           | 15.00          | 3.5            | 3.5            |
| <b>25/70</b> | 100             | 50             | 69             | 15.5           | 104.7 | 76.5           | 76             | 50             | 35             | 83.5             | 4.9            | 11.3             | 35 | 29.75          | 23.55          | 19.4           | 20.45          | 5.2            | 5.2            |

| Size  | Dimensions (mm) |                                |                |                |                |                        |    |                | Mass<br>(kg) | Load capacities <sup>1)</sup><br>(N)                                                 |                | Load moments <sup>1)</sup> (Nm)                                                       |                 |                                                                                       |                 |
|-------|-----------------|--------------------------------|----------------|----------------|----------------|------------------------|----|----------------|--------------|--------------------------------------------------------------------------------------|----------------|---------------------------------------------------------------------------------------|-----------------|---------------------------------------------------------------------------------------|-----------------|
|       | N <sub>3</sub>  | N <sub>6</sub> <sup>±0.5</sup> | S <sub>1</sub> | S <sub>2</sub> | S <sub>5</sub> | S <sub>9</sub>         | T  | V <sub>1</sub> |              |  | C <sub>0</sub> |  | M <sub>t0</sub> |  | M <sub>L0</sub> |
| 20/40 | 6               | 12.5                           | 5.3            | M6             | 4.4            | M2.5x1.5 <sup>+3</sup> | 60 | 6.0            | 0.3          | 14 900                                                                               | 20 600         | 340                                                                                   | 470             | 140                                                                                   | 190             |
| 25/70 | 8               | 14.4                           | 6.7            | M8             | 7.0            | M3x2 <sup>+4.5</sup>   | 80 | 7.5            | 1.0          | 36 200                                                                               | 50 200         | 1 350                                                                                 | 1 870           | 490                                                                                   | 680             |

**1)** Load capacities and load moments for ball runner block **without** ball chain. Load capacities and load moments for ball runner block **with** ball chain 14 Determination of the dynamic load capacities and load moments is based on a travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M<sub>L</sub>** and **M<sub>L0</sub>** by 1.26 according to the table.

# Product description

## Characteristic features

- ▶ Maximum rigidity in all directions of loading
- ▶ Maximum torque load capacity

## Corrosion protection (optional)


- ▶ Resist CR:  
Ball guide rail made of steel with corrosion-resistant coating, matte-silver finish, hard chrome plated, accuracy class H

## ⚠ Size 20/40:


Ball rail system with other ball diameters.  
Not interchangeable with the old 20/40 size!



Ball guide rails with plastic caps

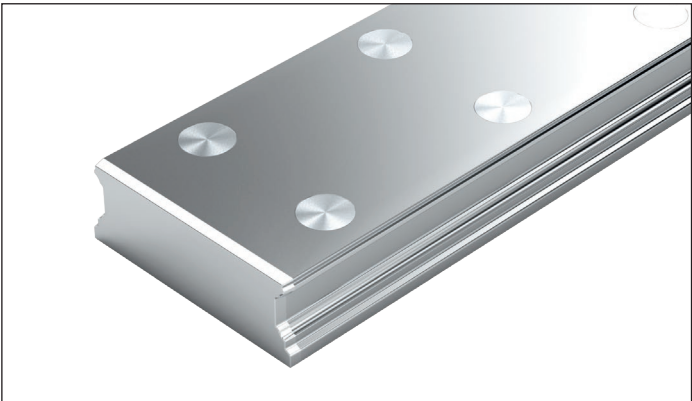

Ball guide rails with steel caps

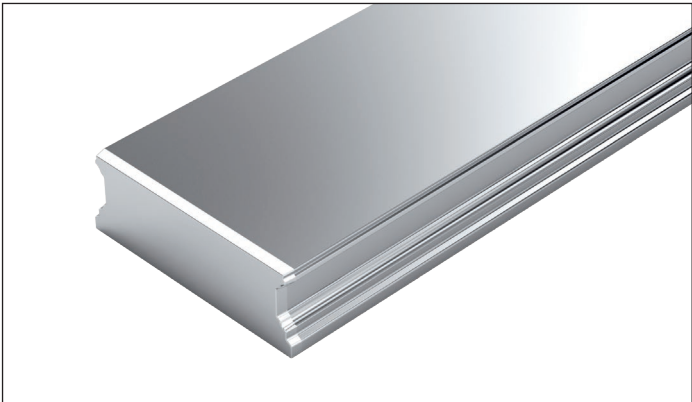

Ball guide rails for bolting from below

## Definition of the format of ball guide rails

| Criterion | Designation         | Code (example) |   |   |
|-----------|---------------------|----------------|---|---|
|           |                     | B              | N | S |
| Width     | Slimline (S)        | S              |   |   |
|           | Wide (B)            | B              |   |   |
| Length    | Normal (N)          |                | N |   |
| Height    | Standard height (S) |                |   | S |

# Ordering guide rails in the recommended rail lengths

## Ordering ball guide rails in the recommended rail lengths

The procedure shown in the following ordering examples applies to all ball guide rails. Recommended rail lengths are more cost effective.

## From the desired rail length to the recommended length

$$L = \left( \frac{L_W}{T} \right)^* \cdot T - 4$$

\* Round up quotient  $L_W/T$  to the nearest whole number!

### Calculation example

$$L = \left( \frac{1660 \text{ mm}}{80 \text{ mm}} \right) \cdot 80 \text{ mm} - 4 \text{ mm}$$

$$L = 21 \cdot 80 \text{ mm} - 4 \text{ mm}$$

$$L = 1676 \text{ mm}$$

### Notes on ordering examples


If preferred dimension  $T_{1S}$  is not used, it is possible to choose between:

- ▶ Select end spacing  $T_1$  between  $T_{1S}$  and  $T_{1 \min}$
- ▶ As an alternative, it is possible to choose end spacings  $T_1$  to  $T_{1 \max}$ .

Options and material numbers

| Size                | Ball guide rail with size | Accuracy class |   |   | Number of partial sections, rail length L (mm), ... |           | Spacing T (mm) | Recommended rail length in accordance with formula $L = n_B \cdot T - 4$<br>Maximum number of holes per drill row $n_B$ |
|---------------------|---------------------------|----------------|---|---|-----------------------------------------------------|-----------|----------------|-------------------------------------------------------------------------------------------------------------------------|
|                     |                           | N              | H | P | One-piece                                           | Composite |                |                                                                                                                         |
| 20/40 <sup>1)</sup> | R1675 50                  | 4              | 3 | 2 | 31, ...                                             | 3, ...    | 60             | 64                                                                                                                      |
| 25/70               | R1675 20                  | 4              | 3 | 2 | 31, ...                                             | 3, ...    | 80             | 48                                                                                                                      |
| 35/90               | R1675 30                  | 4              | 3 | 2 | 31, ...                                             | 3, ...    | 80             | 48                                                                                                                      |
| E.g.:               | R1675 30                  |                | 3 |   | 31, 1676                                            |           |                |                                                                                                                         |

Excerpt from table with material numbers and recommended rail lengths for ordering example

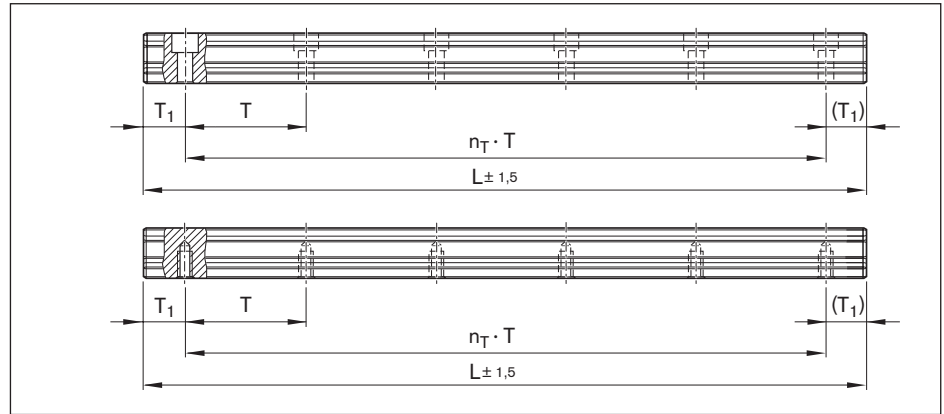

Basis: Number of holes per drill row

$$L = n_B \cdot T - 4$$

Basis: Number of spaces

$$L = n_T \cdot T + 2 \cdot T_{1S}$$

$L$  = Recommended rail length (mm)

$L_W$  = Desired rail length (mm)

$T$  = Spacing (mm)

$T_{1S}$  = Preferred dimension (mm)

$n_B$  = Number of holes per drill row (–)

$n_T$  = Number of spaces (–)

### Ordering example 1 (to $L_{\max}$ )

- ▶ Ball guide rail BNS size 35/90 with plastic caps
- ▶ Accuracy class H
- ▶ Calculated rail length 1676 mm, (20 · T, preferred dimension  $T_{1S} = 38$  mm; number of holes per drill row  $n_B = 21$ )

### Ordering data

Material number, rail length (mm)

$T_1 / n_T \cdot T / T_1$  (mm)

**R1675 303 31, 1676 mm**

**38 / 20 · 80 / 38 mm**

### Ordering example 2 (above $L_{\max}$ )

- ▶ Ball guide rail BNS size 35/90 with plastic caps
- ▶ Accuracy class H
- ▶ Calculated rail length 5116 mm, 2 sections (63 · T, preferred dimension  $T_{1S} = 38$  mm; number of holes per drill row  $n_B = 64$ )

### Ordering data

Material number with number of partial sections, rail length (mm)

$T_1 / n_T \cdot T / T_1$  (mm)

**R1675 303 32, 5116 mm**

**38 / 63 · 80 / 38 mm**

In the case of rail lengths above  $L_{\max}$ , factory-coordinated partial sections are joined together.

## BNS with plastic caps



### Ball guide rails made of steel

**R1675 .0. ..**

**With two-row hole pattern, for bolting from above with caps made of plastic**

#### Notes

- ▶ Plastic caps included in scope of supply.
- ▶ Observe the instruction for mounting!  
Please request the "Mounting instructions for ball rail systems".
- ▶ Composite ball guide rail also available.

#### Further ball guide rails BNS and accessories

- ▶ Corrosion-resistant ball guide rails see below
- ▶ Caps see chapter "Accessories for ball guide rails"

### Options and material numbers

| Size                      | Ball guide rail with size | Accuracy class |   |   | Number of partial sections, rail length L (mm), .... |           | Hole spacing T (mm) | Recommended rail length in accordance with formula $L = n_B \cdot T - 4$<br>Maximum number of holes per drill row $n_B$ |
|---------------------------|---------------------------|----------------|---|---|------------------------------------------------------|-----------|---------------------|-------------------------------------------------------------------------------------------------------------------------|
|                           |                           | N              | H | P | One-piece                                            | Composite |                     |                                                                                                                         |
| <b>20/40<sup>1)</sup></b> | R1675 50                  | 4              | 3 | 2 | 31, ....                                             | 3., ....  | 60                  | 64                                                                                                                      |
| <b>25/70</b>              | R1675 20                  | 4              | 3 | 2 | 31, ....                                             | 3., ....  | 80                  | 48                                                                                                                      |
| <b>35/90</b>              | R1675 30                  | 4              | 3 | 2 | 31, ....                                             | 3., ....  | 80                  | 48                                                                                                                      |
| <b>E.g.:</b>              | R1675 30                  |                | 3 |   | 31, 1676                                             |           |                     |                                                                                                                         |

### Ball guide rails Resist CR

**R1673 .0. ..**

### Options and material numbers

| Size                      | Ball guide rail with size | Accuracy class |   | Number of partial sections, rail length L (mm), .... |                            | Hole spacing T (mm) | Recommended rail length in accordance with formula $L = n_B \cdot T - 4$<br>Maximum number of holes per drill row $n_B$ |
|---------------------------|---------------------------|----------------|---|------------------------------------------------------|----------------------------|---------------------|-------------------------------------------------------------------------------------------------------------------------|
|                           |                           |                | H | One-piece Coated end faces                           | Composite Coated end faces |                     |                                                                                                                         |
| <b>20/40<sup>1)</sup></b> | R1673 50                  |                | 3 | 41, ....                                             | 4., ....                   | 60                  | 64                                                                                                                      |
| <b>25/70</b>              | R1673 20                  |                | 3 | 41, ....                                             | 4., ....                   | 80                  | 48                                                                                                                      |
| <b>35/90</b>              | R1673 30                  |                | 3 | 41, ....                                             | 4., ....                   | 80                  | 48                                                                                                                      |
| <b>E.g.:</b>              | R1673 30                  |                | 3 |                                                      | 42, 5116                   |                     |                                                                                                                         |

1) Caution: Ball guide rail cannot be combined with ball runner block R1671 8.. ..!

### Ordering example 1 (to $L_{\max}$ )

#### Options:

- ▶ Ball guide rail BNS
- ▶ Size 35/90
- ▶ Accuracy class H
- ▶ One-piece
- ▶ End faces coated
- ▶ Rail length L = 1676 mm


Material number: R1675 303 41, 1676 mm

### Ordering example 2 (above $L_{\max}$ )

#### Options:

- ▶ Ball guide rail CR, BNS
- ▶ Size 35/90
- ▶ Accuracy class H
- ▶ **2 partial sections**
- ▶ End faces coated
- ▶ Rail length L = 5116 mm


Material number: R1673 303 42, 5116 mm

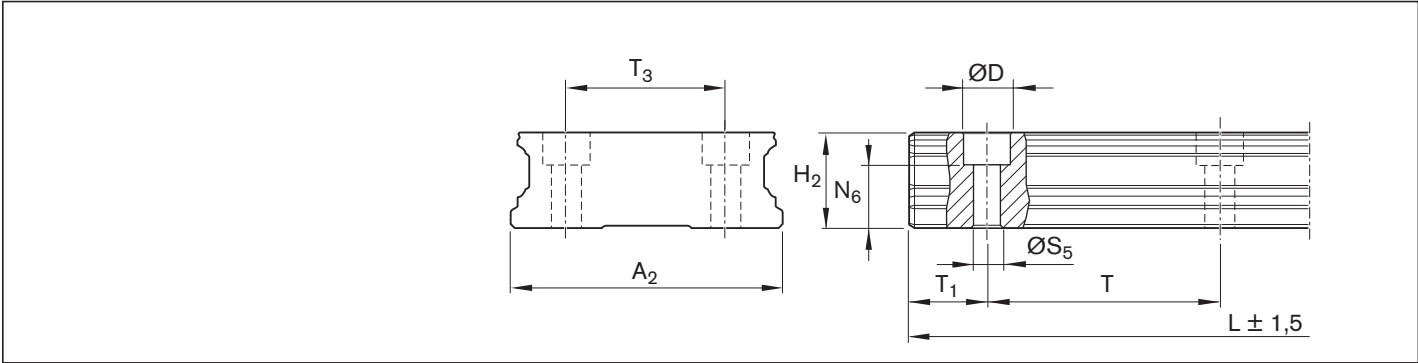

| Size  | Dimensions (mm) |      |                     |           |                 |       |    |            |                        |            |       | Mass<br>(kg/m) |
|-------|-----------------|------|---------------------|-----------|-----------------|-------|----|------------|------------------------|------------|-------|----------------|
|       | $A_2$           | D    | $H_2$ <sup>1)</sup> | $L_{max}$ | $N_6$ $\pm 0,5$ | $S_5$ | T  | $T_{1min}$ | $T_{1S}$ <sup>2)</sup> | $T_{1max}$ | $T_3$ |                |
| 20/40 | 42              | 7.4  | 18.30               | 3 836     | 12.45           | 4.4   | 60 | 10         | 28                     | 50         | 24    | 5.3            |
| 25/70 | 69              | 11.0 | 23.55               | 3 836     | 14.50           | 7.0   | 80 | 10         | 38                     | 70         | 40    | 11.6           |
| 35/90 | 90              | 15.0 | 31.85               | 3 836     | 20.50           | 9.0   | 80 | 12         | 38                     | 68         | 60    | 21.0           |

- 1) Dimension  $H_2$  without cover strip  
2) Recommended: preferred dimension  $T_{1S}$  with tolerances  $\pm 0.75$ .

## BNS with caps made of steel

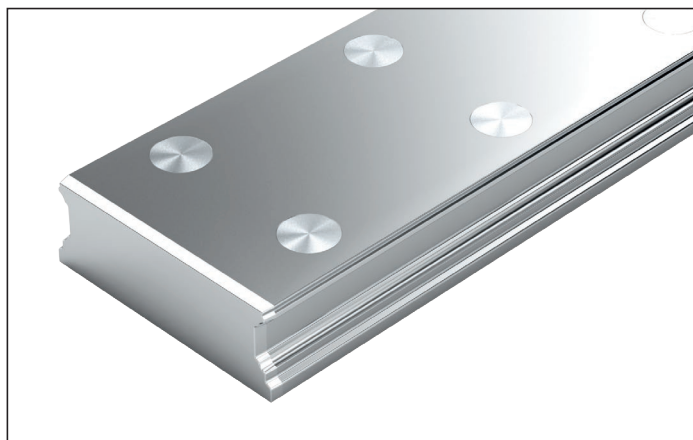

**Ball guide rails made of steel R1676 .5. ..**  
**With two-row hole pattern, for bolting from above**  
**with caps made of steel**

### Notes

- ▶ Caps made of steel not included in scope of delivery.
- ▶ Observe the instruction for mounting!  
Please request the "Mounting instructions for ball rail systems".
- ▶ Composite ball guide rail also available.

### Accessories

- ▶ Caps, mounting tool for caps see chapter "Accessories for ball guide rails"

### Options and material numbers

| Size  | Ball guide rail with size | Accuracy class |   |   | Number of partial sections, rail length L (mm), ... |           | Hole spacing T (mm) | Recommended rail length in accordance with formula $L = n_B \cdot T - 4$ |
|-------|---------------------------|----------------|---|---|-----------------------------------------------------|-----------|---------------------|--------------------------------------------------------------------------|
|       |                           | N              | H | P | One-piece                                           | Composite |                     |                                                                          |
| 25/70 | R1676 25                  | 4              | 3 | 2 | 31, ...                                             | 3., ...   | 80                  | 48                                                                       |
| 35/90 | R1676 35                  | 4              | 3 | 2 | 31, ...                                             | 3., ...   | 80                  | 48                                                                       |
| E.g.: | R1676 35                  |                | 3 |   | 31, 1676                                            |           |                     |                                                                          |

### Ordering example 1 (to $L_{\max}$ )

#### Options:

- ▶ Ball guide rail BNS
- ▶ Size 35/90
- ▶ Accuracy class H
- ▶ One-piece
- ▶ Rail length L = 1676 mm


Material number: R1676 353 31, 1676 mm

### Ordering example 2 (above $L_{\max}$ )

#### Options:

- ▶ Ball guide rail BNS
- ▶ Size 35/90
- ▶ Accuracy class H
- ▶ **2 partial sections**
- ▶ Rail length L = 5116 mm

Material number: R1676 353 **32**, 5116 mm

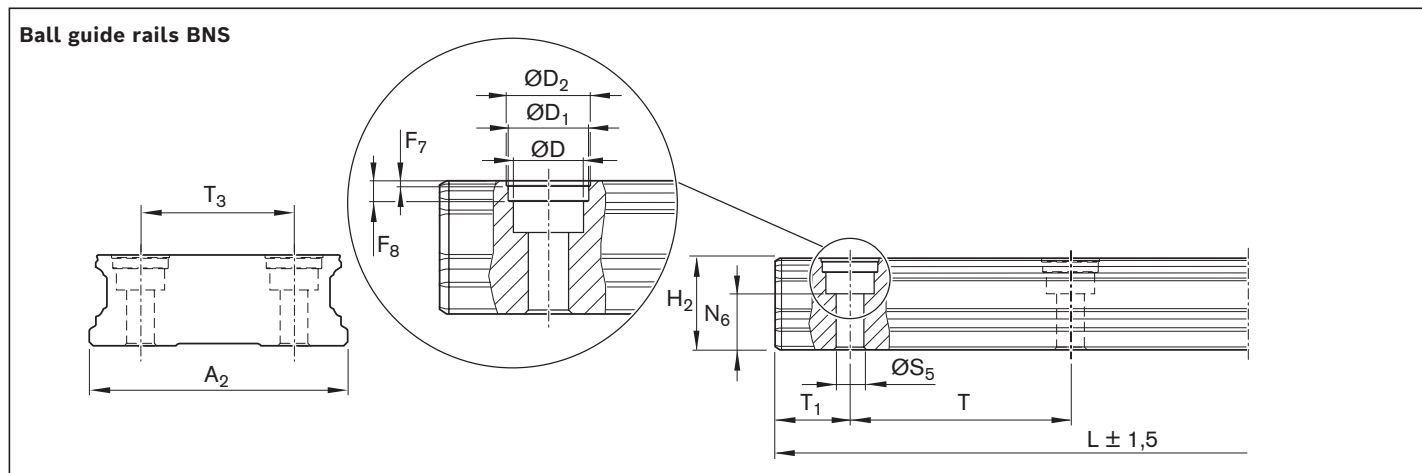


| Size  | Dimensions (mm) |      |                |                |                |                |                              |                  |                                |                |    |                    |                               |                    |                | Mass<br>(kg/m) |
|-------|-----------------|------|----------------|----------------|----------------|----------------|------------------------------|------------------|--------------------------------|----------------|----|--------------------|-------------------------------|--------------------|----------------|----------------|
|       | A <sub>2</sub>  | D    | D <sub>1</sub> | D <sub>2</sub> | F <sub>7</sub> | F <sub>8</sub> | H <sub>2</sub> <sup>1)</sup> | L <sub>max</sub> | N <sub>6</sub> <sup>±0.5</sup> | S <sub>5</sub> | T  | T <sub>1 min</sub> | T <sub>1S</sub> <sup>2)</sup> | T <sub>1 max</sub> | T <sub>3</sub> |                |
| 25/70 | 69              | 11.0 | 12.55          | 13             | 0.9            | 3.7            | 23.55                        | 3 836            | 14.5                           | 7.0            | 80 | 10                 | 38                            | 70                 | 40             | 11.6           |
| 35/90 | 90              | 15.0 | 17.55          | 18             | 0.9            | 3.6            | 31.85                        | 3 836            | 20.5                           | 9.0            | 80 | 12                 | 38                            | 68                 | 60             | 21.0           |

1) Dimension H<sub>2</sub> without cover strip

2) Recommended: preferred dimension T<sub>1S</sub> with tolerances ±0.75.



## BNS for bolting from below

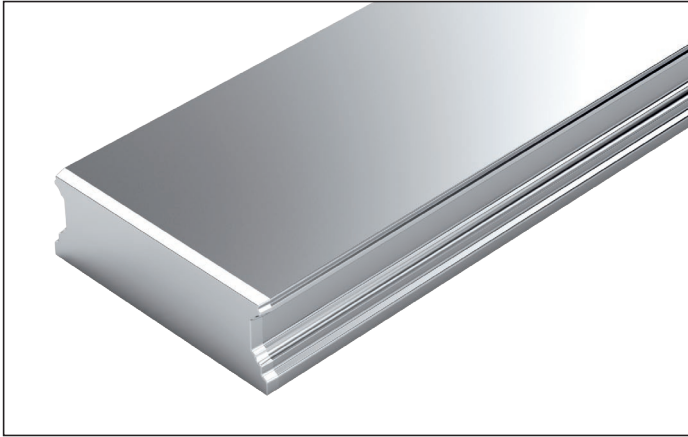

**Ball guide rails made of steel R1677 .0. ..**

**With double-row hole pattern for bolting from below**

### Notes

- Observe the instruction for mounting!  
Please request the "Mounting instructions for ball rail systems".
- Composite ball guide rail also available.

### Options and material numbers

| Size                | Ball guide rail with size | Accuracy class |   |   | Number of partial sections, rail length L (mm), ... |           | Hole spacing T (mm) | Recommended rail length in accordance with formula $L = n_B \cdot T - 4$ |
|---------------------|---------------------------|----------------|---|---|-----------------------------------------------------|-----------|---------------------|--------------------------------------------------------------------------|
|                     |                           | N              | H | P | One-piece                                           | Composite |                     |                                                                          |
| 20/40 <sup>1)</sup> | R1677 50                  | 4              | 3 | 2 | 31, ....                                            | 3., ....  | 60                  | 64                                                                       |
| 25/70               | R1677 20                  | 4              | 3 | 2 | 31, ....                                            | 3., ....  | 80                  | 48                                                                       |
| 35/90               | R1677 30                  | 4              | 3 | 2 | 31, ....                                            | 3., ....  | 80                  | 48                                                                       |
| E.g.:               | R1677 30                  | 3              |   |   | 31, 1676                                            |           |                     |                                                                          |

1) Caution: Ball guide rail cannot be combined with ball runner block R1671 8.. ...!

### Ordering example 1 (to $L_{\max}$ )

#### Options:

- Ball guide rail BNS,
- Size 35/90,
- Accuracy class H,
- One-piece
- Rail length  $L = 1676$  mm

Material number: R1677 303 31, 1676 mm


### Ordering example 2 (above $L_{\max}$ )

#### Options:

- Ball guide rail BNS,
- Size 35/90,
- Accuracy class H,
- 2 partial sections
- Rail length  $L = 5116$  mm

Material number: R1677 303 32, 5116 mm

### Ball guide rails BNS

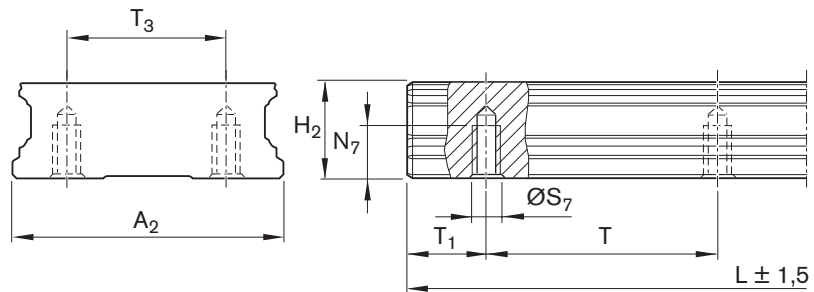

| Size  | Dimensions (mm) |            |            |       |       |     |             |               |             |       | Mass (kg/m) |
|-------|-----------------|------------|------------|-------|-------|-----|-------------|---------------|-------------|-------|-------------|
|       | $A_2$           | $H_2^{1)}$ | $L_{\max}$ | $N_7$ | $S_7$ | $T$ | $T_{1\min}$ | $T_{1s}^{2)}$ | $T_{1\max}$ | $T_3$ |             |
| 20/40 | 42              | 18.30      | 3 836      | 7.5   | M5    | 60  | 10          | 28            | 50          | 24    | 5.3         |
| 25/70 | 69              | 23.55      | 3 836      | 12.0  | M6    | 80  | 10          | 38            | 70          | 40    | 11.6        |
| 35/90 | 90              | 31.85      | 3 836      | 15.0  | M8    | 80  | 12          | 38            | 68          | 60    | 21.0        |


1) Dimension  $H_2$  without cover strip

2) Recommended: preferred dimension  $T_{1s}$  with tolerances  $\pm 0.75$ .

# Product description


Rexroth offers limitless interchangeability as all ball runner block versions can be combined at will with all accessories within each size. The entire range is ideally geared to enable a top performance and meet all special requirements. Accessories can also be supplied ready-mounted on request.

## Overview of ball runner block accessories

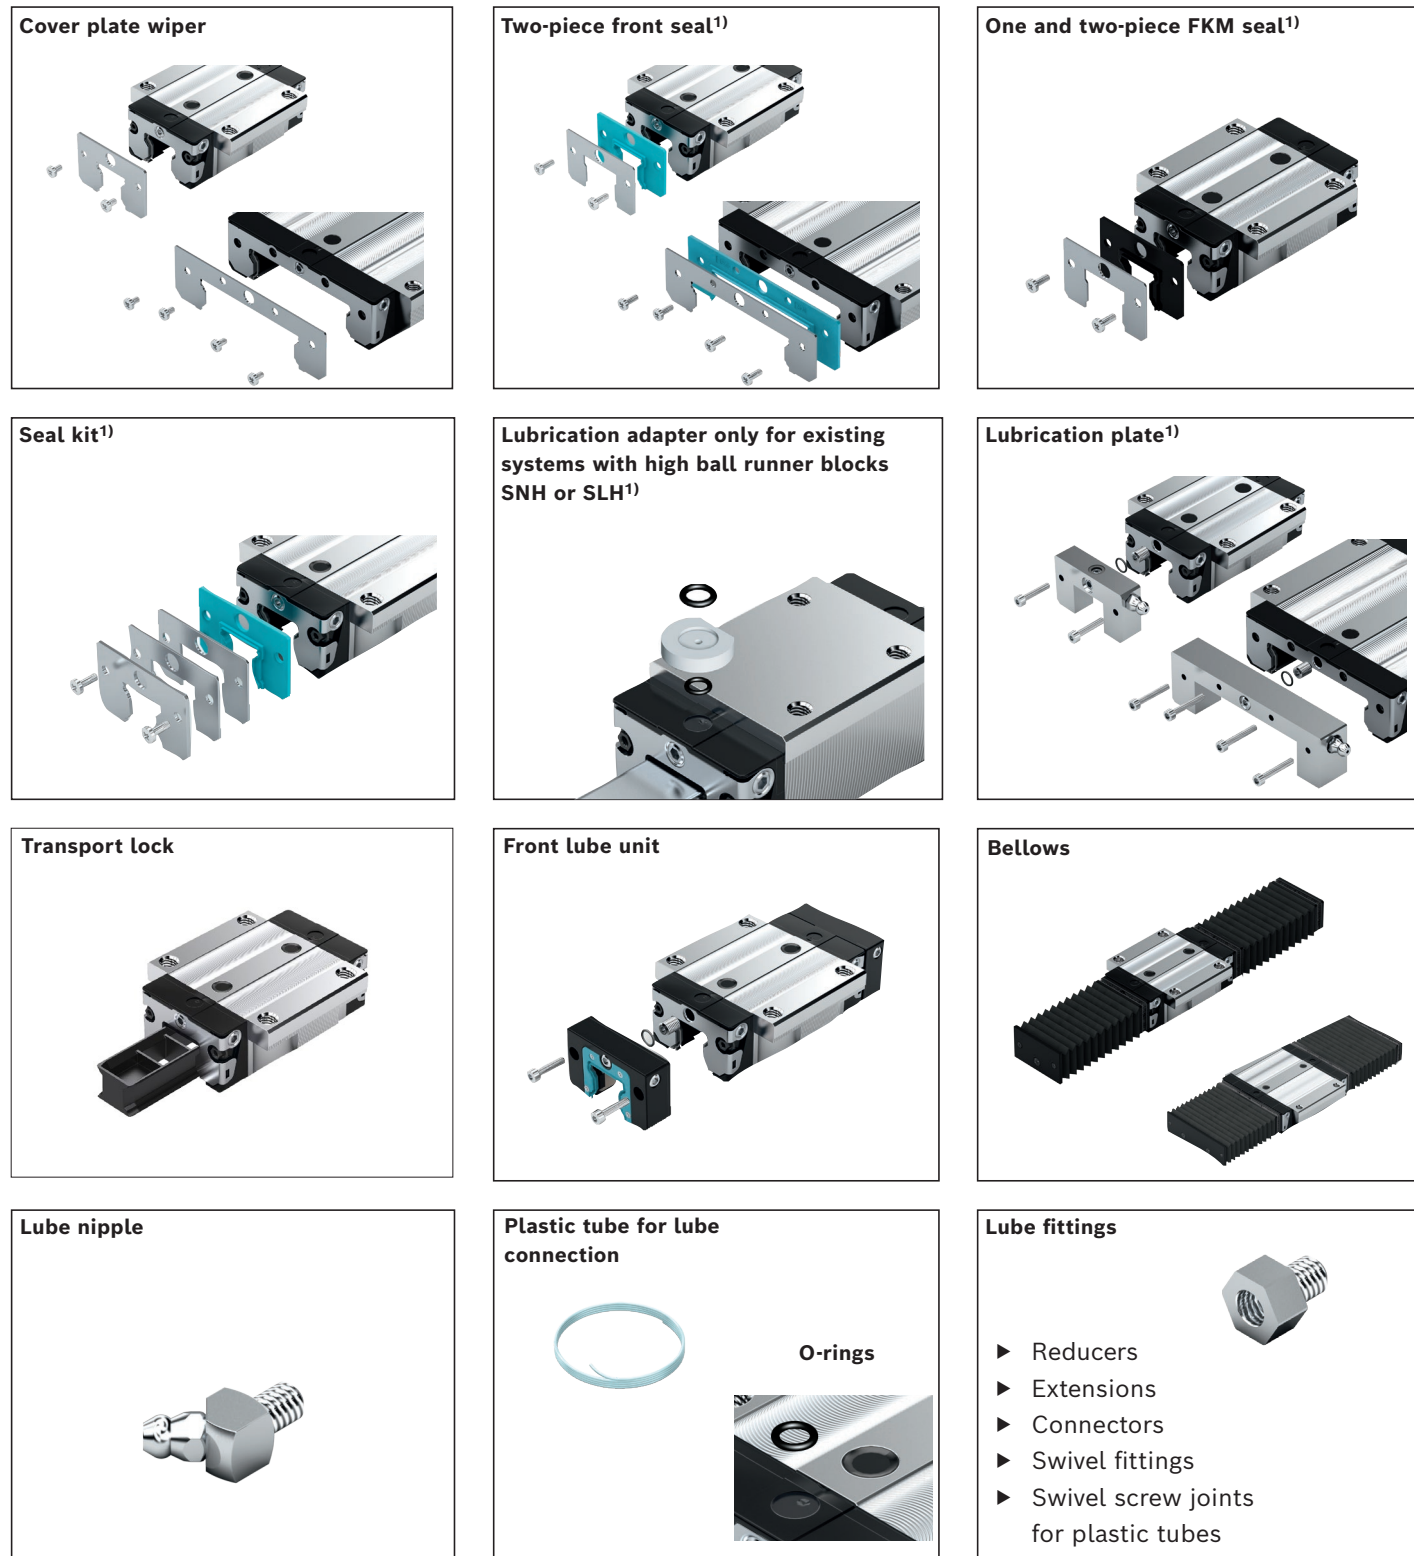

<sup>1)</sup> Not available for ball runner blocks F.N (flange ... low) and S.N. (slimline ... low)

## Cover plate wiper

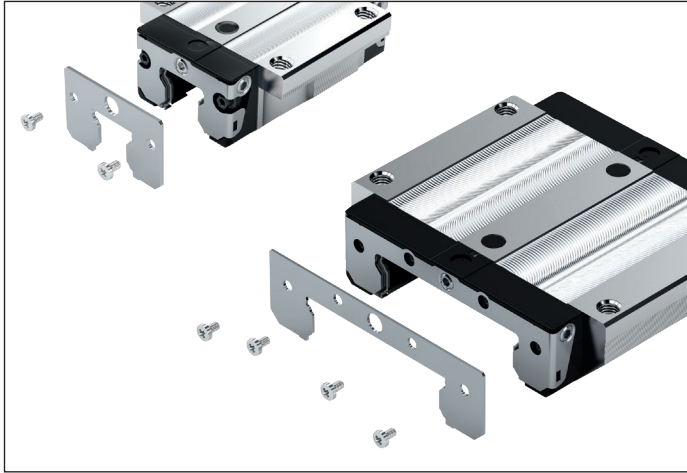


### Cover plate wiper R16.0 .10 ..

- Material: Corrosion-resistant steel as per EN 10088
- Design: bright
- Precision design with a maximum gap dimension of 0.1 to 0.3 mm

### Instruction for mounting

- When combining with two-piece front seals, use seal kit: See seal kit for material numbers
- The fastening screws are included.
- When mounting, make sure that there is a uniform gap between the ball guide rail and the cover plate wiper.
- Observe the minimum screw-in depth for the end-face lube connection.
- Observe the mounting instructions.

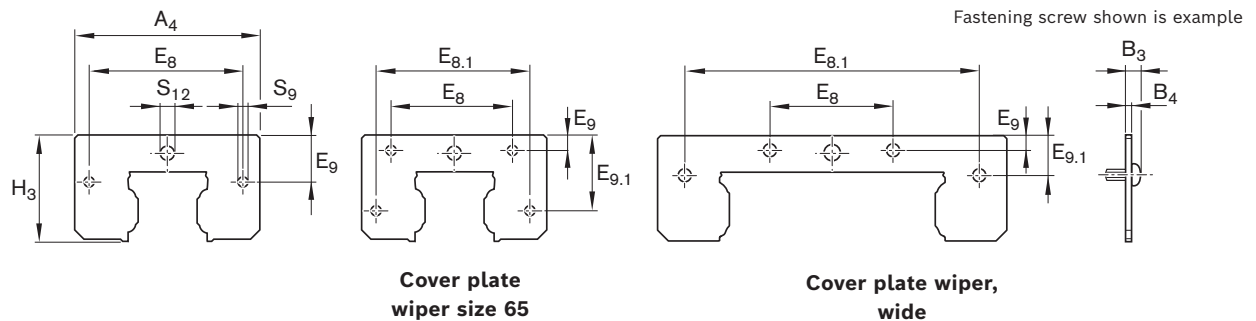

| Size                  | Material number for ball guide rail with cover strip | Dimensions (mm) |                |                |                |                  |                |                  |                |                |                 | Mass (g) |
|-----------------------|------------------------------------------------------|-----------------|----------------|----------------|----------------|------------------|----------------|------------------|----------------|----------------|-----------------|----------|
|                       |                                                      | A <sub>4</sub>  | B <sub>3</sub> | B <sub>4</sub> | E <sub>8</sub> | E <sub>8.1</sub> | E <sub>9</sub> | E <sub>9.1</sub> | H <sub>3</sub> | S <sub>9</sub> | S <sub>12</sub> |          |
| 15                    | R1620 110 30                                         | 33.0            | 3.1            | 1.0            | 24.55          | –                | 6.30           | –                | 19.2           | 3.5            | 4.6             | 5        |
| 20                    | R1620 810 30                                         | 42.0            | 3.4            | 1.0            | 32.40          | –                | 6.80           | –                | 24.8           | 4.0            | 5.1             | 6        |
|                       | R1620 810 35 <sup>3)</sup>                           | 41.0            | 3.4            | 1.0            | 30.50          | –                | 5.10           | –                | 22.8           | 4.0            | 4.0             | 5        |
| 25                    | R1620 210 30                                         | 47.0            | 3.4            | 1.0            | 38.30          | –                | 11.00          | –                | 29.5           | 4.0            | 7.0             | 8        |
|                       | R1620 210 35 <sup>3)</sup>                           | 47.0            | 3.4            | 1.0            | 38.30          | –                | 8.00           | –                | 26.5           | 4.0            | 4.0             | 7        |
| 30                    | R1620 710 30                                         | 59.0            | 3.4            | 1.0            | 48.40          | –                | 14.10          | –                | 34.7           | 4.0            | 7.0             | 12       |
| 35                    | R1620 310 40 <sup>1)</sup>                           | 69.0            | 3.4            | 1.0            | 58.00          | –                | 17.00          | –                | 40.1           | 4.0            | 7.0             | 16       |
| 45                    | R1620 410 40 <sup>1)</sup>                           | 85.0            | 5.1            | 2.0            | 69.80          | –                | 20.50          | –                | 50.0           | 5.0            | 7.0             | 50       |
| 55                    | R1620 510 40 <sup>1)</sup>                           | 98.0            | 5.7            | 2.0            | 80.00          | –                | 21.80          | –                | 56.4           | 6.0            | 7.0             | 65       |
| 65                    | R1620 610 40 <sup>1)</sup>                           | 124.0           | 5.6            | 2.5            | 76.00          | 100.0            | 10.00          | 52.50            | 74.7           | 5.0            | 9.0             | 140      |
| 20/40 <sup>4)5)</sup> | R1670 510 00 <sup>2)</sup>                           | 60.0            | 3.1            | 1.0            | 18.00          | 53.4             | 2.65           | 7.35             | 21.7           | 3.5            | 4.0             | 7        |
| 25/70 <sup>4)</sup>   | R1670 210 10 <sup>2)</sup>                           | 101.0           | 3.4            | 1.0            | 35.00          | 83.5             | 4.35           | 10.75            | 29.1           | 4.0            | 7.0             | 14       |
| 35/90 <sup>4)</sup>   | R1670 310 10 <sup>2)</sup>                           | 129.0           | 3.4            | 1.0            | 79.00          | 116.0            | 5.60           | 28.70            | 40.8           | 4.0            | 7.0             | 25       |

1) Material number for ball guide rail **without** cover strip: R1620 .10 30


2) Ball guide rail **without** cover strip

3) For ball runner blocks F.N (flange ... low) and S.N. (slimline ... low)

4) Wide ball rail system

5) Caution: Cover plate wiper, not combinable with ball guide rail R167.8.. ..!

## Front seal

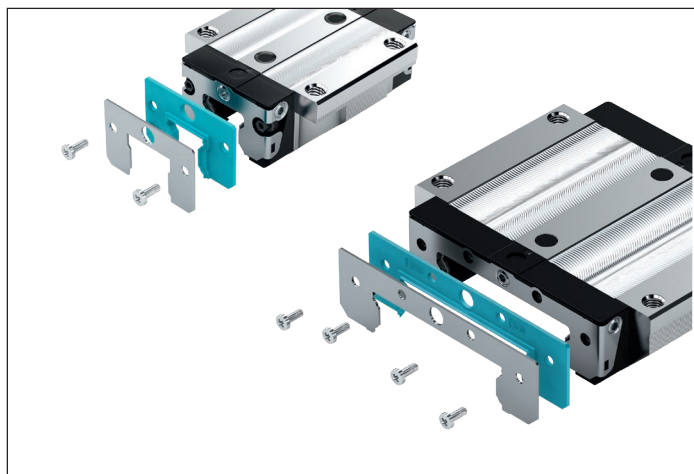


### Two-piece

- Material: Corrosion-resistant steel as per DIN EN 10088 with plastic seal ring
- Design: bright

### Instruction for mounting

- The fastening screws are included.
- Observe the minimum screw-in depth for the end-face lube connection.
- Observe the mounting instructions.

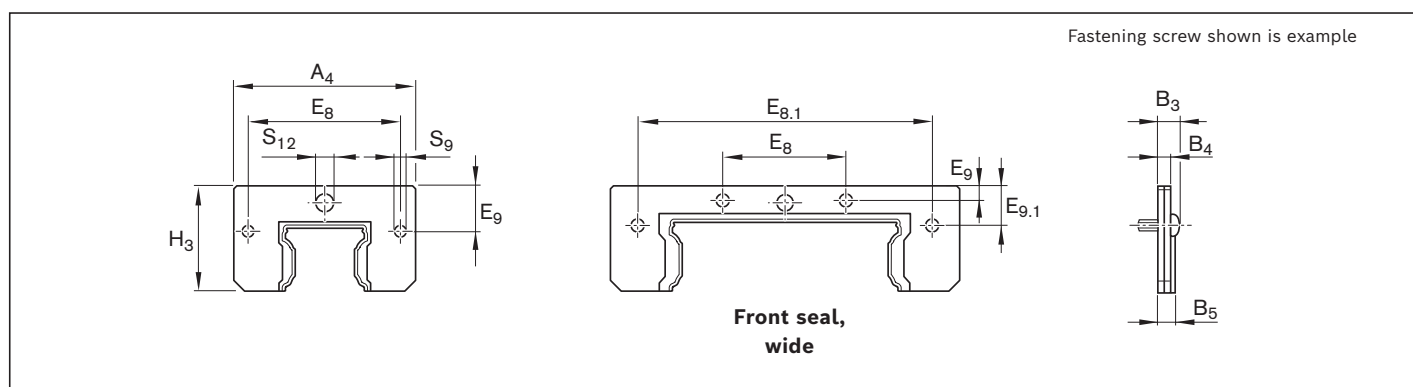


| Size                        | Material number | Dimensions (mm) |                |                |                |                |                  |                |                  |                |                |                 | Mass (g) |
|-----------------------------|-----------------|-----------------|----------------|----------------|----------------|----------------|------------------|----------------|------------------|----------------|----------------|-----------------|----------|
|                             |                 | A <sub>4</sub>  | B <sub>3</sub> | B <sub>4</sub> | B <sub>5</sub> | E <sub>8</sub> | E <sub>8.1</sub> | E <sub>9</sub> | E <sub>9.1</sub> | H <sub>3</sub> | S <sub>9</sub> | S <sub>12</sub> |          |
| <b>15</b>                   | R1619 121 20    | 32.0            | 4.3            | 2.2            | 3.0            | 24.55          | –                | 6.30           | –                | 19.0           | 3.5            | 4.3             | 6.0      |
| <b>20<sup>1)</sup></b>      | R1619 821 20    | 42.0            | 4.9            | 2.5            | 3.3            | 32.40          | –                | 6.80           | –                | 24.3           | 4.0            | 5.1             | 8.0      |
| <b>25<sup>1)</sup></b>      | R1619 221 30    | 47.0            | 4.9            | 2.5            | 3.3            | 38.30          | –                | 11.00          | –                | 29.0           | 4.0            | 7.0             | 10.0     |
| <b>30</b>                   | R1619 721 30    | 59.0            | 5.7            | 3.3            | 4.5            | 48.40          | –                | 14.10          | –                | 34.5           | 4.0            | 7.0             | 18.0     |
| <b>35</b>                   | R1619 321 30    | 69.0            | 5.7            | 3.3            | 4.5            | 58.00          | –                | 17.00          | –                | 39.5           | 4.0            | 7.0             | 25.0     |
| <b>45</b>                   | R1619 421 30    | 85.0            | 7.1            | 4.0            | 5.5            | 69.80          | –                | 20.50          | –                | 49.5           | 5.0            | 7.0             | 55.0     |
| <b>55</b>                   | R1619 521 30    | 98.0            | 7.7            | 4.0            | 5.5            | 80.00          | –                | 21.50          | –                | 56.0           | 6.0            | 7.0             | 65.0     |
| <b>20/40<sup>2)3)</sup></b> | R1619 522 20    | 60.0            | 4.6            | 2.5            | 3.3            | 18.00          | 53.4             | 2.65           | 7.35             | 21.7           | 3.5            | 4.0             | 7.5      |
| <b>25/70<sup>2)</sup></b>   | R1619 222 20    | 99.0            | 4.9            | 2.5            | 3.3            | 35.00          | 83.5             | 4.30           | 10.70            | 28.6           | 4.0            | 7.3             | 14.5     |
| <b>35/90<sup>2)</sup></b>   | R1619 322 20    | 128.6           | 5.7            | 3.3            | 4.5            | 79.00          | 116.0            | 5.80           | 28.90            | 41.0           | 4.0            | 7.0             | 40.0     |

**1)** Not for ball runner blocks F.N (flange ... low) and S.N (slimline ... low)

**2)** Wide ball rail system

**3)** Caution: The new front seal is not combinable with existing ball guide rail R167. 8.. ..!

## FKM seal

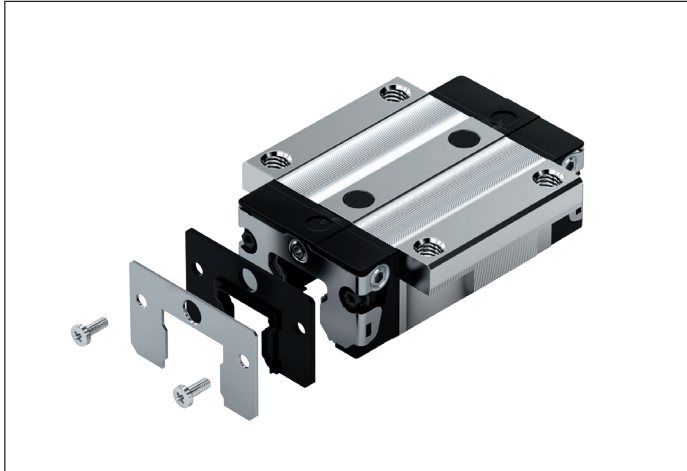


- Material: Corrosion-resistant steel as per DIN EN 10088 and seal made of FKM
- See Selection criteria/Seals for the area of application and resistance

### Special feature

Simple mounting and dismounting at fastened ball guide rail.

### Instruction for mounting

- The fastening screws are included.
- Observe the minimum screw-in depth for the end-face lube connection.
- Observe the mounting instructions.

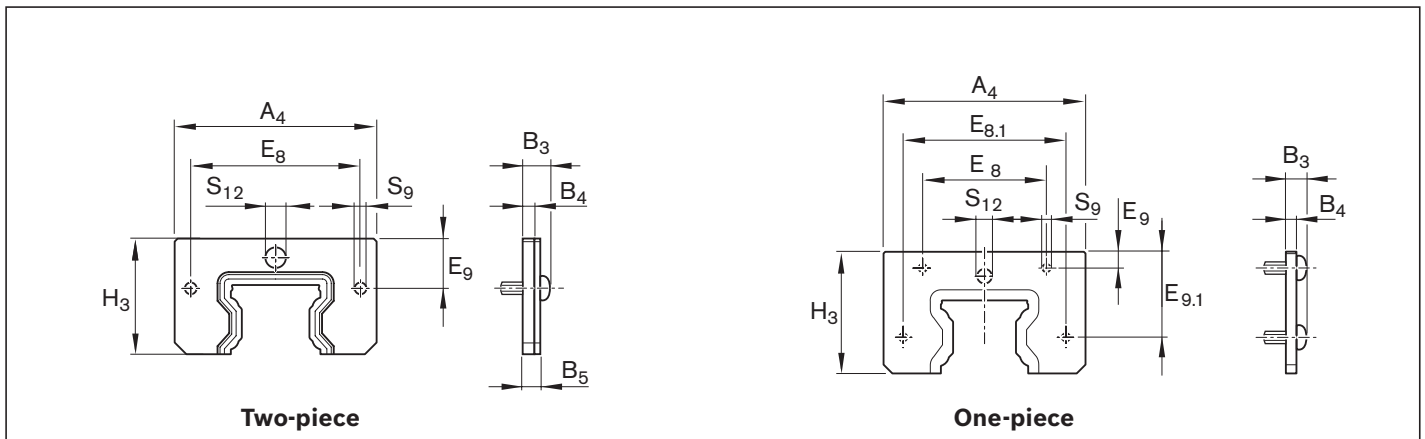


### Two-piece

| Size | Material number | Dimensions (mm) |                |                |                |                |                |                |                |                 | Mass (g) |
|------|-----------------|-----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------|----------|
|      |                 | A <sub>4</sub>  | B <sub>3</sub> | B <sub>4</sub> | B <sub>5</sub> | E <sub>8</sub> | E <sub>9</sub> | H <sub>3</sub> | S <sub>9</sub> | S <sub>12</sub> |          |
| 15   | R1619 120 30    | 32              | 6.1            | 2.5            | 4              | 24.55          | 7.4            | 19.0           | 3.5            | 4.3             | 5.6      |
| 20   | R1619 820 30    | 42              | 7.4            | 3              | 5              | 32.5           | 10.3           | 24.3           | 4              | 4.3             | 10.3     |
| 25   | R1619 220 30    | 47              | 7.4            | 3              | 5              | 38.3           | 9.9            | 29.0           | 4              | 7               | 19.7     |
| 30   | R1619 720 30    | 59              | 8.4            | 4              | 6              | 48.4           | 10.95          | 34.5           | 4              | 7               | 32.8     |
| 35   | R1619 320 30    | 69              | 8.4            | 4              | 6              | 58.0           | 17.0           | 39.5           | 4              | 7               | 39.0     |
| 45   | R1619 420 30    | 85              | 9.1            | 4              | 6              | 69.8           | 20.5           | 49.5           | 5              | 7               | 61.0     |
| 55   | R1619 520 30    | 98              | 9.7            | 4              | 6              | 80.0           | 21.8           | 56.4           | 6              | 7               | 80.5     |

### One-piece

| Size | Material number | Dimensions (mm) |                |                |                |                  |                |                  |                |                |                 | Mass<br>(g) |
|------|-----------------|-----------------|----------------|----------------|----------------|------------------|----------------|------------------|----------------|----------------|-----------------|-------------|
|      |                 | A <sub>4</sub>  | B <sub>3</sub> | B <sub>4</sub> | E <sub>8</sub> | E <sub>8.1</sub> | E <sub>9</sub> | E <sub>9.1</sub> | H <sub>3</sub> | S <sub>9</sub> | S <sub>12</sub> |             |
| 65   | R1619 620 30    | 124             | 9.6            | 6.5            | 76             | 100              | 10             | 52.5             | 74.7           | 5              | 9               | 146         |


Seal kit

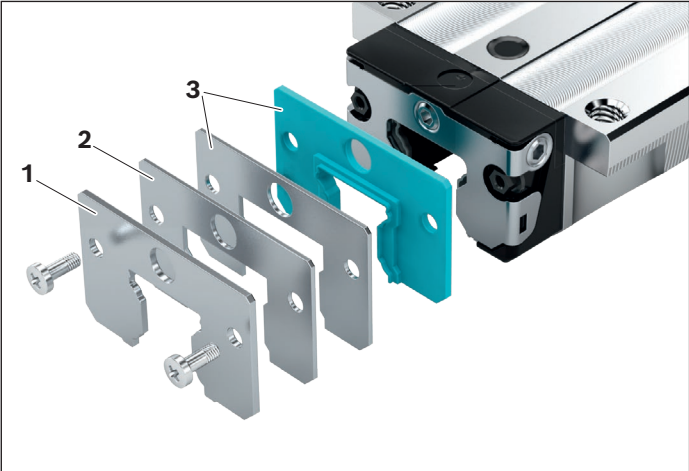

- 1 Cover plate wiper
- 2 Reinforcing plate
- 3 Two-piece front seal

Instruction for mounting


- ▶ The seal kit is recommended when combining the cover plate wiper with a two-piece front seal.
- ▶ The fastening screws are included.
- ▶ Observe the minimum screw-in depth for the end-face lube connection.
- ▶ Observe the mounting instructions.

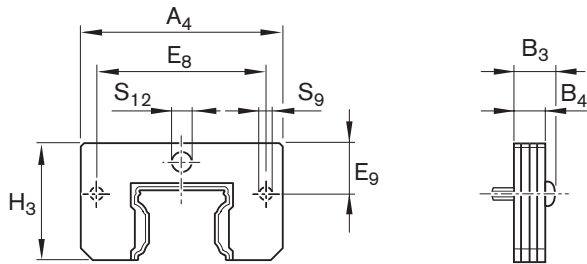

| Size             | Material number for ball guide rail |                  | Dimensions (mm) |                |                |                |                |                |                |                 |     | Mass<br>(g) |
|------------------|-------------------------------------|------------------|-----------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------|-----|-------------|
|                  | without cover strip                 | with cover strip | A <sub>4</sub>  | B <sub>3</sub> | B <sub>4</sub> | E <sub>8</sub> | E <sub>9</sub> | H <sub>3</sub> | S <sub>9</sub> | S <sub>12</sub> |     |             |
| 15               | R1619 120 50                        | R1619 120 50     | 32.0            | 6.3            | 4.2            | 24.55          | 6.30           | 19.0           | 3.5            | 4.3             | 16  |             |
| 20 <sup>1)</sup> | R1619 820 50                        | R1619 820 50     | 42.0            | 6.9            | 4.5            | 32.40          | 6.80           | 24.3           | 4.0            | 5.1             | 20  |             |
| 25 <sup>1)</sup> | R1619 220 50                        | R1619 220 50     | 47.0            | 6.9            | 4.5            | 38.30          | 11.00          | 29.0           | 4.0            | 7.0             | 26  |             |
| 30               | R1619 720 50                        | R1619 720 50     | 59.0            | 8.2            | 5.8            | 48.40          | 14.10          | 34.5           | 4.0            | 7.0             | 42  |             |
| 35               | R1619 320 40                        | R1619 320 50     | 69.0            | 8.2            | 5.8            | 58.00          | 17.00          | 39.5           | 4.0            | 7.0             | 57  |             |
| 45               | R1619 420 40                        | R1619 420 50     | 85.0            | 11.1           | 8.0            | 69.80          | 20.50          | 49.5           | 5.0            | 7.0             | 155 |             |
| 55               | R1619 520 40                        | R1619 520 50     | 98.0            | 11.7           | 8.0            | 80.00          | 21.50          | 56.0           | 6.0            | 7.0             | 195 |             |

1) Not for ball runner blocks F.N (flange ... low) and S.N (slimline ... low)

## Lubrication adapter

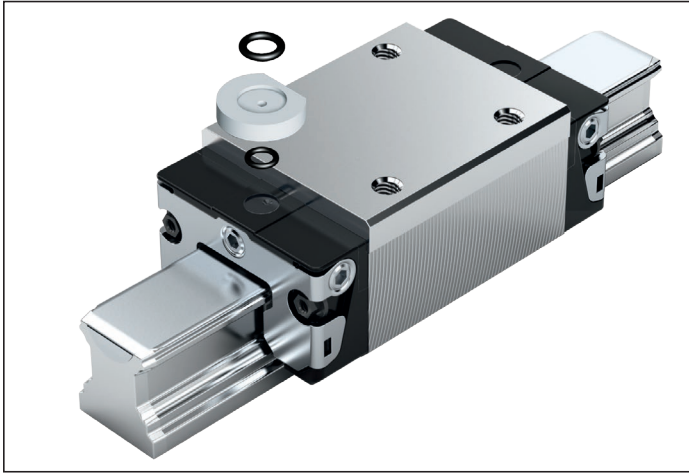


**For oil and grease lubrication from above,  
only for high ball runner blocks  
SNH R1621 or SLH R1624**

- ▶ Material: Plastic
- ▶ Packaging unit: 1 unit

### Instruction for mounting


- ▶ O-rings are provided.
- ▶ Before mounting, use a heated pointed metal tool to open the lube port on the ball runner block (but not a drill).
- ▶ For details, see chapter "Lubrication and maintenance".

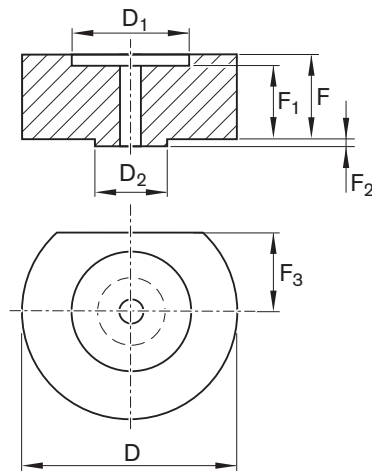

| Size      | Material number | Dimensions (mm) |                |                |     |                |                |                | Mass (g) |
|-----------|-----------------|-----------------|----------------|----------------|-----|----------------|----------------|----------------|----------|
|           |                 | D               | D <sub>1</sub> | D <sub>2</sub> | F   | F <sub>1</sub> | F <sub>2</sub> | F <sub>3</sub> |          |
| <b>15</b> | R1621 100 05    | 12              | 6.2            | 3.4            | 3.7 | 3.1            | 0.5            | 3.20           | 0.5      |
| <b>25</b> | R1621 200 05    | 15              | 7.2            | 4.4            | 3.8 | 3.2            | 0.5            | 5.85           | 0.9      |
| <b>30</b> | R1621 700 05    | 16              | 7.2            | 4.4            | 2.8 | 2.2            | 0.5            | 6.10           | 0.7      |
| <b>35</b> | R1621 300 05    | 18              | 7.2            | 4.4            | 6.8 | 6.2            | 0.5            | 6.80           | 2.2      |
| <b>45</b> | R1621 400 05    | 20              | 7.2            | 4.4            | 9.8 | 9.2            | 0.5            | 8.30           | 4.1      |



# Lubrication plate

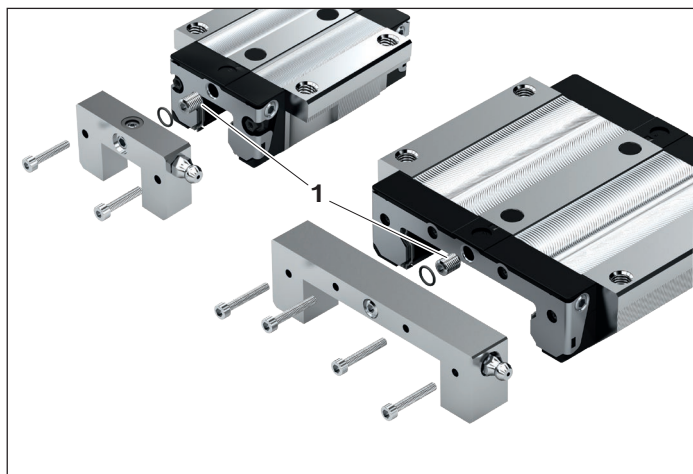


## For standard lube nipples

- Material: Aluminum

## Instruction for mounting

- The required mounting parts are included.
- Size 15 - 20:  
A funnel-type lube nipple with a knock-in spigot is included.
- Sizes 25 - 65:  
The lube nipple of the ball runner block can be used.
- Observe the mounting instructions.

**⚠** The enclosed lube pin (1) must be mounted between the lubrication plate and the ball runner block! (It contains a lube port.)

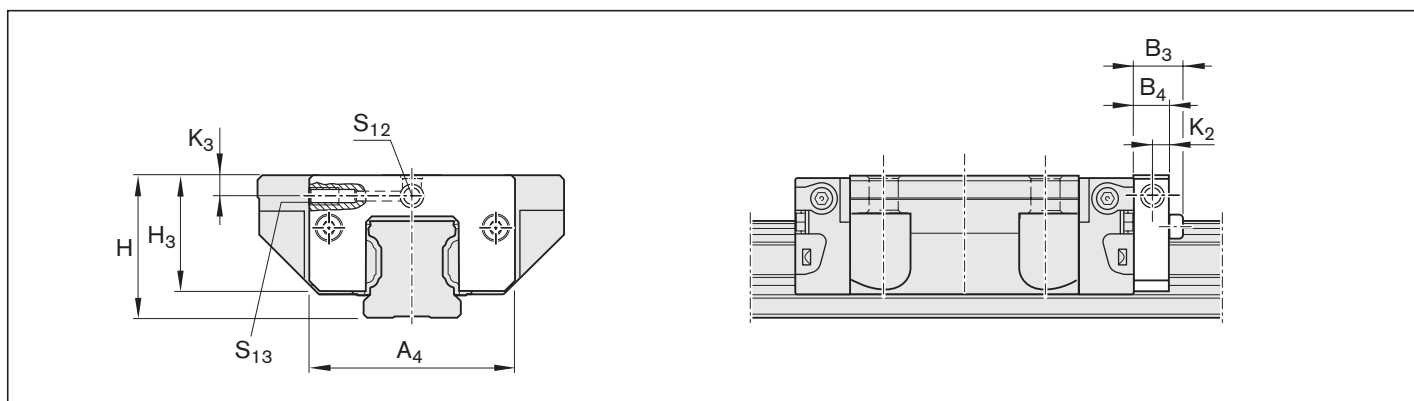

| Size                   | Material number | Dimensions (mm) |                |                |                        |                              |                |                              |                 |                 | Mass (g) |
|------------------------|-----------------|-----------------|----------------|----------------|------------------------|------------------------------|----------------|------------------------------|-----------------|-----------------|----------|
|                        |                 | A <sub>4</sub>  | B <sub>3</sub> | B <sub>4</sub> | H                      | H <sub>3</sub> <sup>2)</sup> | K <sub>2</sub> | K <sub>3</sub> <sup>2)</sup> | S <sub>12</sub> | S <sub>13</sub> |          |
| <b>15</b>              | R1620 111 20    | 32              | 13.1           | 11             | 24<br>28 <sup>3)</sup> | 19.0                         | 5.5            | 3.4<br>7.4 <sup>3)</sup>     | M3              | Ø3              | 15       |
| <b>20<sup>1)</sup></b> | R1620 811 20    | 42              | 15.0           | 12             | 30                     | 24.8                         | 6.0            | 3.5                          | M3              | Ø3              | 25       |
| <b>25<sup>1)</sup></b> | R1620 211 20    | 47              | 15.0           | 12             | 36<br>40 <sup>3)</sup> | 28.3                         | 6.0            | 6.0<br>10.0 <sup>3)</sup>    | M6              | M6              | 30       |
| <b>30</b>              | R1620 711 20    | 59              | 15.0           | 12             | 42<br>45 <sup>3)</sup> | 33.8                         | 6.0            | 8.0<br>11.0 <sup>3)</sup>    | M6              | M6              | 45       |
| <b>35</b>              | R1620 311 20    | 69              | 15.0           | 12             | 48<br>55 <sup>3)</sup> | 39.1                         | 6.0            | 8.0<br>15.0 <sup>3)</sup>    | M6              | M6              | 60       |
| <b>45</b>              | R1620 411 20    | 85              | 16.0           | 12             | 60<br>70 <sup>3)</sup> | 48.5                         | 6.0            | 8.0<br>18.0 <sup>3)</sup>    | M6              | M6              | 85       |
| <b>55</b>              | R1620 511 20    | 98              | 17.0           | 12             | 70<br>80 <sup>3)</sup> | 56.0                         | 6.0            | 9.0<br>19.0 <sup>3)</sup>    | M6              | M6              | 115      |
| <b>65</b>              | R1620 611 20    | 124             | 18.0           | 14             | 90                     | 75.7                         | 7.0            | 18.0                         | M8x1            | M8x1            | 250      |

**1)** Not for ball runner blocks F.N (flange ... low) and S.N (slimline ... low)

**2)** Based on the mounting face of the ball runner block

**3)** For ball runner blocks S.H (slimline ... high)




# Lubrication plate G 1/8

## For lube nipples G 1/8

- Material: Aluminum

### Instruction for mounting

- The required mounting parts are included.
- Ball runner block S.. (slimline ... ..)  
Size 25: Observe the side projection of the lubrication plate.
- Observe the mounting instructions.

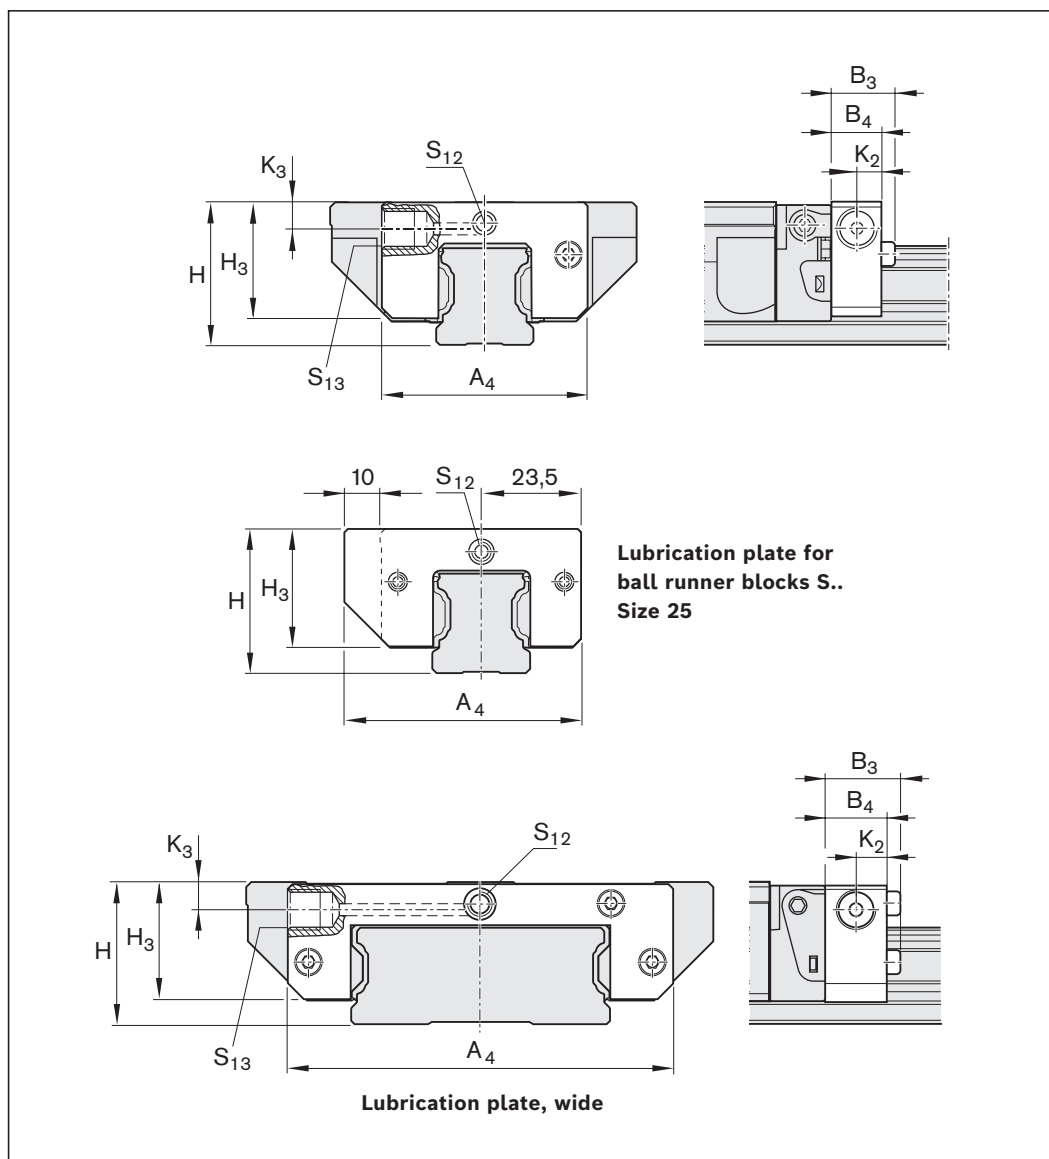

| Size                | Material number | Dimensions (mm) |                |                |                        |                              |                |                              |                 |                 | Mass (g) |
|---------------------|-----------------|-----------------|----------------|----------------|------------------------|------------------------------|----------------|------------------------------|-----------------|-----------------|----------|
|                     |                 | A <sub>4</sub>  | B <sub>3</sub> | B <sub>4</sub> | H                      | H <sub>3</sub> <sup>2)</sup> | K <sub>2</sub> | K <sub>3</sub> <sup>2)</sup> | S <sub>12</sub> | S <sub>13</sub> |          |
| 25 <sup>1)</sup>    | R1620 211 30    | 57              | 19.0           | 16             | 36<br>40 <sup>3)</sup> | 28.3                         | 8              | 7.0<br>11.0 <sup>3)</sup>    | M6              | G 1/8x8         | 40       |
| 30                  | R1620 711 30    | 59              | 19.0           | 16             | 42<br>45 <sup>3)</sup> | 33.8                         | 8              | 7.0<br>10.0 <sup>3)</sup>    | M6              | G 1/8x8         | 59       |
| 35                  | R1620 311 30    | 69              | 19.0           | 16             | 48<br>55 <sup>3)</sup> | 39.1                         | 8              | 8.0<br>15.0 <sup>3)</sup>    | M6              | G 1/8x8         | 79       |
| 45                  | R1620 411 30    | 85              | 20.0           | 16             | 60<br>70 <sup>3)</sup> | 48.5                         | 8              | 8.0<br>18.0 <sup>3)</sup>    | M6              | G 1/8x8         | 112      |
| 55                  | R1620 511 30    | 98              | 21.0           | 16             | 70<br>80 <sup>3)</sup> | 56.0                         | 8              | 9.0<br>19.0 <sup>3)</sup>    | M6              | G 1/8x8         | 152      |
| 65                  | R1620 611 30    | 124             | 20.0           | 16             | 90                     | 75.7                         | 8              | 18.0                         | M6              | G 1/8x8         | 285      |
| 25/70 <sup>4)</sup> | R1670 211 40    | 99              | 19.0           | 16             | 35                     | 29.6                         | 8              | 8.4                          | M6              | G 1/8x8         | 65       |
| 35/90 <sup>4)</sup> | R1670 311 30    | 129             | 19.0           | 16             | 50                     | 42.0                         | 8              | 9.5                          | M6              | G 1/8x8         | 120      |

1) **Not** for ball runner blocks F.N (flange ... low) and S.N (slimline ... low)

2) Based on the mounting face of the ball runner block

3) For ball runner blocks S.H (slimline ... high)

4) Wide ball rail system

# Transport lock




## Transport lock for ball runner blocks

For transporting and as a mounting device

- Material: Plastic

| Size  | Material numbers | Mass (g) |
|-------|------------------|----------|
| 15    | R1653 101 89     | 2        |
| 20    | R1653 801 89     | 3        |
| 25    | R1653 202 89     | 4        |
| 30    | R1653 702 89     | 10       |
| 35    | R1653 302 89     | 10       |
| 45    | R1653 402 89     | 20       |
| 55    | R1653 502 89     | 31       |
| 65    | R1653 602 89     | 58       |
| 20/40 | R1671 505 89     | 7        |
| 25/70 | R1671 201 89     | 13       |
| 35/90 | R1671 301 89     | 33       |

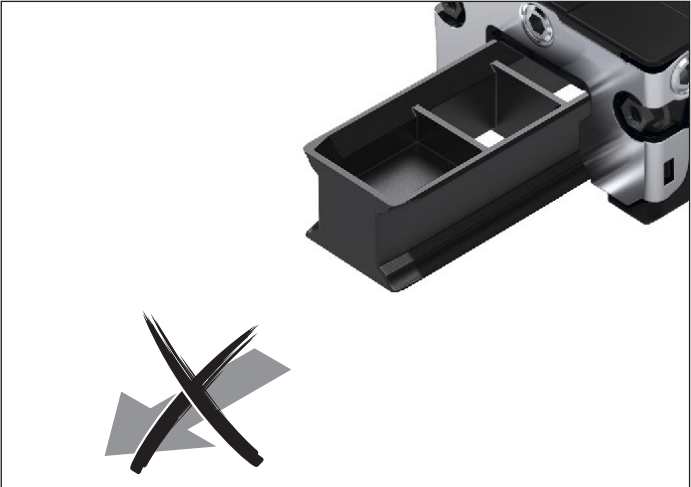

### Notes

The ball runner block is slid from the transport lock onto the rail.

See the chapter "Instructions for mounting".

- ⚠ The transport lock must remain in the ball runner block until it slides onto the ball guide rail! Otherwise it is possible to lose the balls!




## Front lube units

**For travel up to 25 000 km without relubrication**


### Advantages for mounting and operation

- ▶ For a travel distance of up to 25,000 km without re-lubrication
- ▶ Ball runner block only requires initial lubrication with grease
- ▶ Front lube units on both sides of the ball runner block
- ▶ Low lubricant loss
- ▶ Reduced oil consumption
- ▶ No lubrication lines
- ▶ Max. operating temperature 60°C
- ▶ Front lube unit can be refilled using the lube nipple on the end-face or at the side.
- ▶ Lube connection on the end-face of the front lube unit is suitable for lubricating the ball runner block with grease.

**Standard ball runner blocks with two front lube units**

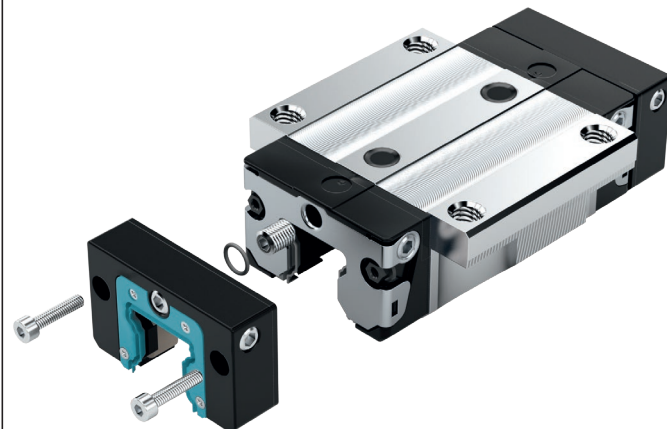

| Size | Possible travel distance s with front lube units (km) |
|------|-------------------------------------------------------|
| 15   | 15 000                                                |
| 20*) | 15 000                                                |
| 25*) | 25 000                                                |
| 30   | 25 000                                                |
| 35   | 25 000                                                |
| 45   | 25 000                                                |
| 55   | 1 500                                                 |
| 65   | 1 000                                                 |

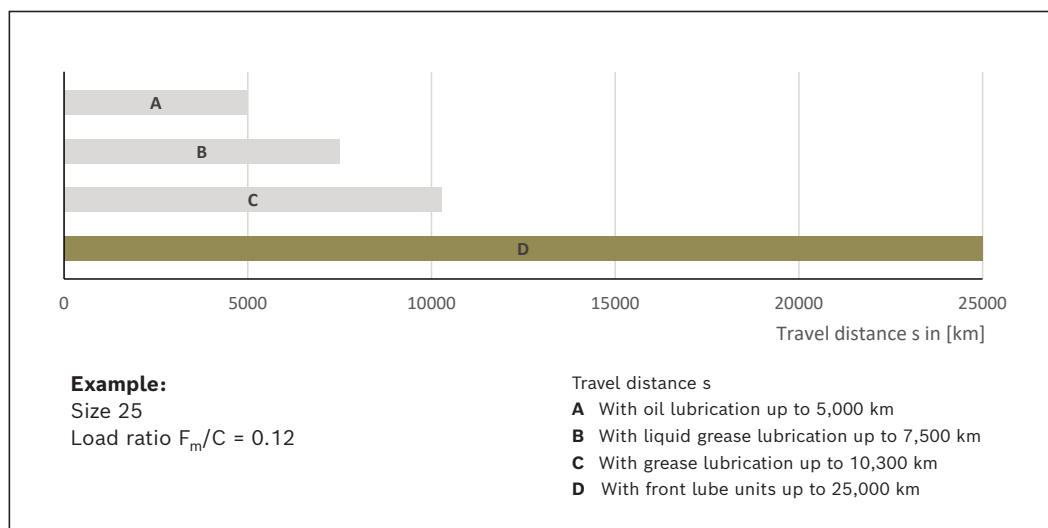


Material numbers, dimension drawing, dimensions and technical data see following page.

\*) Low ball runner blocks of type FNN, SNN, FKN and SKN have shorter travel distances. See diagram 1 "Load-dependent relubrication intervals for ball runner blocks with front lube units".

### Lubricant distribution

Due to the special structural design of the lubricant distribution, lubrication occurs primarily where it is needed: directly on the raceways and the top surfaces of the ball guide rails.

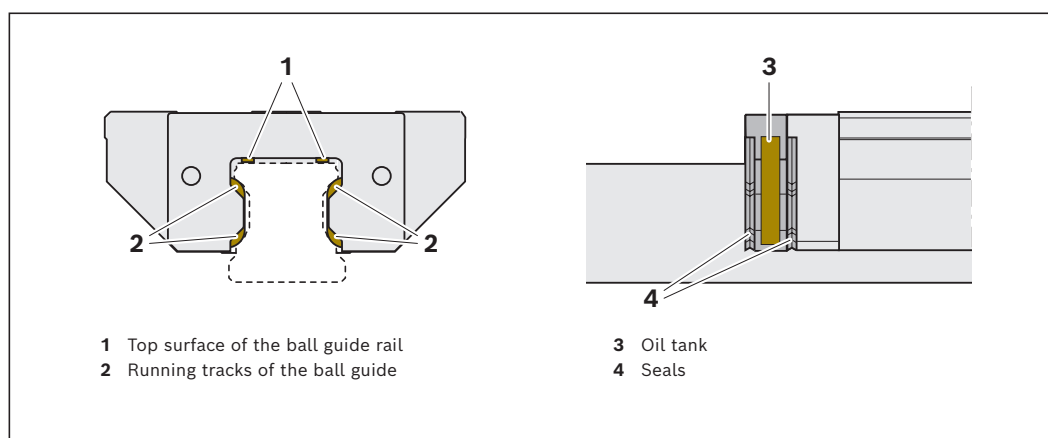

**Front lube unit  
R1619 .2. 00**

Material:  
Special plastic

The front lube units  
R1619 .2. 00 are supplied  
ready-filled with oil  
(Mobil SHC 639) and can  
be mounted after basic  
lubrication of the ball  
runner blocks.

**Front lube unit  
R1619 .2. 10**

Material:  
Special plastic


The front lube units  
R1619 .2. 10 are not filled  
at the factory.

**Recommended lubricant  
oil for initial filling:**

- Mobil SHC 639  
(viscosity 1000 mm<sup>2</sup>/s  
at 40 °C)

An initial lubrication of the ball runner blocks **with grease  
lubricant** is required before mounting the front lube units!  
**See chapter "Lubrication".**

If other types of lubricant oil are used, please consider the  
compatibility of the lubricants and the travel distance!

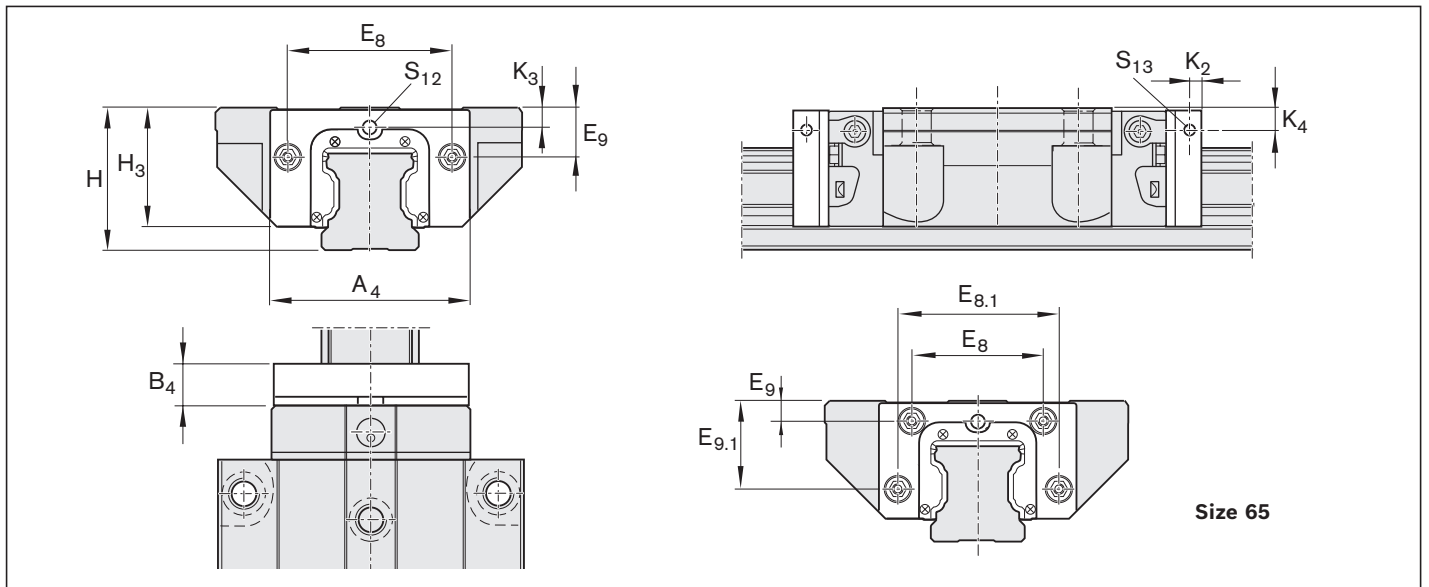

| Size | Material number            | Dimensions (mm) |                |                |                  |                              |                                |                        |                              |                |                                                         |                 |                 | Oil<br>(cm <sup>3</sup> ) | Mass<br>(g) |
|------|----------------------------|-----------------|----------------|----------------|------------------|------------------------------|--------------------------------|------------------------|------------------------------|----------------|---------------------------------------------------------|-----------------|-----------------|---------------------------|-------------|
|      |                            | A <sub>4</sub>  | B <sub>4</sub> | E <sub>8</sub> | E <sub>8.1</sub> | E <sub>9</sub> <sup>2)</sup> | E <sub>9.1</sub> <sup>2)</sup> | H                      | H <sub>3</sub> <sup>2)</sup> | K <sub>2</sub> | K <sub>3</sub> <sup>2)/K<sub>4</sub><sup>2)</sup></sup> | S <sub>12</sub> | S <sub>13</sub> |                           |             |
| 15   | R1619 125 00               | 31.8            | 11.5           | 24.55          | –                | 6.70<br>10.70 <sup>3)</sup>  | –                              | 24<br>28 <sup>3)</sup> | 19.40<br>23.40 <sup>3)</sup> | 5              | 3.35<br>7.35 <sup>3)</sup>                              | M3              | M3              | 1.00                      | 15          |
| 20   | R1619 825 00               | 43.0            | 12.5           | 32.50          | –                | 7.30                         | –                              | 30                     | 24.90                        | 5              | 3.70                                                    | M3              | M3              | 2.20                      | 20          |
|      | R1619 826 00 <sup>1)</sup> | 41.0            | 12.5           | 30.50          | –                | 5.60                         | –                              | 28                     | 22.90                        | –              | 3.10                                                    | –               | M3              | 1.80                      | 20          |
| 25   | R1619 225 00               | 47.0            | 13.0           | 38.30          | –                | 11.50<br>15.50 <sup>3)</sup> | –                              | 36<br>40 <sup>3)</sup> | 29.30<br>33.30 <sup>3)</sup> | 5              | 5.50<br>9.50 <sup>3)</sup>                              | M6              | M6              | 2.60                      | 25          |
|      | R1619 226 00 <sup>1)</sup> | 47.0            | 13.0           | 38.30          | –                | 8.50                         | –                              | 33                     | 26.30                        | 5              | 4.10                                                    | M3              | M3              | 2.50                      | 25          |
| 30   | R1619 725 00               | 58.8            | 14.5           | 48.40          | –                | 14.60<br>17.60 <sup>3)</sup> | –                              | 42<br>45 <sup>3)</sup> | 35.05<br>38.05 <sup>3)</sup> | 6              | 6.05<br>9.05 <sup>3)</sup>                              | M6              | M6              | 3.85                      | 35          |
| 35   | R1619 325 00               | 69.0            | 16.0           | 58.00          | –                | 17.35<br>24.35 <sup>3)</sup> | –                              | 48<br>55 <sup>3)</sup> | 39.85<br>46.85 <sup>3)</sup> | 6              | 6.90<br>13.90 <sup>3)</sup>                             | M6              | M6              | 5.70                      | 50          |
| 45   | R1619 425 00               | 84.0            | 17.0           | 69.80          | –                | 20.90<br>30.90 <sup>3)</sup> | –                              | 60<br>70 <sup>3)</sup> | 49.80<br>59.80 <sup>3)</sup> | 7              | 8.20<br>18.20 <sup>3)</sup>                             | M6              | M6              | 9.60                      | 70          |
| 55   | R1619 525 00               | 99.0            | 18.0           | 80.00          | –                | 22.30<br>32.30 <sup>3)</sup> | –                              | 70<br>80 <sup>3)</sup> | 57.05<br>67.05 <sup>3)</sup> | 8              | 8.90<br>18.90 <sup>3)</sup>                             | M6              | M6              | 14.50                     | 90          |
| 65   | R1619 625 00               | 124.2           | 19.0           | 76.00          | 100              | 11.00                        | 53.5                           | 90                     | 75.70                        | 8              | 16.00                                                   | M8              | M8              | 30.00                     | 130         |

1) For ball runner blocks F.N (flange ... low) and S.N. (slimline ... low)

2) Based on the mounting face of the ball runner block

3) For ball runner blocks S.H (slimline ... high)

Front lube units

Initial filling of a front lube unit without oil

- ▶ Remove the set screw from the lube port (fig. 1, item 1) and keep for later use.
- ▶ Screw in lube nipple (2).
- ▶ Lie the front lube unit (3) down flat, fill with quantity of oil as per table 1, and leave it to lie for around 36 hours.
- ▶ Check whether the lube insert is completely soaked with oil. If necessary, add oil.
- ▶ Remove lube nipple.
- ▶ Screw in the set screw
- ▶ For size 20 low profile: Put the front lube units in 10 mm of oil for approx. 36 hours (see fig. 2).

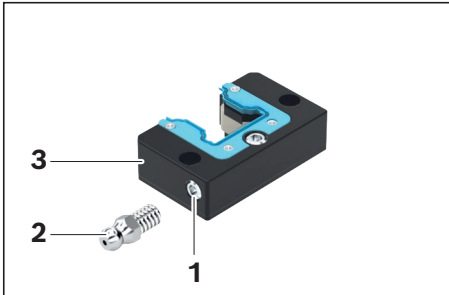


Figure 1

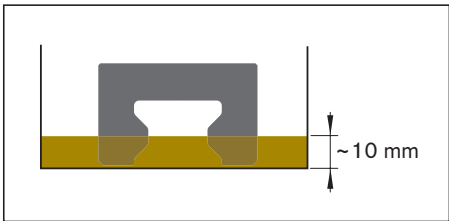


Figure 2

| Size | Oil quantity for initial filling of a front lube unit without oil (cm³) |
|------|-------------------------------------------------------------------------|
| 15   | 0.90                                                                    |
| 20   | 2.00                                                                    |
| 25   | 2.40                                                                    |
| 30   | 3.85                                                                    |
| 35   | 5.70                                                                    |
| 45   | 9.60                                                                    |
| 55   | 14.50                                                                   |
| 65   | 30.00                                                                   |

Table 1

Relubrication of front lube units

If the relubrication interval according to diagram 1 has been reached, relubricate the amount stated in table 1.

- ▶ The units can be relubricated through the lube connection at the side.
- ▶ The front lube unit size 20 low is not refillable via the lube connection (see figure 2).

Note

Rexroth recommends replacing the front lube units every 3 years at the latest and re-lubricating the ball runner block before mounting the new front lube unit.

Relubrication of the ball runner blocks

In clean operating environments, the ball runner blocks can be relubricated with grease (Dynalub 510) at the end face. Relubrication of the ball runner blocks **with grease lubricant** see the "Lubrication" chapter

- ⚠ If other lubricants are used, this may lead to a reduction in the lubrication intervals, performance losses in short stroke applications and the load capacities. Possible chemical interactions between the plastic materials, lubricants and preservative agents must also be taken into account.
- The recommended lubrication intervals depend on environmental factors, load and load type. Examples of environmental factors include swarf, mineral abrasion (or similar), solvent and temperature. Examples of loads and stress types are oscillations, shocks and tilting.
- ⚠ The conditions of use are unknown to the manufacturer. Only the user's own trials or accurate monitoring can yield safety across lubrication intervals.
  - ⚠ Do not use water-based coolant/lubricant on the ball guide rails and ball runner block!

### Load-dependent relubrication intervals for ball runner blocks with front lube units

#### This applies to the following conditions:

- ▶ Ball runner block lubricants:  
Dynalub 510 (grease NLGI 2),  
alternatively Castrol Tribol GR 100-2 PD  
or Elkalube GLS 135/N2
- ▶ Front lube units lubricant: Mobil  
SHC 639 (synthetic oil)
- ▶ Maximum speed:  $v_{\max} = 2 \text{ m/s}$
- ▶ No media pressurization
- ▶ Standard seals (SS)
- ▶ Ambient temperature:  $T = 10 - 40 \text{ }^{\circ}\text{C}$

#### Key

|         |                                             |      |
|---------|---------------------------------------------|------|
| C       | = Dynamic load capacity                     | (N)  |
| $F_m$   | = Dynamically equivalent load on bearing    | (N)  |
| $F_m/C$ | = Load ratio                                | (-)  |
| s       | = Relubrication interval as travel distance | (km) |

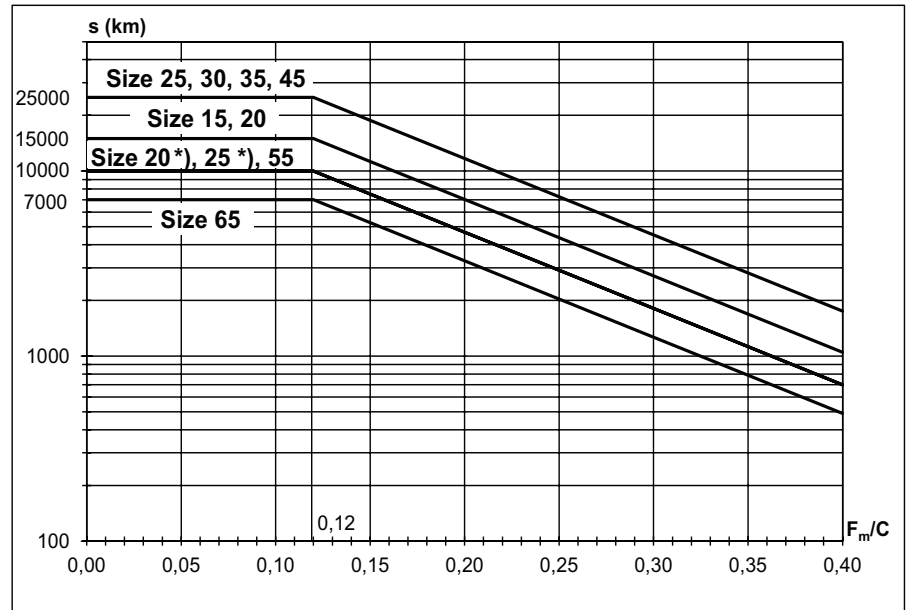


Diagram 1

\*) ball runner blocks F.N (flange ... low) and S.N. (slimline ... low)

### Mounting of front lube units

#### Instruction for mounting

The required mounting accessories (coated screws, seals and lube nipples) are supplied along with the units. Mount a front lube unit on both sides of the ball runner block (fig. 3, pos. 3)!

Do not remove the ball runner block from the ball guide rail!

#### Ball runner blocks up to size 45 (fig. 3a):

The enclosed lube pin (2) must be mounted between the lubrication plate and the ball runner block! (It contains a lube port.)

- ▶ Remove the set screws (1).
- ▶ Screw in the lube pin (2).
- ▶ Slide on the front lube units (3).
- ▶ Insert o-rings (5) between the ball runner block and front lube units.
- ▶ Tighten screws (4) to tightening torque  $M_A$  (see table 2).

#### Ball runner blocks from size 55 (fig. 3b):

- ▶ Slide on the front lube units (3).
- ▶ Remove the set screws (1) and insert the o-rings (5) between the ball runner block and front lube units.
- ▶ Tighten screws (4) to tightening torque  $M_A$  (see table 2).

| Size |  Pos. 4 | Tightening torque $M_A$<br>(Nm) |
|------|---------------------------------------------------------------------------------------------|---------------------------------|
| 15   | M2.5 x 12                                                                                   | 0.3                             |
| 20   | M3 x 14                                                                                     | 0.6                             |
| 25   | M3 x 14                                                                                     | 0.6                             |
| 30   | M3 x 14                                                                                     | 1.2                             |
| 35   | M3 x 16                                                                                     | 1.2                             |
| 45   | M4 x 18                                                                                     | 1.6                             |
| 55   | M5 x 18                                                                                     | 2.0                             |
| 65   | M4 x 20                                                                                     | 1.6                             |

Table 2

Figure 3a (up to size 45)



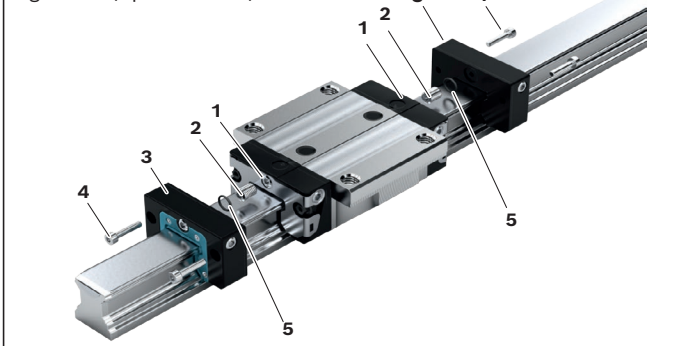


Figure 3b (from size 55)

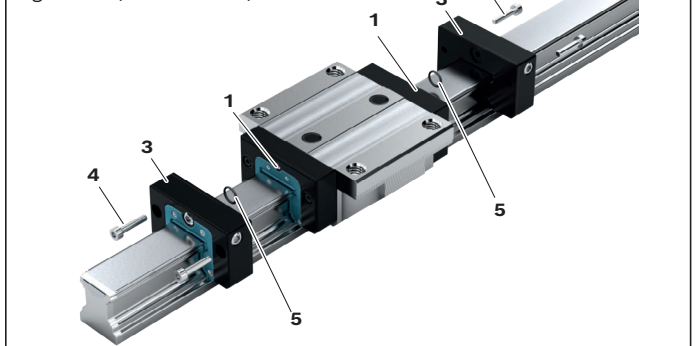

# Bellows

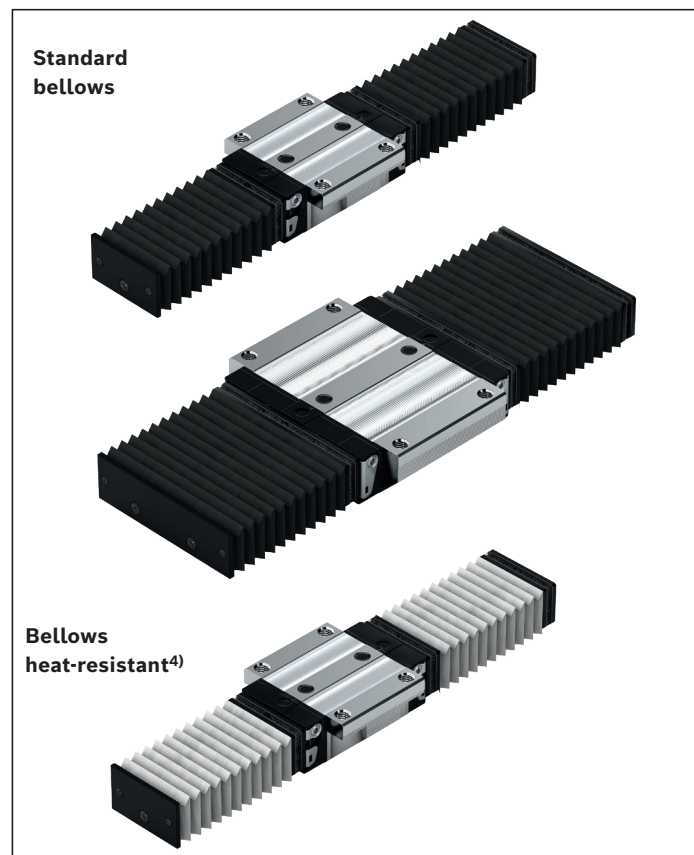

## Standard bellows

### R1620 .0. 00

- ▶ Material: Polyurethane-coated polyester fabric
- ▶ Aluminum lubrication plate




## Heat-resistant bellows<sup>4)</sup>

### R1620 .5. 00




- ▶ Material: Nomex fabric, metalized

## Temperature stability

- ▶ Non combustible, non flammable
- ▶ Resistant to sparks, welding spatter and hot chips
- ▶ The protective metal coating can withstand peak temperatures of up to 200 °C
- ▶ Operating temperature for the total bellows max. 80 °C

| Size                      | <div>    </div> |                                                   |                                                                                                 |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|-------------------------------------------------------------------------------------------------|
|                           | <b>Type 1: With lubrication plate<sup>1)</sup> and end plate</b><br><b>Type 6: With VSE<sup>2)</sup> and end plate</b>                                                                                                                                                     | <b>Type 2: With fastening frame and end plate</b> | <b>Type 3: With 2 lubrication plates<sup>1)</sup></b><br><b>Type 7: With 2 VSE<sup>2)</sup></b> |
|                           | <b>Material number, fold count</b>                                                                                                                                                                                                                                         |                                                   |                                                                                                 |
|                           | <b>Standard bellows</b>                                                                                                                                                                                                                                                    |                                                   |                                                                                                 |
| <b>15</b>                 | R1620 10. 00, ...                                                                                                                                                                                                                                                          | R1620 102 00, ...                                 | R1620 10. 00, ...                                                                               |
| <b>20</b>                 | R1620 80. 00, ...                                                                                                                                                                                                                                                          | R1620 802 00, ...                                 | R1620 80. 00, ...                                                                               |
| <b>25</b>                 | R1620 20. 00, ...                                                                                                                                                                                                                                                          | R1620 202 00, ...                                 | R1620 20. 00, ...                                                                               |
| <b>30</b>                 | R1620 70. 00, ...                                                                                                                                                                                                                                                          | R1620 702 00, ...                                 | R1620 70. 00, ...                                                                               |
| <b>35</b>                 | R1620 30. 00, ...                                                                                                                                                                                                                                                          | R1620 302 00, ...                                 | R1620 30. 00, ...                                                                               |
| <b>45</b>                 | R1620 40. 00, ...                                                                                                                                                                                                                                                          | R1620 402 00, ...                                 | R1620 40. 00, ...                                                                               |
| <b>55</b>                 | R1620 50. 00, ...                                                                                                                                                                                                                                                          | R1620 502 00, ...                                 | R1620 50. 00, ...                                                                               |
| <b>65</b>                 | R1620 60. 00, ...                                                                                                                                                                                                                                                          | R1620 602 00, ...                                 | R1620 60. 00, ...                                                                               |
| <b>20/40<sup>3)</sup></b> | –                                                                                                                                                                                                                                                                          | R1670 502 00, ...                                 | –                                                                                               |
| <b>25/70<sup>3)</sup></b> | –                                                                                                                                                                                                                                                                          | R1670 202 00, ...                                 | –                                                                                               |
| <b>35/90<sup>3)</sup></b> | –                                                                                                                                                                                                                                                                          | R1670 302 00, ...                                 | –                                                                                               |
|                           | <b>Heat-resistant bellows<sup>4)</sup></b>                                                                                                                                                                                                                                 |                                                   |                                                                                                 |
| <b>25</b>                 | R1620 25. 00, ...                                                                                                                                                                                                                                                          | R1620 252 00, ...                                 | R1620 25. 00, ...                                                                               |
| <b>30</b>                 | R1620 75. 00, ...                                                                                                                                                                                                                                                          | R1620 752 00, ...                                 | R1620 75. 00, ...                                                                               |
| <b>35</b>                 | R1620 35. 00, ...                                                                                                                                                                                                                                                          | R1620 352 00, ...                                 | R1620 35. 00, ...                                                                               |
| <b>45</b>                 | R1620 45. 00, ...                                                                                                                                                                                                                                                          | R1620 452 00, ...                                 | R1620 45. 00, ...                                                                               |
| <b>55</b>                 | R1620 55. 00, ...                                                                                                                                                                                                                                                          | R1620 552 00, ...                                 | R1620 55. 00, ...                                                                               |
| <b>65</b>                 | R1620 65. 00, ...                                                                                                                                                                                                                                                          | R1620 652 00, ...                                 | R1620 65. 00, ...                                                                               |



| Size                |    |                                                                                                                        |                                    |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|------------------------------------|
|                     | Type 4: With 2 fastening frames                                                                                                                                                                                                                          | Type 5: With lubrication plate <sup>1)</sup> and fastening frame<br>Type 8: With VSE <sup>2)</sup> and fastening frame | Type 9: Loose bellows (spare part) |
|                     | Material number, fold count                                                                                                                                                                                                                              |                                                                                                                        |                                    |
|                     | Standard bellows                                                                                                                                                                                                                                         |                                                                                                                        |                                    |
| 15                  | R1620 104 00, ...                                                                                                                                                                                                                                        | R1620 10. 00, ...                                                                                                      | R1600 109 00, ...                  |
| 20                  | R1620 804 00, ...                                                                                                                                                                                                                                        | R1620 80. 00, ...                                                                                                      | R1600 809 00, ...                  |
| 25                  | R1620 204 00, ...                                                                                                                                                                                                                                        | R1620 20. 00, ...                                                                                                      | R1600 209 00, ...                  |
| 30                  | R1620 704 00, ...                                                                                                                                                                                                                                        | R1620 70. 00, ...                                                                                                      | R1600 709 00, ...                  |
| 35                  | R1620 304 00, ...                                                                                                                                                                                                                                        | R1620 30. 00, ...                                                                                                      | R1600 309 00, ...                  |
| 45                  | R1620 404 00, ...                                                                                                                                                                                                                                        | R1620 40. 00, ...                                                                                                      | R1600 409 00, ...                  |
| 55                  | R1620 504 00, ...                                                                                                                                                                                                                                        | R1620 50. 00, ...                                                                                                      | R1600 509 00, ...                  |
| 65                  | R1620 604 00, ...                                                                                                                                                                                                                                        | R1620 60. 00, ...                                                                                                      | R1600 609 00, ...                  |
| 20/40 <sup>3)</sup> | R1670 504 00, ...                                                                                                                                                                                                                                        | –                                                                                                                      | R1670 509 00, ...                  |
| 25/70 <sup>3)</sup> | R1670 204 00, ...                                                                                                                                                                                                                                        | –                                                                                                                      | R1670 209 00, ...                  |
| 35/90 <sup>3)</sup> | R1670 304 00, ...                                                                                                                                                                                                                                        | –                                                                                                                      | R1670 309 00, ...                  |
|                     | Heat-resistant bellows <sup>4)</sup>                                                                                                                                                                                                                     |                                                                                                                        |                                    |
| 25                  | R1620 254 00, ...                                                                                                                                                                                                                                        | R1620 25. 00, ...                                                                                                      | R1600 259 00, ...                  |
| 30                  | R1620 754 00, ...                                                                                                                                                                                                                                        | R1620 75. 00, ...                                                                                                      | R1600 759 00, ...                  |
| 35                  | R1620 354 00, ...                                                                                                                                                                                                                                        | R1620 35. 00, ...                                                                                                      | R1600 359 00, ...                  |
| 45                  | R1620 454 00, ...                                                                                                                                                                                                                                        | R1620 45. 00, ...                                                                                                      | R1600 459 00, ...                  |
| 55                  | R1620 554 00, ...                                                                                                                                                                                                                                        | R1620 55. 00, ...                                                                                                      | R1600 559 00, ...                  |
| 65                  | R1620 654 00, ...                                                                                                                                                                                                                                        | R1620 65. 00, ...                                                                                                      | R1600 659 00, ...                  |

Weights on request

1) No lubrication plate necessary for ball runner blocks with side lube ports

2) VSE = Front lube unit

3) Wide ball rail system

4) Note overall height (see dimension drawing/dimensions of heat-resistant bellows)

**Ordering example:**


- Bellows
- Size 35
- Standard
- Type 6 with VSE and end plate
- Number of folds: 36

**Example: R1620 3 0 6 00, 36 Folding****Standard** = 0**Heat-resistant** = 5**Type 1 - 9**


# Bellows

## Instruction for mounting


- The bellows are pre-mounted.
- The fastening screws are included.
- Bellows with lubrication plate (type 1, 3 - 5)  
Size 15 - 20:  
A funnel-type lube nipple with a knock-in spigot is included.  
Sizes 25 - 65 and wide:  
The lube nipple of the ball runner block can be used.
- For type 1 and type 2, an M4x10 thread with 2 x 45° countersink must be placed in the end face of the ball guide rail SNS in each case.  
For ball guide rail BNS:  
Tap two threads at each end face.
- Observe the mounting instructions

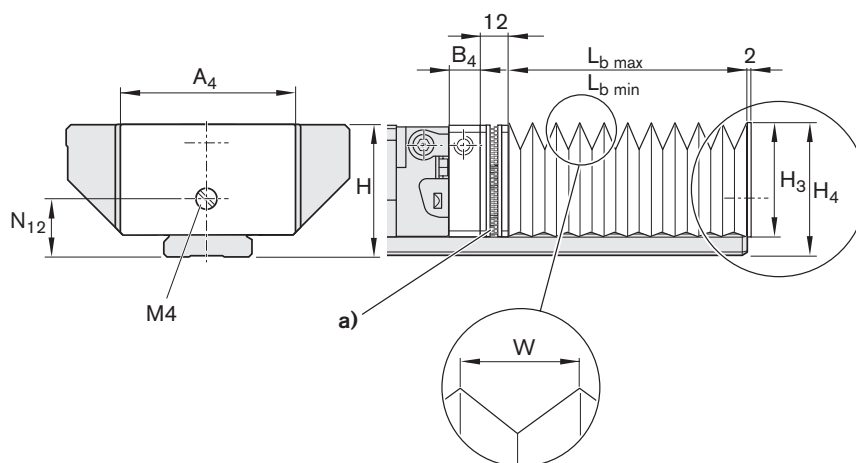

## Heat-resistant bellows<sup>2)</sup> (observe overall height)



## Bellows, wide

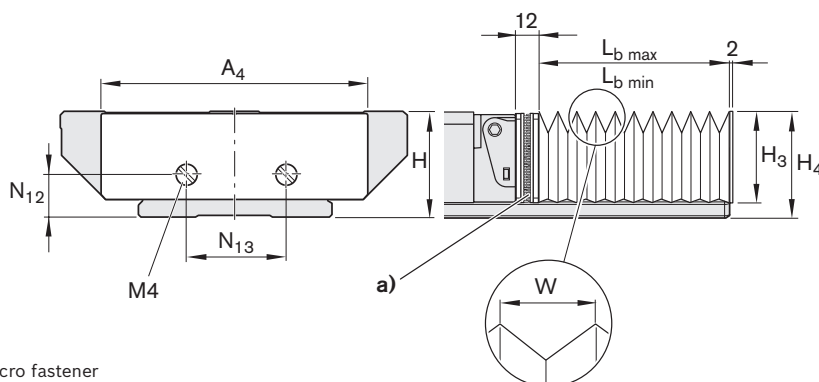

a) Velcro fastener

Illustrations not to scale


**Standard bellows**

| Size                | Dimensions (mm) |                |    |                |                |                 |                 |       | Factor U |
|---------------------|-----------------|----------------|----|----------------|----------------|-----------------|-----------------|-------|----------|
|                     | A <sub>4</sub>  | B <sub>4</sub> | H  | H <sub>3</sub> | H <sub>4</sub> | N <sub>12</sub> | N <sub>13</sub> | W     |          |
| 15 <sup>2)</sup>    | 45              | 11             | 24 | 26.5           | 31.5           | 11.0            | –               | 21.0  | 1.25     |
| 20                  | 42              | 12             | 30 | 24.0           | 29.2           | 13.0            | –               | 10.5  | 1.56     |
| 25                  | 45              | 12             | 36 | 28.5           | 35.0           | 15.0            | –               | 14.0  | 1.39     |
| 30                  | 55              | 12             | 42 | 34.0           | 41.0           | 18.0            | –               | 17.5  | 1.30     |
| 35                  | 64              | 12             | 48 | 39.0           | 47.0           | 22.0            | –               | 21.0  | 1.32     |
| 45                  | 83              | 12             | 60 | 49.0           | 59.0           | 30.0            | –               | 28.0  | 1.23     |
| 55                  | 96              | 12             | 70 | 56.0           | 69.0           | 30.0            | –               | 31.5  | 1.20     |
| 65                  | 120             | 14             | 90 | 75.0           | 89.0           | 40.0            | –               | 43.75 | 1.14     |
| 20/40 <sup>1)</sup> | 73              | –              | 27 | 31.0           | 35.0           | 11.5            | –               | 21.0  | 1.25     |
| 25/70 <sup>1)</sup> | 101             | –              | 35 | 29.0           | 35.0           | 14.0            | 26              | 14.0  | 1.39     |
| 35/90 <sup>1)</sup> | 128             | –              | 50 | 42.0           | 49.0           | 21.5            | 40              | 21.0  | 1.32     |

**Heat-resistant bellows<sup>2)</sup>**

| Size | Dimensions (mm) |                |    |                |                |                 |                 |       | Factor U |
|------|-----------------|----------------|----|----------------|----------------|-----------------|-----------------|-------|----------|
|      | A <sub>4</sub>  | B <sub>4</sub> | H  | H <sub>3</sub> | H <sub>4</sub> | N <sub>12</sub> | N <sub>13</sub> | W     |          |
| 25   | 62              | 12             | 36 | 39.0           | 44.5           | 15              | –               | 28.0  | 1.43     |
| 30   | 67              | 12             | 42 | 42.0           | 47.5           | 18              | –               | 28.0  | 1.43     |
| 35   | 74              | 12             | 48 | 47.0           | 54.0           | 22              | –               | 31.5  | 1.38     |
| 45   | 88              | 12             | 60 | 55.0           | 64.0           | 30              | –               | 35.0  | 1.33     |
| 55   | 102             | 12             | 70 | 63.0           | 75.0           | 30              | –               | 40.25 | 1.28     |
| 65   | 134             | 14             | 90 | 86.0           | 99.0           | 40              | –               | 57.75 | 1.19     |

1) Wide ball rail system

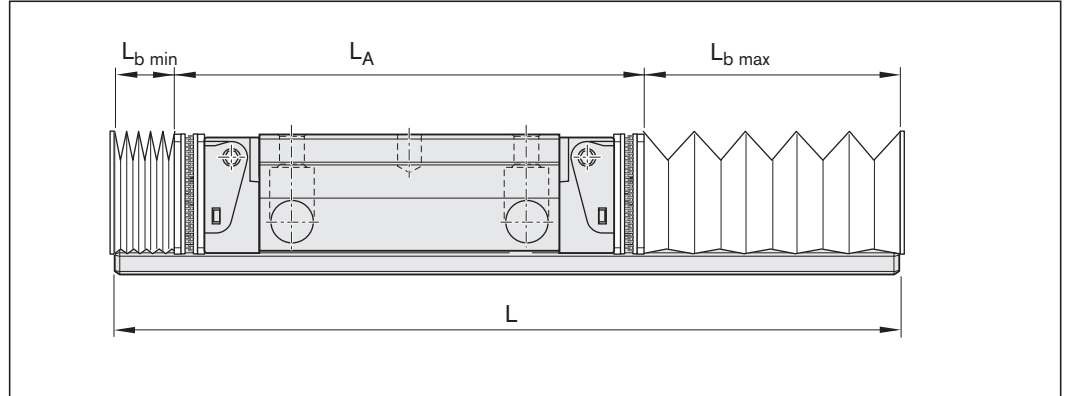2) Observe the overall height (dimension H<sub>4</sub> compared with dimension H)**Calculation****Ball guide rail length**

$$1) \quad L = s_{\max} \cdot U + L_A + 30$$

$$L_A = B + 2 \cdot 12 + B_4$$

$$2) \quad s_{\max} = \frac{L - L_A - 30}{U}$$

L = Ball guide rail length (mm)

s<sub>max</sub> = Maximum travel range (mm)

U = Calculation factor (–)

L<sub>A</sub> = Length of ball runner block with attachments (mm)

B = Ball runner block length (mm)

(see chapter "Ball runner blocks")

B<sub>4</sub> = Front unit width (mm)

(see chapter "Accessories for ball runner blocks")

**Bellows**

$$L_{bmin} = 1/2 (L - s_{\max} - L_A)$$

$$L_{bmax} = L_{bmin} + s_{\max}$$

$$n = \frac{L_{bmax}}{W} + 2$$

L<sub>bmin</sub> = Bellows, contracted (mm)L<sub>bmax</sub> = Bellows, maximum elongated (mm)

n = Number of folds (–)

W = Maximum bellows extension (mm)


1) At predetermined travel

2) With limited installation space

# Lube nipple, lube fittings, extensions

## Funnel-type lube nipple according to DIN 3405


Form A



| Material number            | Dimensions (mm) |                | Mass (g) |
|----------------------------|-----------------|----------------|----------|
|                            | G               | L <sub>1</sub> |          |
| R3417 029 09               | M3              | 5              | 0.3      |
| R3417 032 09 <sup>1)</sup> |                 |                |          |


- 1) Lube nipple Resist NR II  
made of corrosion resistant steel as per DIN EN 10088

Form B



| Material number | Dimensions (mm) |                | Mass (g) |
|-----------------|-----------------|----------------|----------|
|                 | G               | L <sub>1</sub> |          |
| R3417 004 09    | M3              | 5              | 1.5      |

## Ball-type lube nipple




| Material number            | Dimensions (mm) |                | Mass (g) |
|----------------------------|-----------------|----------------|----------|
|                            | G               | L <sub>1</sub> |          |
| R3417 005 01 <sup>1)</sup> | M3              | 5              | 0.5      |

- 1) Material: Brass

## Hydraulic-type lube nipple according to DIN 71412

Form A




| Material number            | Dimensions (mm) |                | Mass (g) |
|----------------------------|-----------------|----------------|----------|
|                            | G               | L <sub>1</sub> |          |
| R3417 008 02               | M6              | 8              | 2.6      |
| R3417 016 02 <sup>1)</sup> |                 |                |          |

- 1) Lube nipple Resist NR II  
made of corrosion resistant steel as per DIN EN 10088


## Hydraulic-type lube nipple according to DIN 71412

30°



| Material number | Dimensions (mm) |                | Mass (g) |
|-----------------|-----------------|----------------|----------|
|                 | G               | L <sub>1</sub> |          |
| R3417 023 02    | M6              | 8              | 7.4      |


Form B



| Material number | Dimensions (mm) |                | Mass (g) |
|-----------------|-----------------|----------------|----------|
|                 | G               | L <sub>1</sub> |          |
| R3417 007 02    | M6              | 8              | 7.4      |
| R3417 006 02    | M8x1            | 8              | 8.0      |

**Lube fittings****Plastic tube for lube connection****Plastic tube Ø 3 mm**

| Material number | Dimensions      |                 |            | Mass (kg) |
|-----------------|-----------------|-----------------|------------|-----------|
|                 | External Ø (mm) | Internal Ø (mm) | Length (m) |           |
| R3499 287 00    | 3               | 1.7             | 50         | 0.4       |

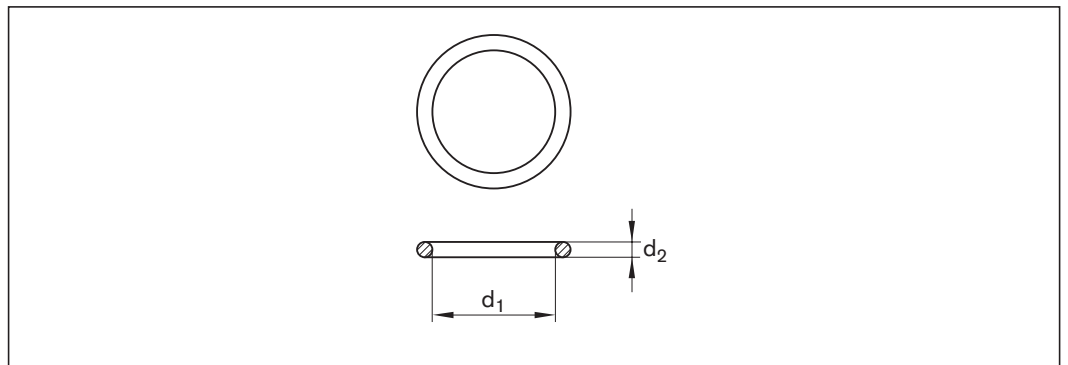**O-rings**


| Material number | d <sub>1</sub> x d <sub>2</sub> (mm) | Mass |
|-----------------|--------------------------------------|------|
| R3411 130 01    | 4 x 1.0                              |      |
| R3411 131 01    | 5 x 1.0                              |      |
| R3411 003 01    | 6 x 1.5                              | 0.03 |

**Nozzle pipe****for manual grease guns.**

For the lubrication of funnel-type and ball-type lube nipples for ball runner blocks BSHP.

Scope of delivery:

- 1 x nozzle pipe
- 1 x interchangeable insert A for funnel-type lube nipple
- 1 x interchangeable insert B for ball-type lube nipple

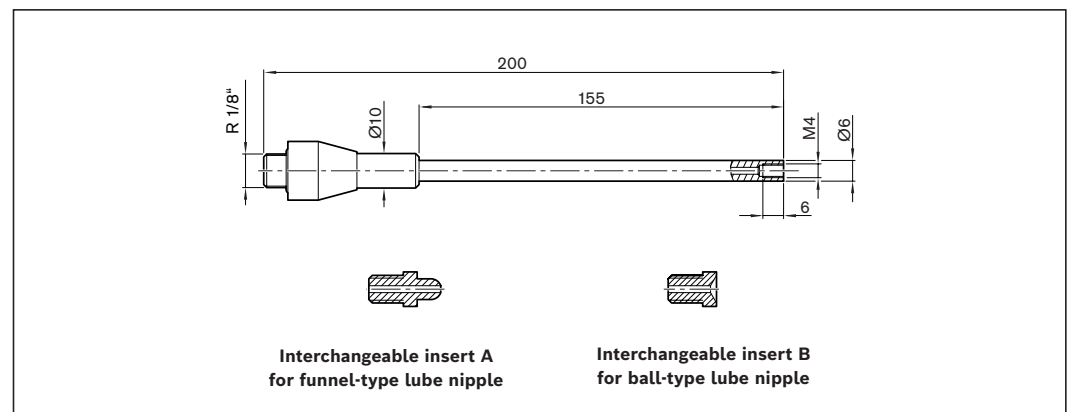


| Material number | Dimensions (mm) | Mass (g) |
|-----------------|-----------------|----------|
| R3455 031 06    | L 200           | 158      |


# Lube nipple, lube fittings, extensions

## Lube fittings

### Reducers

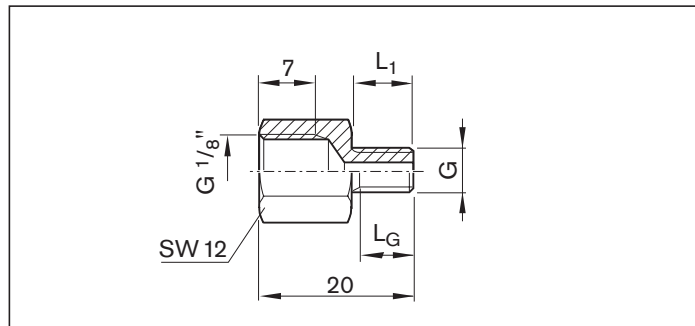


| Material number | Dimensions (mm) |                |                | Mass (g) |
|-----------------|-----------------|----------------|----------------|----------|
|                 | G               | L <sub>1</sub> | L <sub>G</sub> |          |
| R3455 030 34    | M6              | 8              | 6.5            | 7.5      |

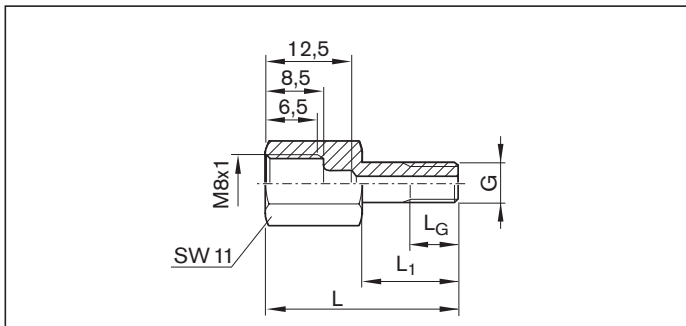


| Material number | Dimensions (mm) |      |                | Mass (g) |
|-----------------|-----------------|------|----------------|----------|
|                 | G               | L    | L <sub>1</sub> |          |
| R3455 030 53    | M8x1            | 28.5 | 14.5           | 10       |

### Extensions

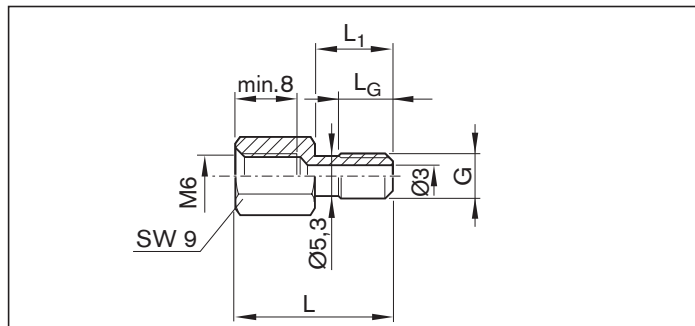


| Material number | Dimensions (mm) |      |                | Mass (g) |
|-----------------|-----------------|------|----------------|----------|
|                 | G               | L    | L <sub>1</sub> |          |
| R3455 030 69    | M6              | 21.0 | 10.5           | 5.0      |
| R3455 030 87    | M6              | 25.0 | 14.5           | 5.5      |
| R3455 030 85    | M6              | 26.5 | 16.0           | 5.0      |

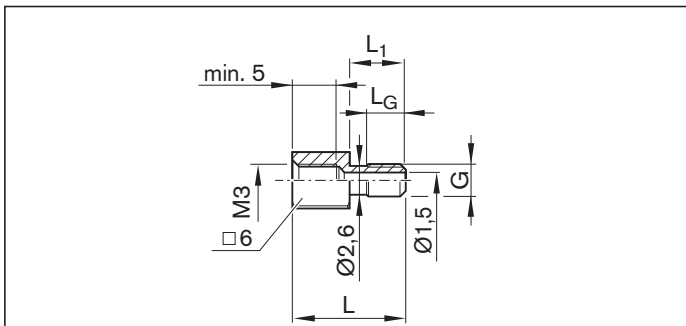


| Material number | Dimensions (mm) |      |                | Mass (g) |
|-----------------|-----------------|------|----------------|----------|
|                 | G               | L    | L <sub>1</sub> |          |
| R3455 030 78    | M3              | 16.5 | 8.5            | 2.5      |
| R3455 030 78    | M3              | 16.5 | 8.5            | 2.3      |
| R3455 031 09    | M3              | 18.0 | 10.0           | 2.3      |

### Connectors

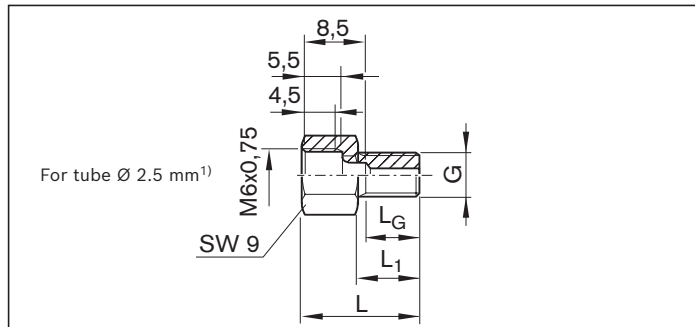


| Material number | Dimensions (mm) |      |                | Mass (g) |
|-----------------|-----------------|------|----------------|----------|
|                 | G               | L    | L <sub>1</sub> |          |
| R3455 030 38    | M6              | 15.5 | 8              | 4.1      |

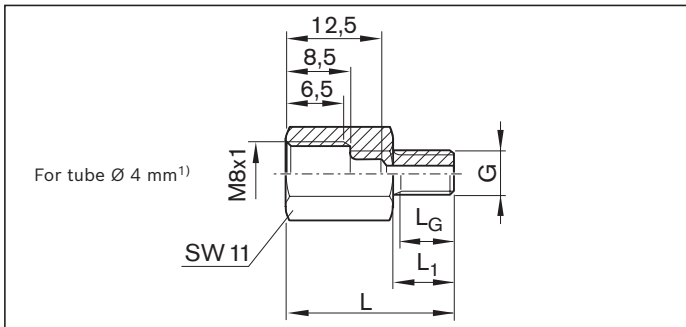

| Material number | Dimensions (mm) |    |                | Mass (g) |
|-----------------|-----------------|----|----------------|----------|
|                 | G               | L  | L <sub>1</sub> |          |
| R3455 030 37    | M6              | 22 | 8              | 8.8      |

1) For connections according to DIN 2353 (solderless tube fittings)

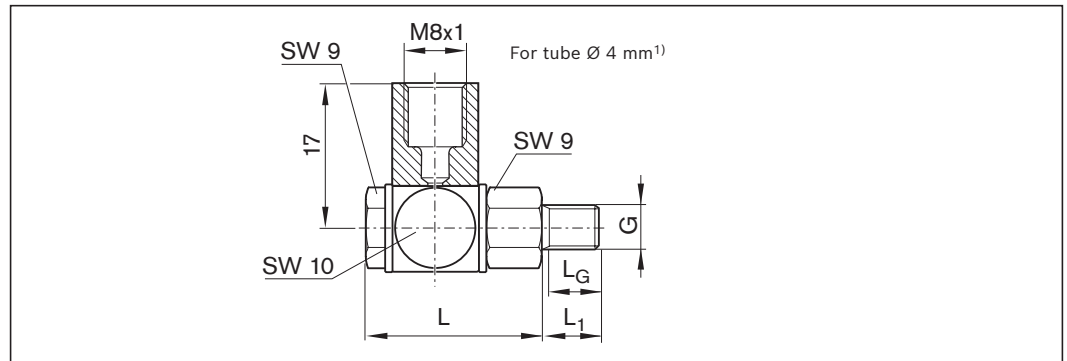
**Swivel fittings**

| Material number | Dimensions (mm) |      |                |                | Mass (g) |
|-----------------|-----------------|------|----------------|----------------|----------|
|                 | G               | L    | L <sub>1</sub> | L <sub>G</sub> |          |
| R3417 018 09    | M6              | 21.5 | 8              | 6.5            | 18.6     |

1) For connections according to DIN 2353 (solderless tube fittings)


**Straight connectors****Push-in fittings for plastic tubes and metal pipes**

⚠ Not permitted for ball runner blocks with accessories on the end face

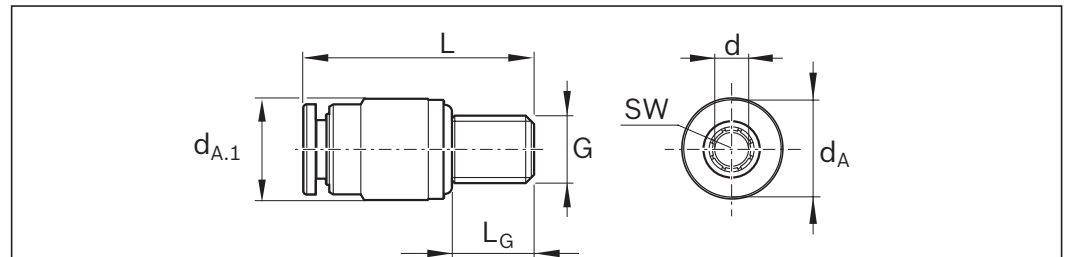

| Material number | Dimensions (mm) |                  |                   |    |      |                |                   | Mass (g) |
|-----------------|-----------------|------------------|-------------------|----|------|----------------|-------------------|----------|
|                 | d <sub>A</sub>  | d <sub>A.1</sub> | d <sub>±0.1</sub> | G  | L    | L <sub>G</sub> | SW                |          |
| R3417 073 09    | 6.5             | 6.5              | 3                 | M3 | 16   | 5              | 1.5 <sup>1)</sup> | 1.6      |
| R3417 074 09    | 6.5             | 8                | 3                 | M5 | 16   | 5              | 2                 | 2.5      |
| R3417 075 09    | 9               | 9                | 4                 | M6 | 24.5 | 8              | 2.5               | 4.9      |
| R3417 076 09    | 11              | 11               | 6                 | M6 | 26   | 8              | 2.5               | 6.2      |

1) Max. tightening torque M<sub>A</sub> = 0.5 Nm

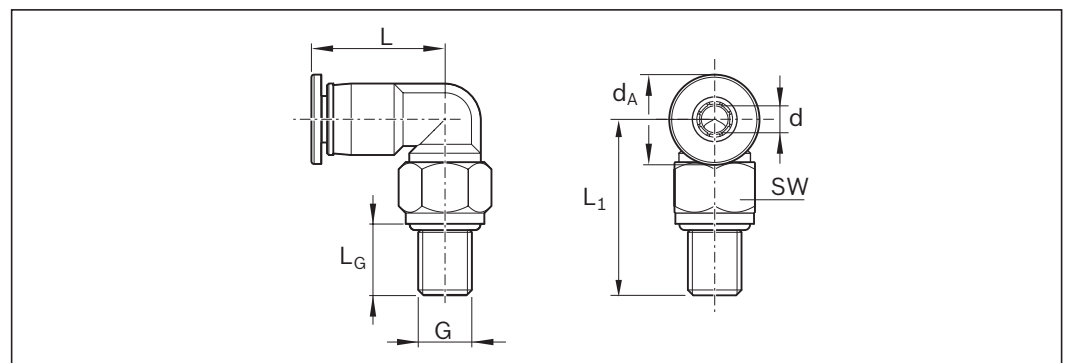**Elbow plug-in connections rotatable<sup>1)</sup>**

| Material number | Dimensions (mm) |                   |    |      |                |                |                 | Mass (g) |
|-----------------|-----------------|-------------------|----|------|----------------|----------------|-----------------|----------|
|                 | d <sub>A</sub>  | d <sub>±0.1</sub> | G  | L    | L <sub>1</sub> | L <sub>G</sub> | SW              |          |
| R3417 077 09    | 6.5             | 3                 | M3 | 11.2 | 14.7           | 5              | 6 <sup>2)</sup> | 3.8      |
| R3417 078 09    | 9               | 4                 | M6 | 18.1 | 18.1           | 8              | 9               | 10.8     |
| R3417 079 09    | 11              | 6                 | M6 | 20.8 | 18.1           | 8              | 9               | 12.9     |

1) Max. lubrication pressure: 30 bar (exerting slow pressure with manual grease gun)

2) Max. tightening torque M<sub>A</sub> = 0.5 Nm


## Product description

Rexroth offers limitless interchangeability as all ball guide rail versions can be combined at will with all accessories within each size.

The entire range is ideally geared to enable a top performance and meet all special requirements.

### Overview of accessories for ball guide rails


**Loose cover strip**

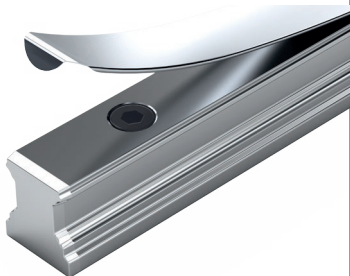


**Expanding tool**



**Installation set for cover strip with arbor and lifting plate**

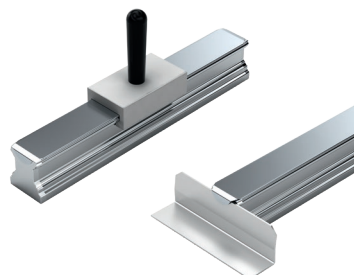


**Aluminum strip clamp**




**Plastic protective cap**




**Plastic mounting hole plug**



**Steel cap**



**Two-piece mounting device for steel caps**

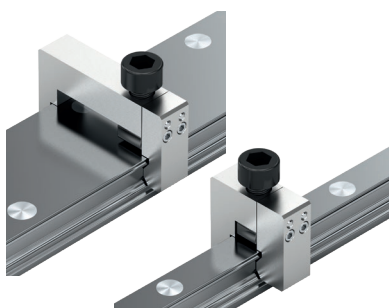

**Mounting runner block**



**V-guide (except BNS)**



**Cardboard box opener**





# Cover strip

## Instruction for mounting the cover strip

Secure the cover strip!

- Observe the instruction for mounting!  
Please request the "Mounting instructions for cover strip".

## Advantages

The cover strip is easy to clip on and remove.

- This considerably facilitates and speeds up the mounting process:
  - No need to plug every single bore.
  - No waiting time while waiting for adhesive to harden when using adhesive tape.
- Can be mounted and dismantled several times (up to four times).

## Versions and functions

### A Cover strip with snap fit (standard)

- The cover strip is clipped on before the ball runner block is mounted and fits tightly.




### B Cover strip with sliding fit

- For mounting or replacing a cover strip, if the ball runner block or connection structure cannot be removed.
- A section of the snap fit cover strip is very slightly widened and can then be easily slid under the ball runner block.

An expanding tool for cover strips can be used to create a sliding fit after installation.

In particular, the sliding length  $L_S$  can be adapted in accordance with the installation case.

- ⚠ The cover strip is a precision-machined part that requires careful handling. Above all, it must not be bent.  
Risk of injury at the edges and ends of the cover strip!  
Wear gloves.

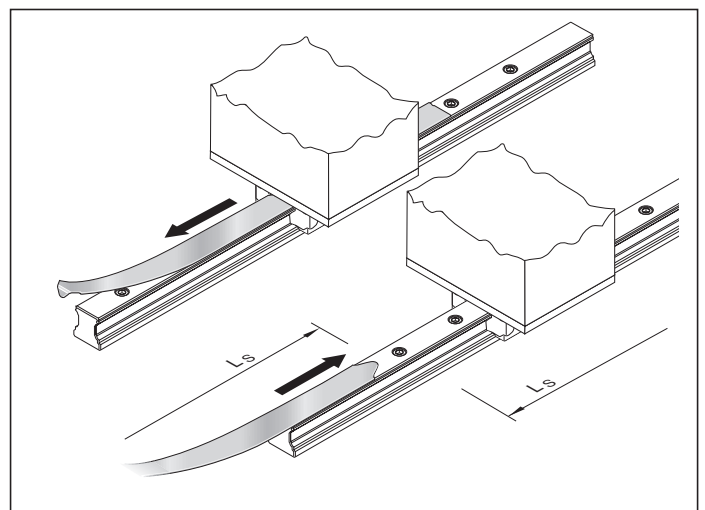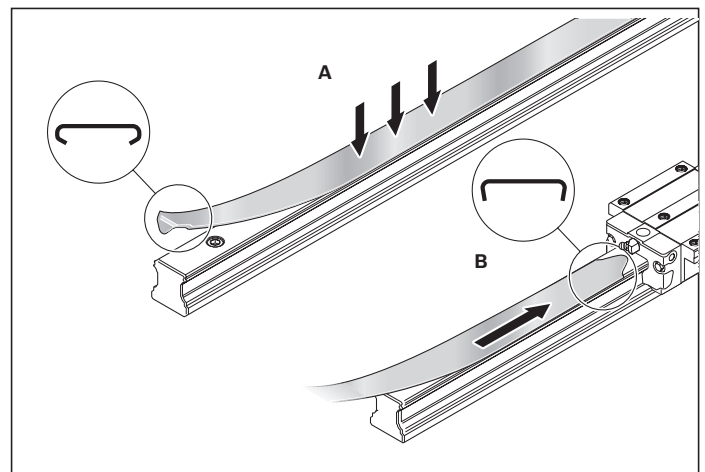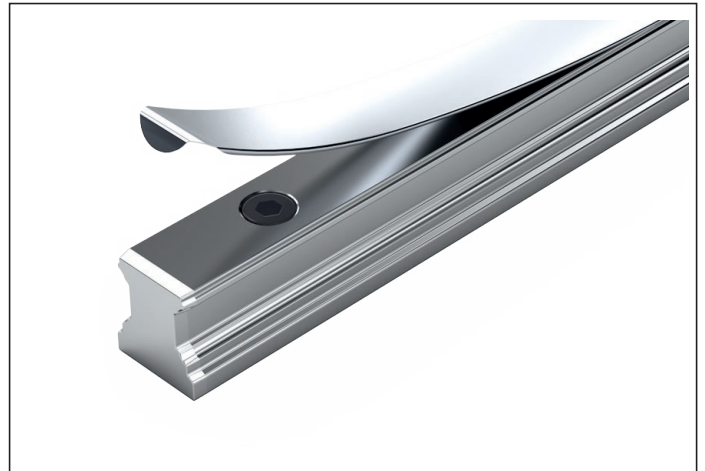

Material numbers, dimension drawing, dimensions and gravity see following pages.

Cover strip

Loose cover strip


For initial installation, storage and replacement

**Note**  
A suitable cover strip with snap fit or with sliding fit is available for each ball guide rail SNS.


**Ordering example 1**  
**(standard cover strip with tight fit)**

- ▶ Ball guide rail SNS
- ▶ Size 35
- ▶ Rail length  
L = 2696 mm

Material number:  
**R1619 330 20, 2696 mm**

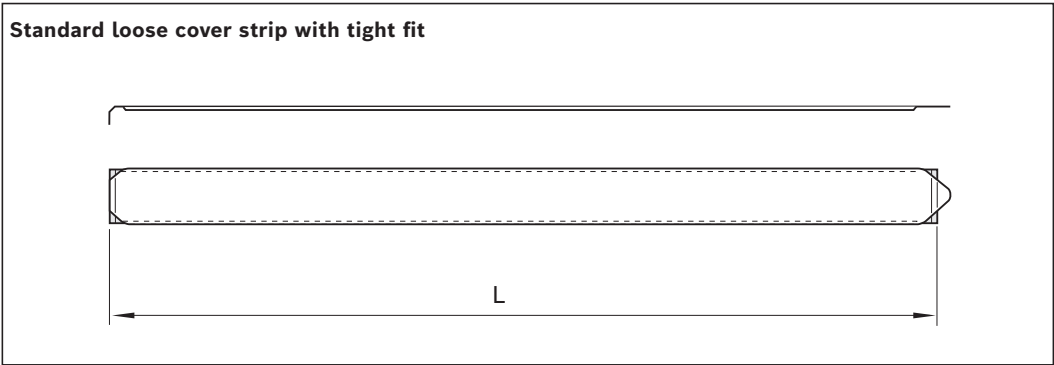

| Size | Standard loose cover strip with tight fit<br>Material number, rail length L (mm) | Mass<br>(g/m) |
|------|----------------------------------------------------------------------------------|---------------|
| 15   | R1619 130 00, ...                                                                | 10            |
| 20   | R1619 830 00, ...                                                                | 29            |
| 25   | R1619 230 00, ...                                                                | 32            |
| 30   | R1619 730 00, ...                                                                | 40            |
| 35   | R1619 330 20, ...                                                                | 80            |
| 45   | R1619 430 20, ...                                                                | 100           |
| 55   | R1619 530 20, ...                                                                | 120           |
| 65   | R1619 630 20, ...                                                                | 148           |

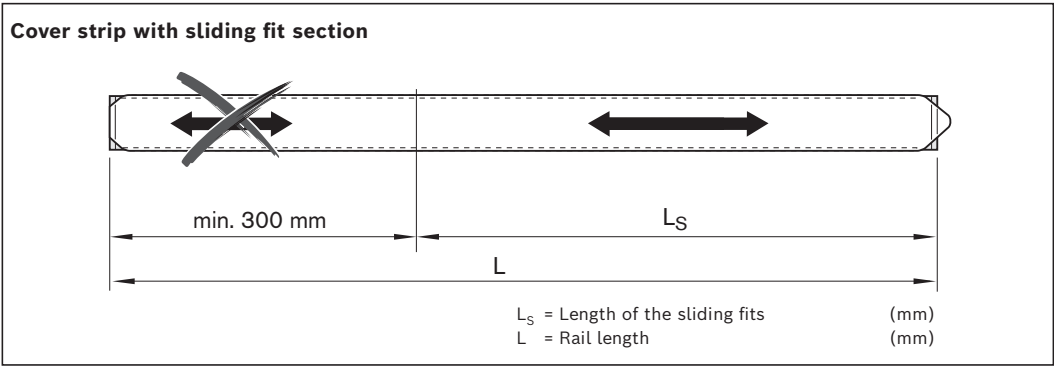

**Ordering example 2**  
**(cover strip with sliding fit section)**

- ▶ Ball guide rail SNS
- ▶ Size 35
- ▶ Rail length  
L = 2696 mm
- ▶ Length of sliding fit section  
L<sub>s</sub> = 1200 mm

Material number:  
**R1619 330 30, 2696, 1200 mm**

| Size | Cover strip with sliding fit section<br>Material number, rail length L (mm),<br>Length of sliding fit section L <sub>s</sub> (mm) | Mass<br>(g/m) |
|------|-----------------------------------------------------------------------------------------------------------------------------------|---------------|
| 15   | R1619 130 10, ...                                                                                                                 | 10            |
| 20   | R1619 830 10, ...                                                                                                                 | 29            |
| 25   | R1619 230 10, ...                                                                                                                 | 32            |
| 30   | R1619 730 10, ...                                                                                                                 | 40            |
| 35   | R1619 330 30, ...                                                                                                                 | 80            |
| 45   | R1619 430 30, ...                                                                                                                 | 100           |
| 55   | R1619 530 30, ...                                                                                                                 | 120           |
| 65   | R1619 630 30, ...                                                                                                                 | 148           |

**Expanding tool**

For creating a sliding fit in the cover strip




| Size | Material number | Mass (g) |
|------|-----------------|----------|
| 15   | R1619 115 10    | 40       |
| 20   | R1619 815 10    | 50       |
| 25   | R1619 215 10    | 80       |
| 30   | R1619 715 10    | 100      |
| 35   | R1619 315 30    | 100      |
| 45   | R1619 415 30    | 130      |
| 55   | R1619 515 30    | 210      |
| 65   | R1619 615 30    | 270      |

**Cover strip mounting kit**

Mounting device and lift-off plate

**Instruction for mounting**

- To clip on the cover strip, a mounting device (A) is available; for removal, there is a lift-off plate (B).

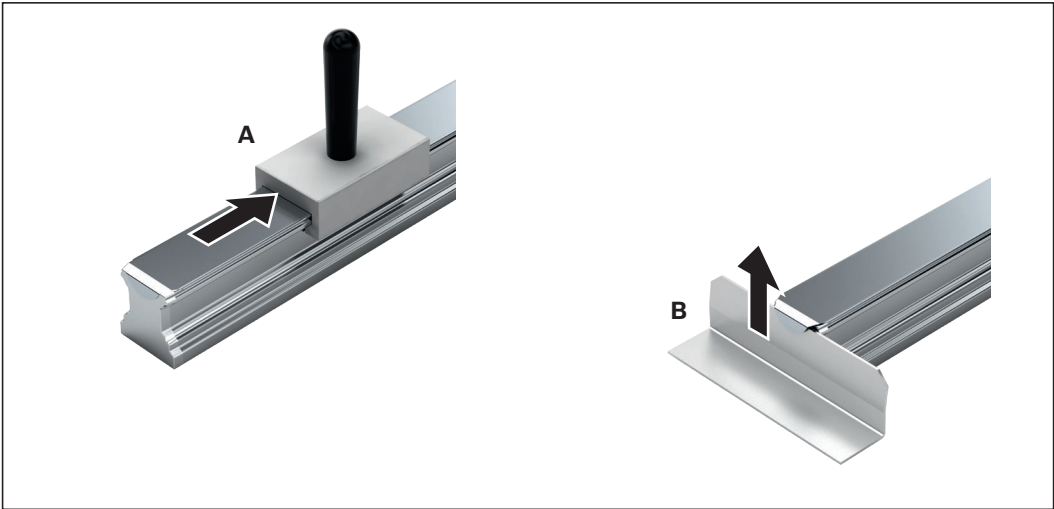

| Size | Material number | Mass (g) |
|------|-----------------|----------|
| 25   | R1619 210 80    | 170      |
| 30   | R1619 710 80    | 200      |
| 35   | R1619 310 60    | 200      |
| 45   | R1619 410 60    | 210      |
| 55   | R1619 510 60    | 210      |
| 65   | R1619 610 60    | 280      |

**Observe the instruction for mounting!**


- Please request the "Mounting instructions for cover strip".

## Cover strip

### Retainer for cover strip

#### Instruction for mounting

- ▶ Rexroth recommends the use of strip clamps:
- ▶ This prevents accidental lifting of the rail seal and infiltration of dirt
- ▶ Secures the cover strip

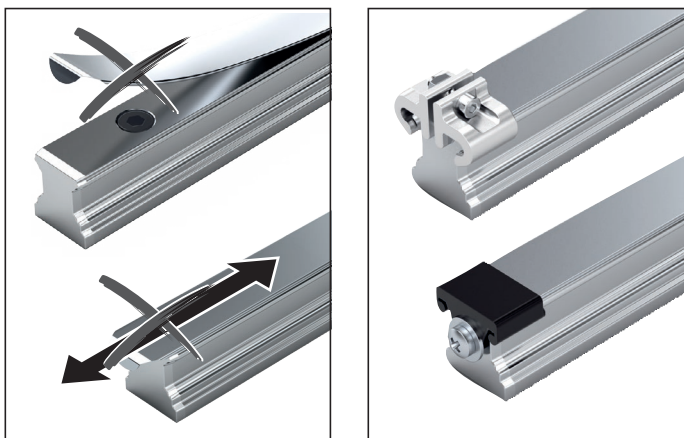


### Strip clamps

#### For ball guide rails without threaded holes at the end faces

#### Material:

- ▶ Aluminum strip clamps (anodized)
- ▶ Clamping screw and nut made of corrosion-resistant steel as per DIN EN 10088




| Size | Set (2 pieces per unit)                                                            |             | Bulk packaging (100 pieces per unit)                                                 |              |
|------|------------------------------------------------------------------------------------|-------------|--------------------------------------------------------------------------------------|--------------|
|      |  |             |  |              |
|      | Material number<br>(unit)                                                          | Mass<br>(g) | Material number<br>(unit)                                                            | Mass<br>(kg) |
| 15   | R1619 139 50                                                                       | 11          | R1619 139 60                                                                         | 0.55         |
| 20   | R1619 839 50                                                                       | 13          | R1619 839 60                                                                         | 0.65         |
| 25   | R1619 239 50                                                                       | 14          | R1619 239 60                                                                         | 0.70         |
| 30   | R1619 739 50                                                                       | 22          | R1619 739 60                                                                         | 1.10         |
| 35   | R1619 339 50                                                                       | 30          | R1619 339 60                                                                         | 1.50         |
| 45   | R1619 439 50                                                                       | 56          | R1619 439 60                                                                         | 2.80         |
| 55   | R1619 539 50                                                                       | 62          | R1619 539 60                                                                         | 3.10         |
| 65   | R1619 639 50                                                                       | 84          | R1619 639 60                                                                         | 4.20         |

### Protective caps

#### For ball guide rails with threaded holes at the end faces

#### Material:

- ▶ Plastic protective cap, black
- ▶ Screw made of corrosion-resistant steel as per DIN EN 10088
- ▶ Washer made of galvanized steel

| Size | Single cap                                                                          |               | Set (2 pieces per unit with screw)                                                  |             | Bulk packaging                                                                        |              |
|------|-------------------------------------------------------------------------------------|---------------|-------------------------------------------------------------------------------------|-------------|---------------------------------------------------------------------------------------|--------------|
|      |  |               |  |             |  |              |
|      | Material number<br>(without screw)                                                  | Weight<br>(g) | Material number<br>(unit)                                                           | Mass<br>(g) | Material number/piece<br>(without screws)                                             | Mass<br>(kg) |
| 15   | R1619 139 00                                                                        | 0.8           | R1619 139 20                                                                        | 5.5         | R1619 139 01 / 1000                                                                   | 0.8          |
| 20   | R1619 839 00                                                                        | 0.9           | R1619 839 20                                                                        | 6.0         | R1619 839 01 / 1000                                                                   | 0.9          |
| 25   | R1619 239 00                                                                        | 1.0           | R1619 239 20                                                                        | 7.0         | R1619 239 01 / 1000                                                                   | 1.3          |
| 30   | R1619 739 00                                                                        | 1.7           | R1619 739 20                                                                        | 9.0         | R1619 739 01 / 1000                                                                   | 1.7          |
| 35   | R1619 339 00                                                                        | 2.0           | R1619 339 20                                                                        | 10.0        | R1619 339 01 / 1000                                                                   | 2.5          |
| 45   | R1619 439 00                                                                        | 4.0           | R1619 439 20                                                                        | 13.0        | R1619 439 01 / 700                                                                    | 2.6          |
| 55   | R1619 539 00                                                                        | 4.0           | R1619 539 20                                                                        | 20.0        | R1619 539 01 / 500                                                                    | 2.1          |
| 65   | R1619 639 00                                                                        | 6.0           | R1619 639 20                                                                        | 20.0        | R1619 639 01 / 300                                                                    | 1.7          |

# Caps

## Plastic caps

| Size  | Single cap<br>Material numbers | Mass (g) |
|-------|--------------------------------|----------|
| 15    | R1605 100 80                   | 0.05     |
| 20    | R1605 800 80                   | 0.10     |
| 25    | R1605 200 80                   | 0.30     |
| 30    | R1605 300 80                   | 0.60     |
| 35    | R1605 300 80                   | 0.60     |
| 45    | R1605 400 80                   | 1.00     |
| 55    | R1605 500 80                   | 1.70     |
| 65    | R1605 600 80                   | 2.10     |
| 20/40 | R1605 100 80                   | 0.05     |
| 25/70 | R1605 200 80                   | 0.30     |
| 35/90 | R1605 300 80                   | 0.60     |




## Note

- Observe the instruction for mounting!  
Please request the "Mounting instructions for ball rail systems".

## Caps made of steel

| Size  | Single cap made of machining steel<br>Material numbers | Mass (g) |
|-------|--------------------------------------------------------|----------|
| 25    | R1606 200 75                                           | 2        |
| 30    | R1606 300 75                                           | 3        |
| 35    | R1606 300 75                                           | 3        |
| 45    | R1606 400 75                                           | 6        |
| 55    | R1606 500 75                                           | 8        |
| 65    | R1606 600 75                                           | 9        |
| 25/70 | R1606 200 75                                           | 2        |
| 35/90 | R1606 300 75                                           | 3        |



## Notes

- Caps made of steel are not included in the scope of delivery of the ball guide rails.  
**Order the mounting tool too!**
- Observe the instruction for mounting!  
Please request the "Mounting instructions for ball rail systems".


## Mounting tool for caps made of steel

### Two-piece, with mounting instructions


The two-piece mounting tool is suitable for caps in built-in ball guide rail.

| Size  | Material numbers           | Mass (kg) |
|-------|----------------------------|-----------|
| 25    | R1619 210 00 <sup>1)</sup> | 0.37      |
| 30    | R1619 710 00 <sup>1)</sup> | 0.37      |
| 35    | R1619 310 10               | 0.57      |
| 45    | R1619 410 10               | 0.85      |
| 55    | R1619 510 10               | 1.50      |
| 65    | R1619 610 00 <sup>1)</sup> | 1.85      |
| 25/70 | R1619 210 40               | 0.75      |
| 35/90 | R1619 310 40               | 1.05      |

- 1) Can only be delivered as one part.

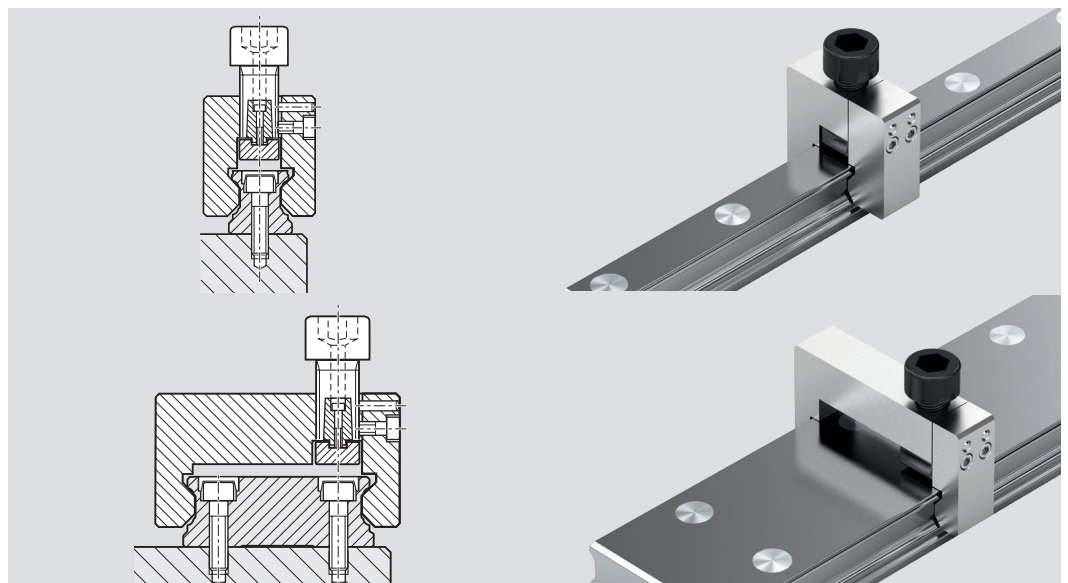


# Mounting runner block

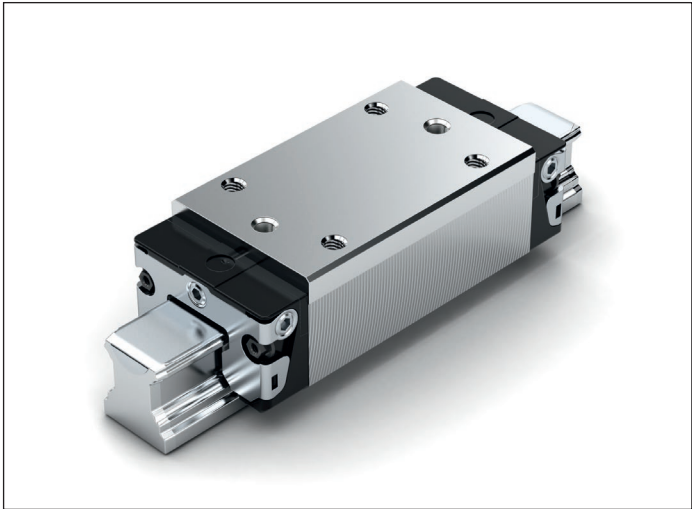

## Mounting runner block

- For highly accurate parallel alignment of ball rail systems (types SNS and SNO)
- For joint alignment of multi-piece ball guide rails (types SNS and SNO)

| Size | Material numbers | Dimensions (mm) |       |     |    | Mass<br>(kg) |
|------|------------------|-----------------|-------|-----|----|--------------|
|      |                  | A               | B     | T   | D  |              |
| 15   | R1629 121 90     | 34              | 72.6  | 43  | 6  | 0.2          |
| 20   | R1629 821 90     | 44              | 91    | 55  | 6  | 0.5          |
| 25   | R1629 221 90     | 48              | 107.9 | 60  | 8  | 0.8          |
| 30   | R1629 721 90     | 60              | 119.7 | 75  | 10 | 1.1          |
| 35   | R1629 321 90     | 70              | 139   | 80  | 10 | 2.2          |
| 45   | R1629 421 90     | 86              | 174.1 | 105 | 15 | 4.1          |
| 55   | R1629 521 90     | 100             | 199   | 120 | 18 | 6.0          |
| 65   | R1629 621 90     | 126             | 243   | 150 | 20 | 9.8          |

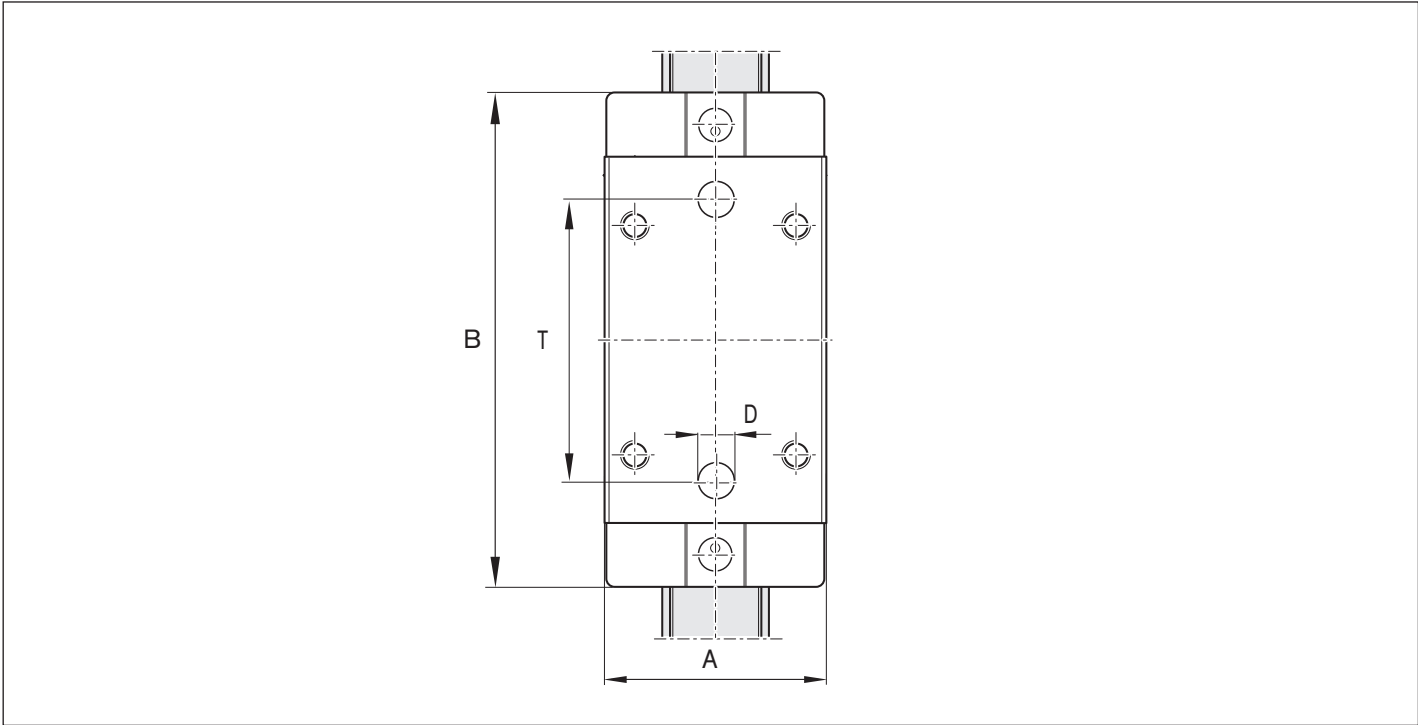


## Mounting with mounting runner block

### Alignment of parallel rails

- 1 Align and mount the first ball guide rail using a graduated straightedge.
- 2 Set up a mounting bridge with dial gauge between the ball runner blocks.
- 3 Move both ball runner blocks in parallel until the bores D of the mounting runner block are exactly over two fastening bores of the rail (provided that the drilling distances of the rail correspond to the spacing T).
- 4 Align the ball guide rail manually until the dial gauge shows the correct dimension.
- 5 Tighten the screws through the mounting runner block.

### Alignment of the multi-piece rails

- 1 Slide the multi-piece rails together at the joint.
- 2 Slide the mounting runner block over the center of the joint until both screw heads are visible. This is the case when the hole center distance of the joint corresponds to hole spacing T. If this is not the case, continue with point 5.
- 3 The mounting runner block automatically aligns the rails at the joint.
- 4 Tighten the screws through the mounting runner block.
- 5 If the screw center distances of the guide rail at the joint are not equal to the spacing and deviate from the hole spacing T of the mounting runner block, each screw must be tightened individually and then moved to the next hole.

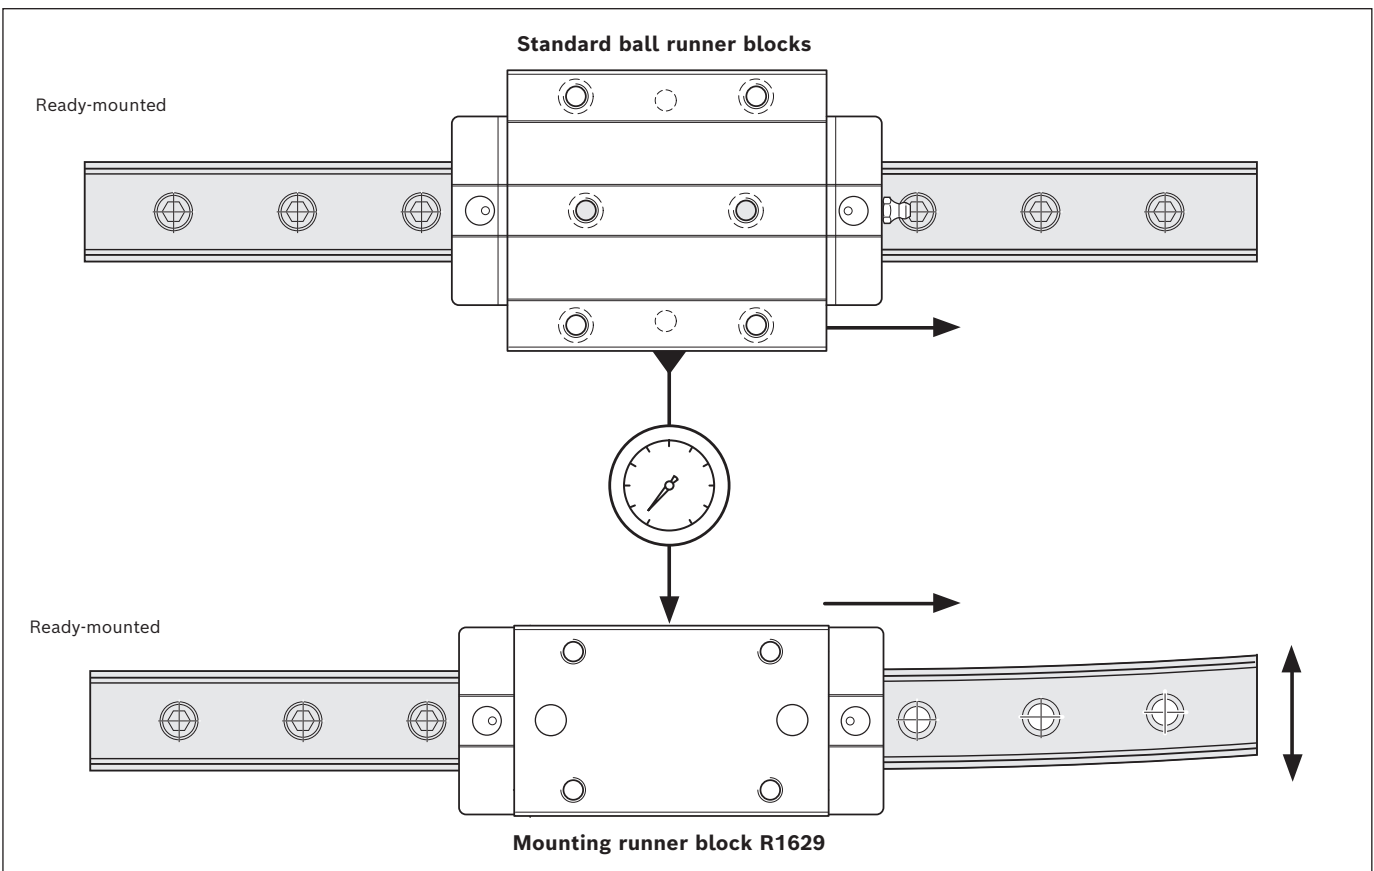

V-guide



V-guide

Lateral retention of ball guide rails

- Material: Steel
- Design: Black finished

Note

- Observe the instruction for mounting!  
Please request the "Mounting instructions for ball rail systems".

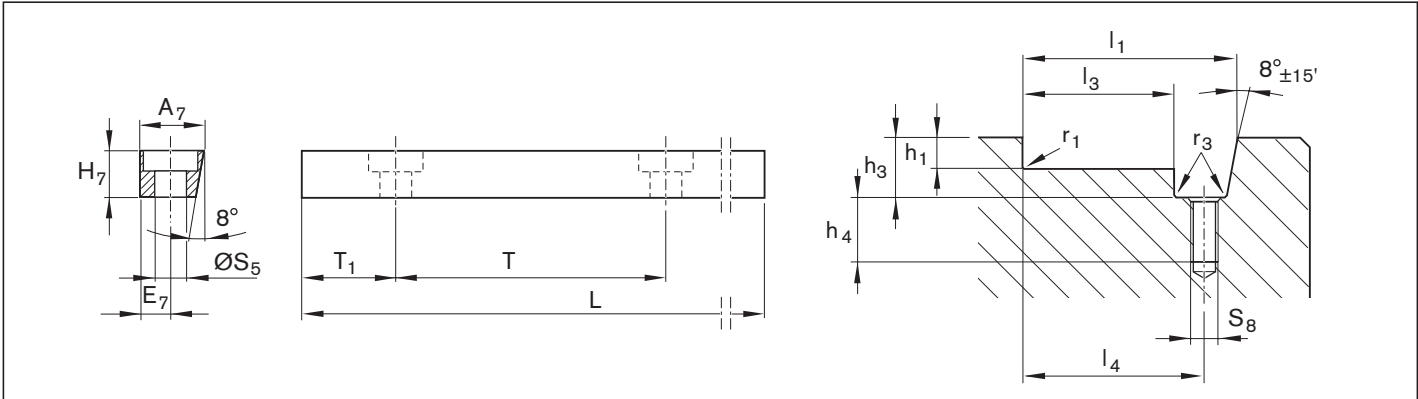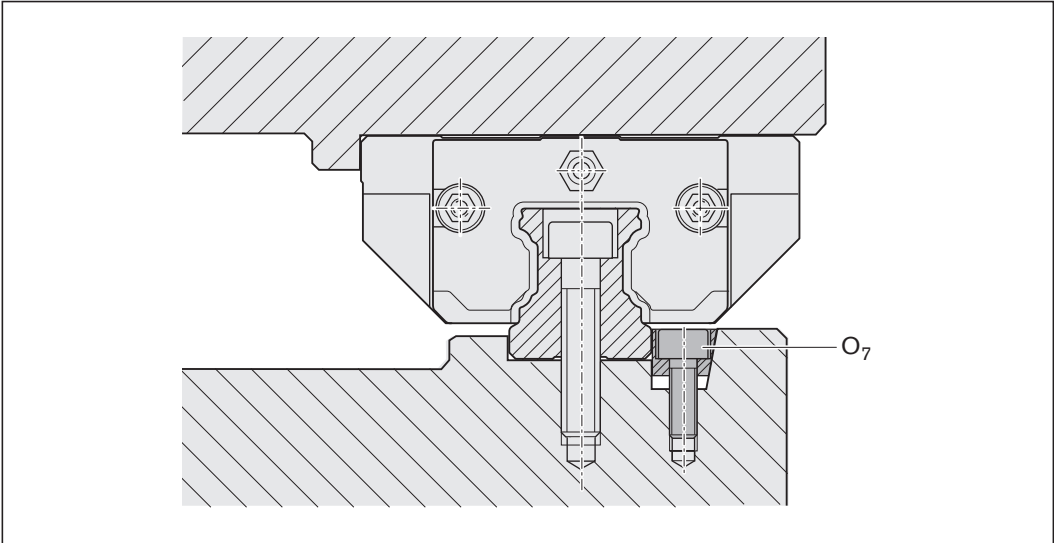

V-guide

| Size | Material number | Dimensions (mm) |                |                |     |                              |                |     |                | Mass (kg) |
|------|-----------------|-----------------|----------------|----------------|-----|------------------------------|----------------|-----|----------------|-----------|
|      |                 | A <sub>7</sub>  | E <sub>7</sub> | H <sub>7</sub> | L   | O <sub>7</sub> <sup>1)</sup> | S <sub>5</sub> | T   | T <sub>1</sub> |           |
| 15   | R1619 200 01    | 12.0            | 6              | 10             | 957 | M5x20                        | 6.0            | 60  | 28.5           | 0.8       |
| 20   |                 |                 |                |                |     |                              |                |     |                |           |
| 25   |                 |                 |                |                |     |                              |                |     |                |           |
| 30   |                 |                 |                |                |     |                              |                |     |                |           |
| 35   |                 |                 |                |                |     |                              |                |     |                |           |
| 45   | R1619 400 01    | 19.0            | 9              | 16             | 942 | M8x25                        | 9.0            | 105 | 51.0           | 2.0       |
| 55   |                 |                 |                |                |     |                              |                |     |                |           |
| 65   |                 |                 |                |                |     |                              |                |     |                |           |

1) Screw O<sub>7</sub> according to DIN 6912

V-guide slot

| Size | Dimensions (mm)                |                              |                              |                                 |                                |                                |                    |                    |                |
|------|--------------------------------|------------------------------|------------------------------|---------------------------------|--------------------------------|--------------------------------|--------------------|--------------------|----------------|
|      | h <sub>1</sub> <sup>-0.2</sup> | h <sub>3</sub> <sup>+1</sup> | h <sub>4</sub> <sup>+2</sup> | L <sub>1</sub> <sup>±0.05</sup> | L <sub>3</sub> <sup>-0.1</sup> | L <sub>4</sub> <sup>±0.1</sup> | r <sub>1</sub> max | r <sub>3</sub> max | S <sub>8</sub> |
| 15   | 3.5                            | 12.5                         | 15                           | 27                              | 14.9                           | 21                             | 0.4                | 0.5                | M5             |
| 20   | 4.0                            | 12.5                         | 15                           | 32                              | 19.9                           | 26                             | 0.5                | 0.5                | M5             |
| 25   | 4.0                            | 12.5                         | 15                           | 35                              | 22.9                           | 29                             | 0.8                | 0.5                | M5             |
| 30   | 5.0                            | 12.5                         | 15                           | 40                              | 27.9                           | 34                             | 0.8                | 0.5                | M5             |
| 35   | 6.0                            | 12.5                         | 15                           | 46                              | 33.9                           | 40                             | 0.8                | 0.5                | M5             |
| 45   | 8.0                            | 19.0                         | 16                           | 64                              | 44.9                           | 54                             | 0.8                | 0.5                | M8             |
| 55   | 10.0                           | 19.0                         | 16                           | 72                              | 52.9                           | 62                             | 1.2                | 0.5                | M8             |
| 65   | 10.0                           | 19.0                         | 16                           | 82                              | 62.9                           | 72                             | 1.2                | 0.5                | M8             |



## Cardboard box opener



- Tool for opening the guide rails packaging.
- Prevents risk of injury

### Ordering data

Material number R320105175

# Product description hydraulic clamping and braking units

## Application areas

### Clamping

- ▶ During mounting work and standstill of the machine **with** energy with hydraulic clamping and braking units (KBH)
- ▶ Of heavy handling systems
- ▶ Clamping of machine tables from heavily machined machining centers

### Brakes

- ▶ Support as brake for linear motors
- ▶ Of heavy handling systems

### Characteristic features

- ▶ Very high axial holding forces
- ▶ Dynamic and static stabilization in the axial direction
- ▶ Heavy-duty brake

## Further highlights

- ▶ Up to 1 million clamping cycles.
- ▶ Up to 2000 emergency braking operations
- ▶ Threaded on both sides for the hydraulic connection
- ▶ Solid, rigid steel housing, chemically nickel-plated
- ▶ High positioning accuracy
- ▶ Release pressure 150 bar
- ▶ Integrated all-round sealing
- ▶ Special pressure diaphragm technology for maximum functional reliability without pressure losses or leakage
- ▶ Brake shoes with integrated positive-locking, large-surface contact profiles for maximum axial rigidity
- ▶ Super heavy-duty model

### Special features of hydraulic clamping and braking units (KBH):

- ▶ Low displacement
- ▶ Compact version, compatible with DIN 645
- ▶ 10 million clamping cycles (B10d value)


⚠ Observe the safety instructions on clamping and braking units.

## Functional principle

### Hydraulic pressure: 50 - 150 bar

#### Clamps and brakes with compression


The large-scale clamping profiles are pressed directly through the hydraulic oil via a piston principle to the flanks of the ball guide rail.

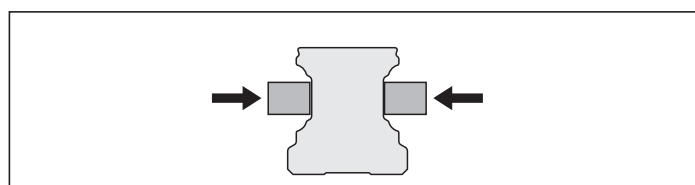


### Hydraulic pressure: 0 bar

#### Decompression with spring force


A preloaded return spring allows for short decompression cycles.

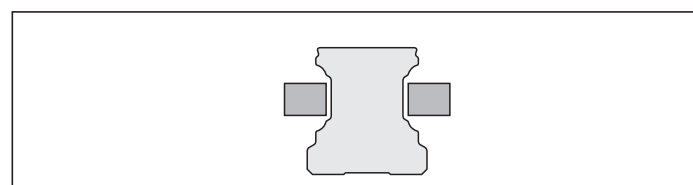

KBH, FLS

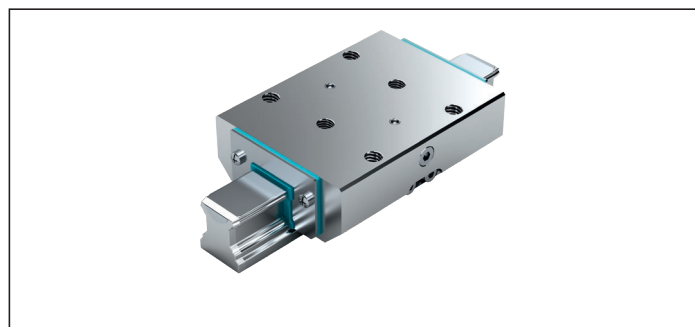

KBH, SLS

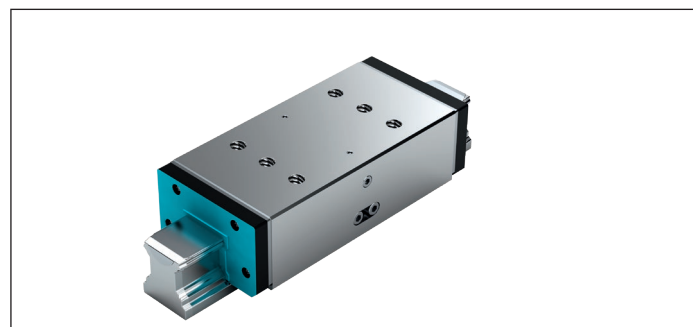

## **Additional information**

### **Hydraulic connections**

The hydraulic clamping units are pre-filled with HLP 46 at the factory. The hydraulic connection is attached on two sides. One connection is suitable for pressurization. Take care when venting fixed and flexible hydraulic lines because air ports can damage sealing elements.

### **Connection structure, mounting the clamping units**

To prevent detrimental effects, e.g. permanent grinding on the linear guide, the connection structure must be rigid and in accordance with its load and requirements. If the clamping units tilt, this can result in contact, wear and therefore damage to the linear guide.

The setting at the factory is adapted for the linear guide and may not be altered when mounting. It is imperative to observe the mounting instructions for the clamping and braking units and the linear guides.

Some spring-loaded accumulators are equipped with a transport lock between the contact profiles.

This must be removed when mounting by pressurizing the unit. When pressure is removed, the transport lock or the associated linear guide must always lie between the contact profiles.

The clamping units do not have any guiding function. A runner block can therefore not be replaced with a clamping unit.

The ideal position of the clamping unit lies between two runner blocks.

When using several clamping units, these should be distributed evenly on both guide rails in order to attain a maximum rigidity of the overall construction.

### **Lubrication**

When using the prescribed pressurizing medium, lubrication is not required.


### **Surface protection**

All housings of the Clamping Units are chemically nickel-plated and therefore have limited rust protection.

Aluminum subsections are chemically nickel-plated or hard-coated according to their requirement.

### **B10d value**

The B10dvalue specifies the number of switching cycles until 10% of components fail dangerously.

Hydraulic clamping and braking units, KBH<sup>1)</sup>, FLS**FLS****Flange, long, standard height****R1619 .40 21****Note**

Can be used on all SNS ball guide rails.


**Clamps and brakes with compression**

- ▶ Max. hydraulic operating pressure:
  - ▶ Size 25: 100 bar
  - ▶ Sizes 35 - 65: 150 bar
- ▶ Operating temperature range t: 0 – 70 °C

**Note on lubrication**

- ▶ Initial filling of hydraulic oil HLP46
- ▶ Check for compatibility when using different oils

⚠ Observe the safety instructions on clamping and braking units.

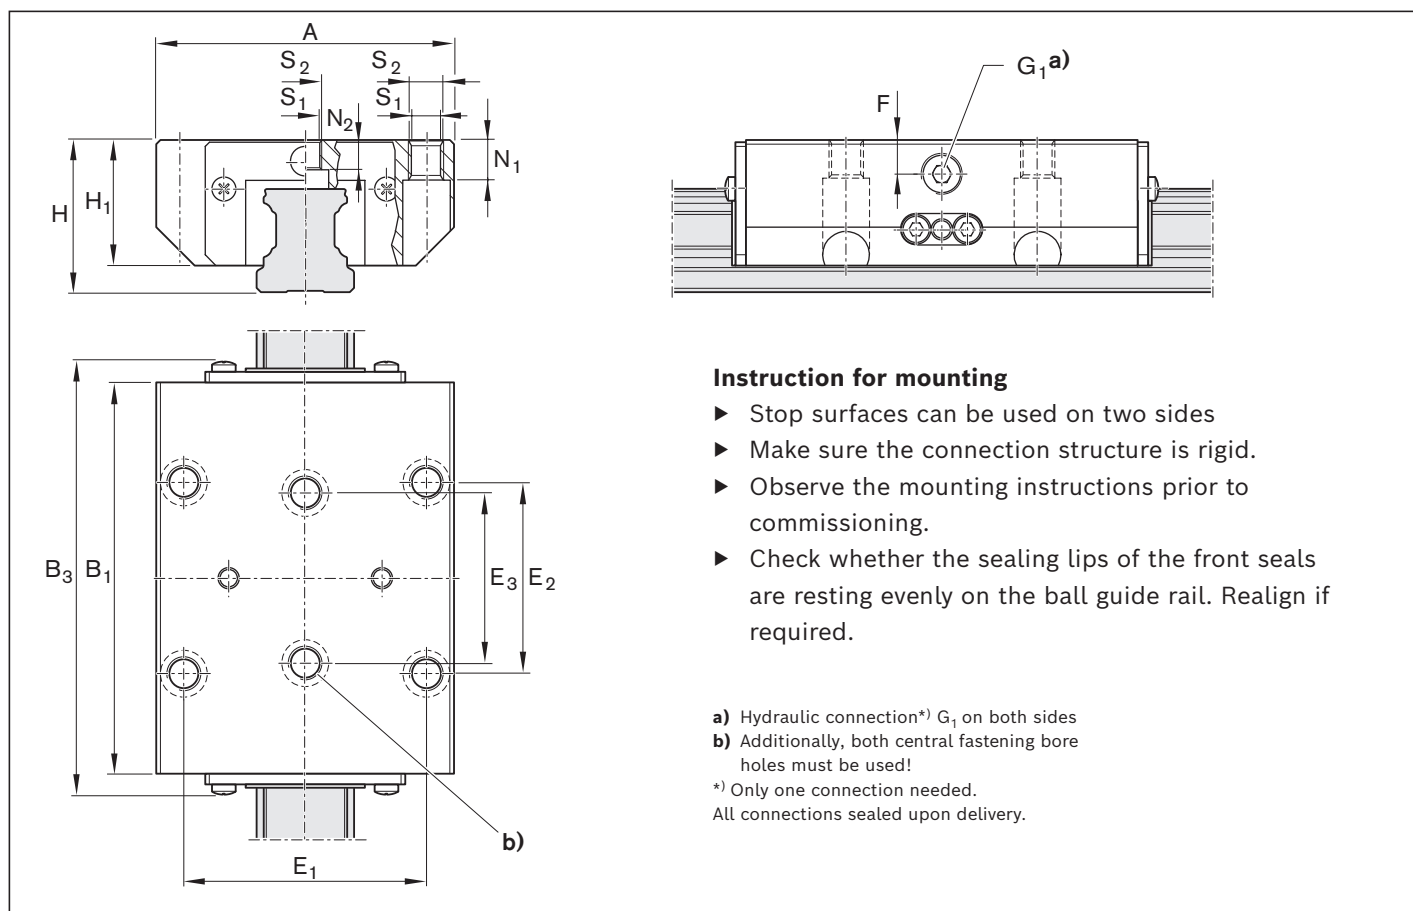**Instruction for mounting**

- ▶ Stop surfaces can be used on two sides
- ▶ Make sure the connection structure is rigid.
- ▶ Observe the mounting instructions prior to commissioning.
- ▶ Check whether the sealing lips of the front seals are resting evenly on the ball guide rail. Realign if required.

a) Hydraulic connection\*) G<sub>1</sub> on both sides

b) Additionally, both central fastening bore holes must be used!

\*) Only one connection needed.

All connections sealed upon delivery.

| Size | Material number | Holding force <sup>2)</sup><br>(N) | Dimensions (mm) |                |                    |    |                |                |                |                |         |                |                              |                              |                |                | Displacement <sup>7)</sup><br>(cm <sup>3</sup> ) | Mass<br>(kg) |
|------|-----------------|------------------------------------|-----------------|----------------|--------------------|----|----------------|----------------|----------------|----------------|---------|----------------|------------------------------|------------------------------|----------------|----------------|--------------------------------------------------|--------------|
|      |                 |                                    | A               | B <sub>1</sub> | B <sub>3 max</sub> | H  | H <sub>1</sub> | E <sub>1</sub> | E <sub>2</sub> | E <sub>3</sub> | F       | G <sub>1</sub> | N <sub>1</sub> <sup>5)</sup> | N <sub>2</sub> <sup>6)</sup> | S <sub>1</sub> | S <sub>2</sub> |                                                  |              |
| 25   | R1619 240 21    | 2 200 <sup>3)</sup>                | 70              | 92.0           | 102.3              | 36 | 29.5           | 57             | 45             | 40             | 8 1/8"  | 9              | 7.0                          | 6.8                          | M8             |                | 0.6                                              | 1.10         |
| 35   | R1619 340 21    | 5 700 <sup>4)</sup>                | 100             | 120.5          | 141.0              | 48 | 40.0           | 82             | 62             | 52             | 12 1/8" | 12             | 10.2                         | 8.6                          | M10            |                | 1.1                                              | 2.69         |
| 45   | R1619 440 21    | 9 900 <sup>4)</sup>                | 120             | 155.0          | 178.0              | 60 | 50.0           | 100            | 80             | 60             | 15 1/8" | 15             | 12.4                         | 10.5                         | M12            |                | 1.8                                              | 5.20         |
| 55   | R1619 540 21    | 13 700 <sup>4)</sup>               | 140             | 184.0          | 209.0              | 70 | 57.0           | 116            | 95             | 70             | 16 1/8" | 18             | 13.5                         | 12.5                         | M14            |                | 2.4                                              | 8.40         |
| 65   | R1619 640 21    | 22 700 <sup>4)</sup>               | 170             | 227.0          | 264.0              | 90 | 76.0           | 142            | 110            | 82             | 20 1/4" | 23             | 14.0                         | 14.5                         | M16            |                | 3.8                                              | 17.30        |

1) Zimmer GmbH

2) The inspection is done in a mounted state with a lubricated layer (ISO-VG 68).


3) At 100 bar

4) At 150 bar

5) For bolting from below with ISO 4762

6) For bolting from below with DIN 7984

7) Per clamping

Hydraulic clamping and braking units, KBH<sup>1)</sup>, SLS**SLS****Slimline, long, standard height****R1619 .40 20****Note**

Can be used on all SNS ball guide rails.



**Clamps and brakes with compression**

- ▶ Max. hydraulic operating pressure:
- ▶ Size 65: 150 bar
- ▶ Operating temperature range t: 0 – 70 °C

**Note on lubrication**

- ▶ Initial filling of hydraulic oil HLP46
- ▶ Check for compatibility when using different oils

⚠ Observe the safety instructions on clamping and braking units.

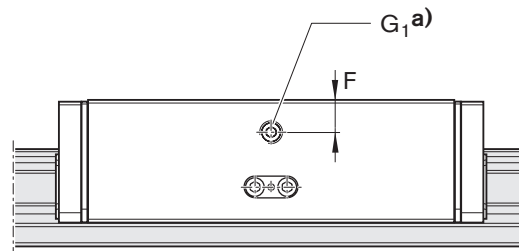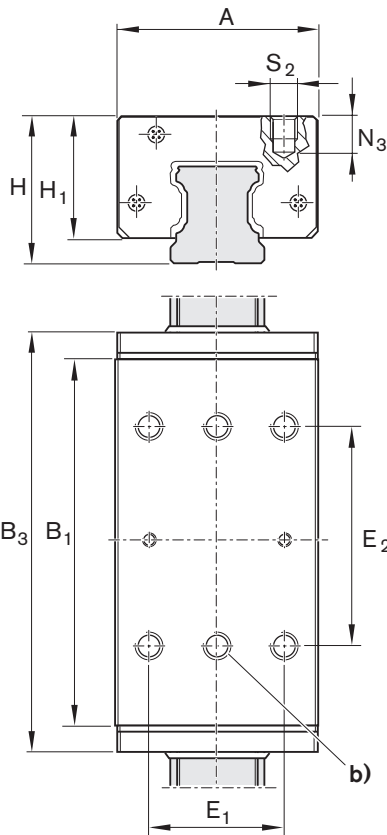**Instruction for mounting**

- ▶ Stop surfaces can be used on two sides
- ▶ Make sure the connection structure is rigid.
- ▶ Observe the mounting instructions prior to commissioning.
- ▶ Check whether the sealing lips of the front seals are resting evenly on the ball guide rail. Realign if required.

a) Hydraulic connection\*) G<sub>1</sub> on both sides

b) Additionally, both central fastening bore holes must be used!

\*) Only one connection needed.

All connections sealed upon delivery.

| Size | Material number | Holding force <sup>2)</sup><br>(N) | Dimensions (mm) |                |                    |    |                |                |                |    |                |                |                | Displacement <sup>4)</sup><br>(cm <sup>3</sup> ) | Mass<br>(kg) |
|------|-----------------|------------------------------------|-----------------|----------------|--------------------|----|----------------|----------------|----------------|----|----------------|----------------|----------------|--------------------------------------------------|--------------|
|      |                 |                                    | A               | B <sub>1</sub> | B <sub>3 max</sub> | H  | H <sub>1</sub> | E <sub>1</sub> | E <sub>2</sub> | F  | G <sub>1</sub> | N <sub>3</sub> | S <sub>2</sub> |                                                  |              |
| 65   | R1619 640 20    | 22 700 <sup>3)</sup>               | 126             | 227            | 264                | 90 | 76             | 76             | 120            | 20 | 1/4"           | 21             | M16            | 3.8                                              | 14.40        |

1) Zimmer GmbH

2) The inspection is done in a mounted state with a lubricated layer (ISO-VG 68).

3) At 150 bar

4) Per clamping

# Hydraulic clamping units, product description

## Application areas

- ▶ Clamping of heavy handling systems
- ▶ Clamping of machine tables from heavily machined machining centers

## Characteristic features

- ▶ Very high axial holding forces
- ▶ Compact version, compatible with DIN 645
- ▶ Dynamic and static stabilization in the axial direction

**⚠** Observe the safety instructions on clamping and braking units.

## Further highlights

- ▶ Threaded on both sides for the hydraulic connection
- ▶ Solid, rigid steel housing, chemically nickel-plated
- ▶ High positioning accuracy
- ▶ Continuously adjustable pressure from 50 - 150 bar
- ▶ Integrated all-round sealing
- ▶ Special pressure diaphragm technology for maximum functional reliability without pressure losses or leakage
- ▶ Integrated positive-locking, large-surface contact profiles for maximum axial rigidity

## Special features of the hydraulic clamping and braking units (KWH):


- ▶ 10 million clamping cycles (B10d value)

## Functional principle

### Hydraulic pressure: 50 - 150 bar

#### Clamps with compression


The large-scale clamping profiles are pressed directly through the hydraulic oil via a piston principle to the flanks of the ball guide rail.

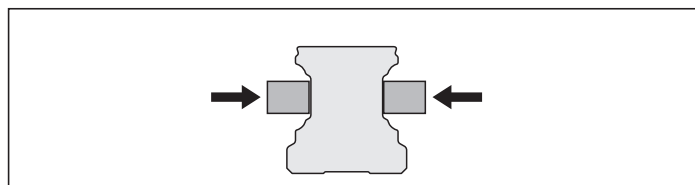

### Hydraulic pressure: 0 bar


#### Decompression with spring force

A preloaded return spring allows for short decompression cycles.

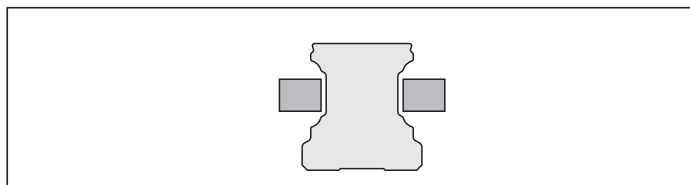


## Model overview of accessories for hydraulic clamping units


KWH, FLS

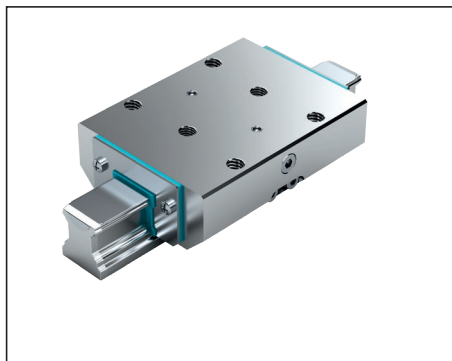


KWH, SLS

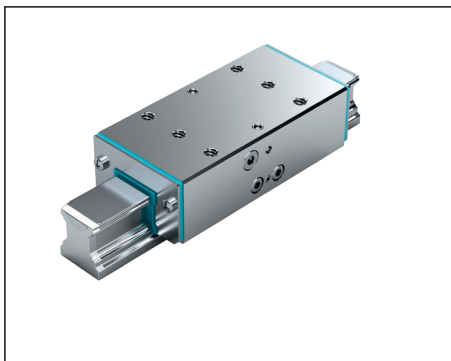

KWH, SLH

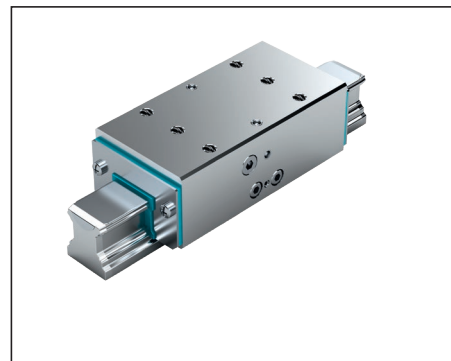

# Hydraulic clamping units KWH<sup>1)</sup>, FLS



## FLS - Flange, long, standard height

**R1619 .42 11**

### Note

Can be used on all SNS ball guide rails.




### Clamps with compression

- ▶ Max. hydraulic operating pressure:
  - ▶ Sizes 25 - 30: 100 bar
  - ▶ Sizes 35 - 65: 150 bar
- ▶ Operating temperature range t: 0 – 70 °C

### Note on lubrication

- ▶ Initial filling of hydraulic oil HLP46
- ▶ Check for compatibility when using different oils

⚠ Observe the safety instructions on clamping and braking units.

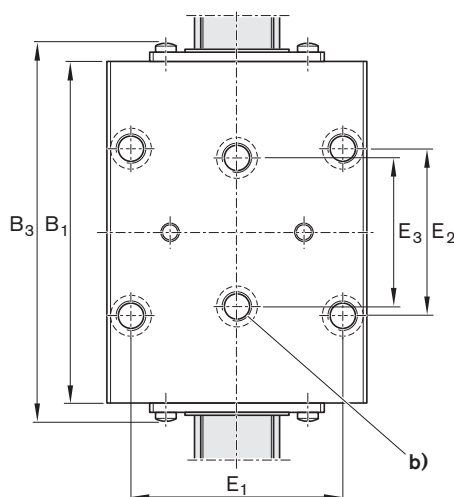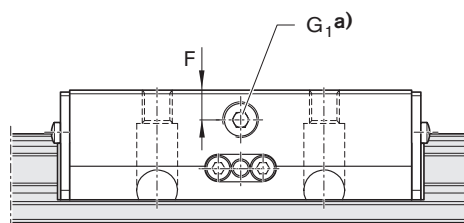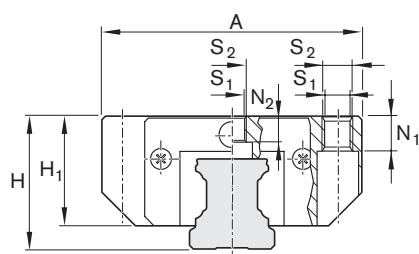

### Instruction for mounting

- ▶ Stop surfaces can be used on two sides
- ▶ Make sure the connection structure is rigid.
- ▶ Observe the mounting instructions prior to commissioning.
- ▶ Check whether the sealing lips of the front seals are resting evenly on the ball guide rail. Realign if required.

a) Hydraulic connection\*) G<sub>1</sub> on both sides

b) Additionally, both central fastening bore holes must be used!

\*) Only one connection needed.

All connections sealed upon delivery.

| Size | Material number | Holding force <sup>2)</sup><br>(N) | Dimensions (mm) |                |                    |    |                |                |                |                |      |                |                              |                              |                |                | Displacement <sup>7)</sup><br>(cm <sup>3</sup> ) | Mass<br>(kg) |
|------|-----------------|------------------------------------|-----------------|----------------|--------------------|----|----------------|----------------|----------------|----------------|------|----------------|------------------------------|------------------------------|----------------|----------------|--------------------------------------------------|--------------|
|      |                 |                                    | A               | B <sub>1</sub> | B <sub>3 max</sub> | H  | H <sub>1</sub> | E <sub>1</sub> | E <sub>2</sub> | E <sub>3</sub> | F    | G <sub>1</sub> | N <sub>1</sub> <sup>5)</sup> | N <sub>2</sub> <sup>6)</sup> | S <sub>1</sub> | S <sub>2</sub> |                                                  |              |
| 25   | R1619 242 11    | 2 200 <sup>3)</sup>                | 70              | 92.0           | 102.3              | 36 | 29.5           | 57             | 45             | 40             | 8.0  | 1/8"           | 9                            | 7.0                          | 6.8            | M8             | 0.6                                              | 1.22         |
| 30   | R1619 742 11    | 3 000 <sup>3)</sup>                | 90              | 103.5          | 115.4              | 42 | 35.0           | 72             | 52             | 44             | 10.5 | 1/8"           | 11                           | 8.0                          | 8.6            | M10            | 0.7                                              | 2.09         |
| 35   | R1619 342 11    | 5 700 <sup>4)</sup>                | 100             | 120.5          | 133.0              | 48 | 40.0           | 82             | 62             | 52             | 12.0 | 1/8"           | 12                           | 10.2                         | 8.6            | M10            | 1.1                                              | 2.69         |
| 45   | R1619 442 11    | 9 900 <sup>4)</sup>                | 120             | 155.0          | 170.0              | 60 | 50.0           | 100            | 80             | 60             | 15.0 | 1/8"           | 15                           | 12.4                         | 10.5           | M12            | 1.8                                              | 5.32         |
| 55   | R1619 542 11    | 13 700 <sup>4)</sup>               | 140             | 184.0          | 201.0              | 70 | 57.0           | 116            | 95             | 70             | 16.0 | 1/8"           | 18                           | 13.5                         | 12.5           | M14            | 2.4                                              | 8.40         |
| 65   | R1619 642 11    | 22 700 <sup>4)</sup>               | 170             | 227.0          | 256.0              | 90 | 76.0           | 142            | 110            | 82             | 20.0 | 1/4"           | 23                           | 14.0                         | 14.5           | M16            | 3.8                                              | 17.30        |

1) Zimmer GmbH

2) The inspection is done in a mounted state with a lubricated layer (ISO-VG 68). Permissible holding force 173

3) At 100 bar


4) At 150 bar

5) For bolting from below with ISO 4762

6) For bolting from below with DIN 7984

7) Per clamping

# Hydraulic clamping units KWH<sup>1)</sup>, SLS



## SLS - Slimline, long, standard height

**R1619 .42 51**

### Note

Can be used on all SNS ball guide rails.




### Clamps with compression

- ▶ Max. hydraulic operating pressure:
  - ▶ Sizes 25 - 45: 100 bar
  - ▶ Sizes 55 - 65: 150 bar
- ▶ Operating temperature range t: 0 – 70 °C

### Note on lubrication

- ▶ Initial filling of hydraulic oil HLP46
- ▶ Check for compatibility when using different oils

**!** Observe the safety instructions on clamping and braking units.

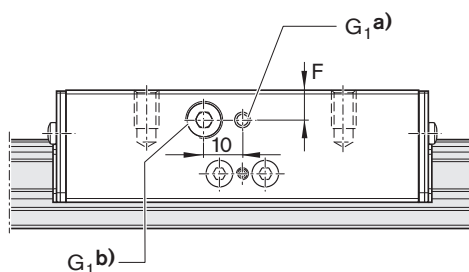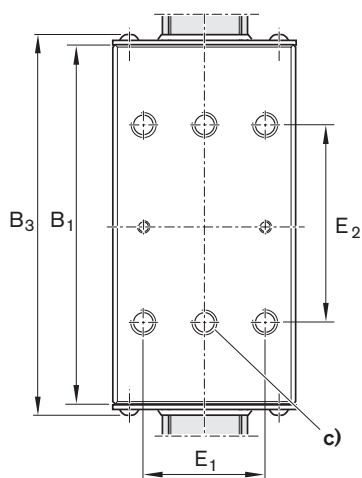

### Instruction for mounting

- ▶ Stop surfaces can be used on two sides
- ▶ Make sure the connection structure is rigid.
- ▶ Observe the mounting instructions prior to commissioning.
- ▶ Check whether the sealing lips of the front seals are resting evenly on the ball guide rail. Realign if required.

a) Hydraulic connection\*) G<sub>1</sub> on both sides

b) Hydraulic connection\*) G<sub>1</sub> on both sides for sizes 25 - 30

c) In addition, both fastening bores must be used!

\*) Only one connection needed.

All connections sealed upon delivery.

| Size | Material number | Holding force <sup>2)</sup> (N) | Dimensions (mm) |                |                    |    |                |                |                |    |                |                |                | Displacement <sup>5)</sup> (cm <sup>3</sup> ) | Mass (kg) |
|------|-----------------|---------------------------------|-----------------|----------------|--------------------|----|----------------|----------------|----------------|----|----------------|----------------|----------------|-----------------------------------------------|-----------|
|      |                 |                                 | A               | B <sub>1</sub> | B <sub>3 max</sub> | H  | H <sub>1</sub> | E <sub>1</sub> | E <sub>2</sub> | F  | G <sub>1</sub> | N <sub>3</sub> | S <sub>2</sub> |                                               |           |
| 25   | R1619 242 51    | 1 600 <sup>3)</sup>             | 48              | 92.0           | 102.3              | 36 | 29.5           | 35             | 50             | 8  | 1/8"           | 8              | M6             | 0.6                                           | 1.22      |
| 30   | R1619 742 51    | 3 000 <sup>3)</sup>             | 60              | 103.5          | 115.4              | 42 | 35.0           | 40             | 60             | 9  | 1/8"           | 8              | M8             | 0.7                                           | 2.09      |
| 35   | R1619 342 51    | 3 500 <sup>3)</sup>             | 70              | 120.5          | 134.0              | 48 | 40.0           | 50             | 72             | 12 | 1/8"           | 13             | M8             | 1.1                                           | 2.02      |
| 45   | R1619 442 51    | 7 400 <sup>3)</sup>             | 86              | 155.0          | 170.0              | 60 | 50.0           | 60             | 80             | 15 | 1/8"           | 15             | M10            | 1.8                                           | 4.00      |
| 55   | R1619 542-51    | 13 700 <sup>4)</sup>            | 100             | 184.0          | 201.0              | 70 | 57.0           | 75             | 95             | 16 | 1/8"           | 18             | M12            | 2.4                                           | 6.10      |
| 65   | R1619 642 51    | 22 700 <sup>4)</sup>            | 126             | 227.0          | 256.0              | 90 | 76.0           | 76             | 120            | 20 | 1/4"           | 21             | M16            | 3.8                                           | 14.40     |

1) Zimmer GmbH

2) The inspection is done in a mounted state with a lubricated layer (ISO-VG 68). Permissible holding force 173


3) At 100 bar

4) At 150 bar

5) Per clamping



# Hydraulic clamping units KWH<sup>1)</sup>, SLH



## SLH - Slimline, long, high

**R1619 .42 31**

### Note

Can be used on all SNS ball guide rails.




### Clamps with compression

- ▶ Max. hydraulic operating pressure:
  - ▶ Size 25 - 45 : 100 bar
  - ▶ Size 55 : 150 bar
- ▶ Operating temperature range t: 0 – 70 °C

### Note on lubrication

- ▶ Initial filling of hydraulic oil HLP46
- ▶ Check for compatibility when using different oils

⚠ Observe the safety instructions on clamping and braking units.

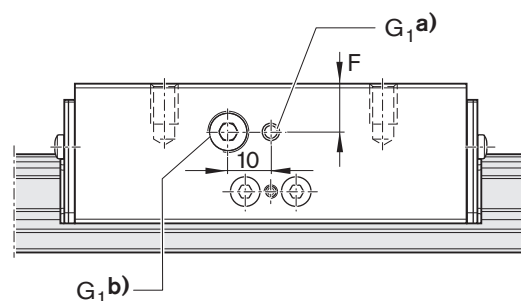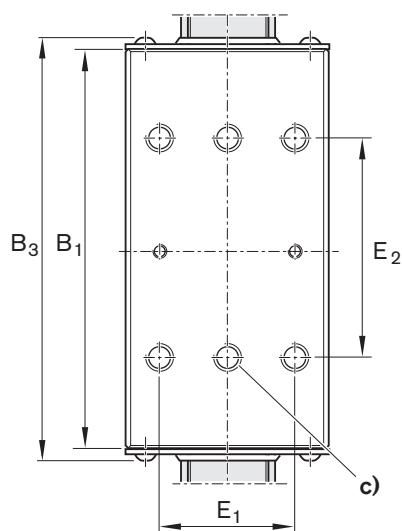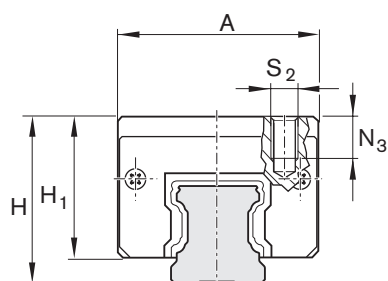

### Instruction for mounting

- ▶ Stop surfaces can be used on two sides
- ▶ Make sure the connection structure is rigid.
- ▶ Observe the mounting instructions prior to commissioning.
- ▶ Check whether the sealing lips of the front seals are resting evenly on the ball guide rail. Realign if required.

a) Hydraulic connection\*) G<sub>1</sub> on both sides

b) Hydraulic connection\*) G<sub>1</sub> on both sides for sizes 25 - 30

c) Additionally, both central fastening bore holes must be used!

\*) Only one connection needed.

All connections sealed upon delivery.

| Size | Material number | Holding force <sup>2)</sup> (N) | Dimensions (mm) |                |                    |    |                |                |                |    |                |                |                | Displacement <sup>5)</sup> (cm <sup>3</sup> ) | Mass (kg) |
|------|-----------------|---------------------------------|-----------------|----------------|--------------------|----|----------------|----------------|----------------|----|----------------|----------------|----------------|-----------------------------------------------|-----------|
|      |                 |                                 | A               | B <sub>1</sub> | B <sub>3 max</sub> | H  | H <sub>1</sub> | E <sub>1</sub> | E <sub>2</sub> | F  | G <sub>1</sub> | N <sub>3</sub> | S <sub>2</sub> |                                               |           |
| 25   | R1619 242 31    | 1 600 <sup>3)</sup>             | 48              | 92.0           | 102.3              | 40 | 33.5           | 35             | 50             | 12 | 1/8"           | 12             | M6             | 0.6                                           | 1.10      |
| 30   | R1619 742 31    | 3 000 <sup>3)</sup>             | 60              | 103.5          | 115.4              | 45 | 38.0           | 40             | 60             | 12 | 1/8"           | 11             | M8             | 0.7                                           | 1.90      |
| 35   | R1619 342 31    | 3 500 <sup>3)</sup>             | 70              | 120.5          | 134.0              | 55 | 47.0           | 50             | 72             | 18 | 1/8"           | 13             | M8             | 1.1                                           | 2.46      |
| 45   | R1619 442 31    | 7 400 <sup>3)</sup>             | 86              | 155.0          | 170.0              | 70 | 60.0           | 60             | 80             | 24 | 1/8"           | 18             | M10            | 1.8                                           | 4.95      |
| 55   | R1619 542 31    | 13 700 <sup>4)</sup>            | 100             | 184.0          | 201.0              | 80 | 67.0           | 75             | 95             | 26 | 1/8"           | 19             | M12            | 2.4                                           | 7.90      |

1) Zimmer GmbH

2) The inspection is done in a mounted state with a lubricated layer (ISO-VG 68). Permissible holding force  173

3) At 100 bar

4) At 150 bar

5) Per clamping

# Pneumatic clamping and braking units, product description

## Application areas

### Clamping

- ▶ In the event of loss of pressure
- ▶ During assembly work and standstill of the machine without energy
- ▶ Of machine tables from machining centers
- ▶ Of z-axis positioning in the resting position

### Brakes

- ▶ In the event of energy failure
- ▶ In the event of a pressure drop
- ▶ Support of the emergency stop function
- ▶ Support as brake for linear motors

**⚠** Observe the safety instructions on clamping and braking units.

## Characteristic features

- ▶ Clamps and brakes with spring energy accumulator
- ▶ Positive-locking integrated contact profiles ensure maximum axial and horizontal rigidity, and thus an excellent braking effect
- ▶ Dynamic and static stability in axial direction

### Special features MBPS/UBPS:

- ▶ 5 million clamping cycles (B10d value)

## Functional principle

### Air pressure: 0 bar

#### Clamps and brakes with spring force

In the event of a pressure drop, the clamping or braking effect is generated via a dual acting gate valve gear mechanism, each with one spring assembly (spring energy accumulator).

An integrated quick-exhaust valve ensures short response times.



### Air pressure: 4.5 - 8 bar (MBPS)

#### 5.5 - 8 bar (UBPS)

#### Decompression with air pressure

The clamping profiles are held apart by the compressed air.

- ▶ Free movement is possible

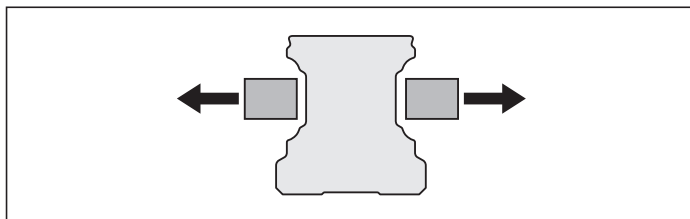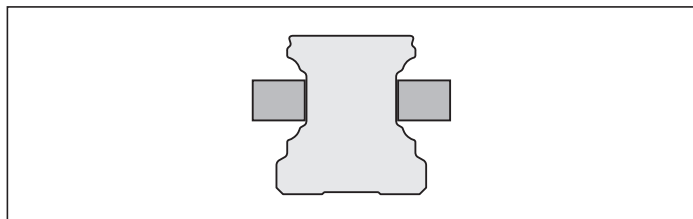

**Further highlights**

- ▶ Up to 1 million clamping cycles
- ▶ Up to 2000 emergency braking operations
- ▶ Integrated all-round sealing
- ▶ High continuous output
- ▶ High positioning accuracy
- ▶ Mechanical gate valve gear mechanism
- ▶ Solid, rigid steel housing, chemically nickel-plated
- ▶ Low air consumption
- ▶ Maintenance-free



**Special features of MBPS:**

- ▶ Clamping and braking units in short format
- ▶ Add-ons with three pistons connected in series combined with strong springs result in holding forces up to 3,800 N at just 4.5 bar release pressure.
- ▶ 5 million clamping cycles (B10d value)<sup>1)</sup>


**Special features of UBPS:**

- ▶ Very high axial holding forces of up to 7700 N at 5.5 bar release pressure with high-power spring energy accumulator
- ▶ Increased holding force of up to 9200 N thanks to additional pressurization on the air-plus port
- ▶ Extremely low air consumption
- ▶ Compact version, compatible with DIN 645
- ▶ 5 million clamping cycles (B10d value)<sup>1)</sup>

1) B10d value is not achieved on air-plus port

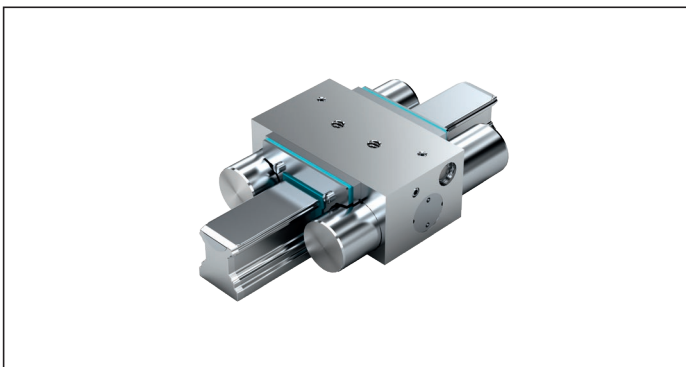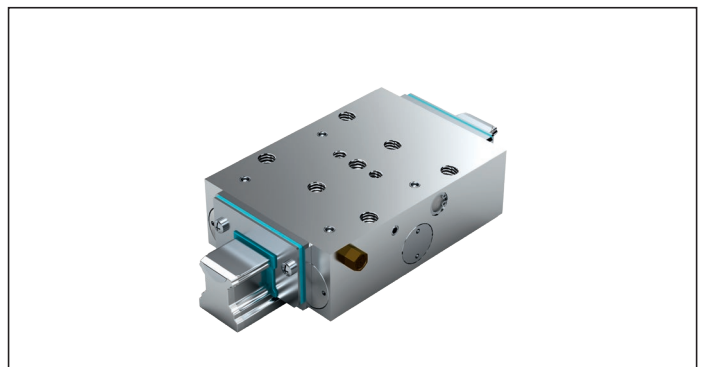**MBPS****UBPS**

# Pneumatic clamping and braking units MBPS<sup>1)</sup>

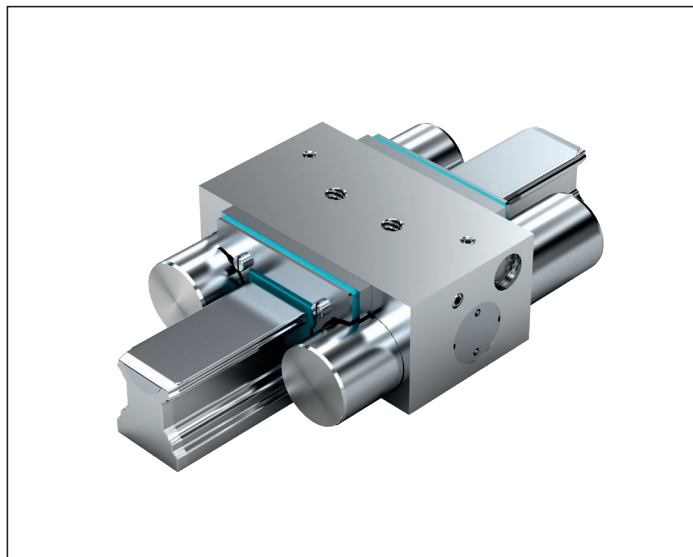

## R1619 .40 31

### Note

Can be used on all SNS ball guide rails.


### Clamps and brakes without pressurization (spring energy)

- ▶ Minimum release pressure 4.5 bar
- ▶ Maximum pneumatic operating pressure: 8 bar
- ▶ Operating temperature range t: 0 – 70°C

### Instruction for mounting

- ▶ Make sure the connection structure is rigid.
- ▶ Use only purified and lubricated air. The prescribed filter mesh size is 25 µm.
- ▶ Observe the mounting instructions prior to commissioning.
- ▶ Check whether the sealing lips of the front seals are resting evenly on the ball guide rail. Realign if required.

### Circuitry<sup>2)</sup> for standard air port

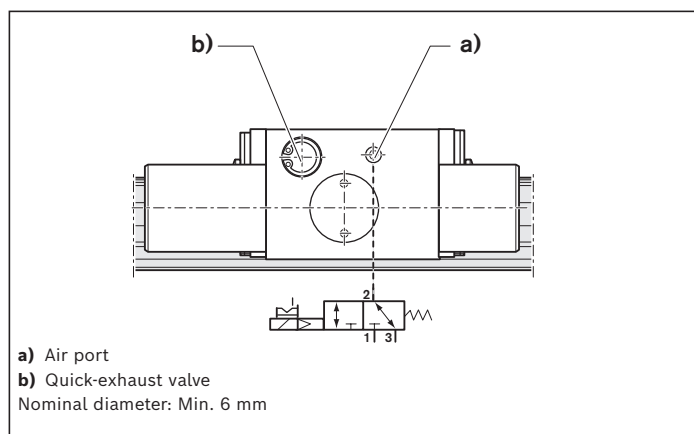


- ⚠ Observe the safety instructions on clamping and braking units.

| Size | Material number | Holding force<br>Spring energy <sup>2)</sup><br>(N) | Air consumption (normal liter)<br>Air port<br>(dm <sup>3</sup> /stroke) |
|------|-----------------|-----------------------------------------------------|-------------------------------------------------------------------------|
| 20   | R1619 840 31    | 1 000                                               | 0.034                                                                   |
| 25   | R1619 240 31    | 1 300                                               | 0.048                                                                   |
| 30   | R1619 740 31    | 2 000                                               | 0.065                                                                   |
| 35   | R1619 340 31    | 2 600                                               | 0.093                                                                   |
| 45   | R1619 440 31    | 3 600                                               | 0.099                                                                   |
| 55   | R1619 540 31    | 4 700                                               | 0.244                                                                   |
| 65   | R1619 640 31    | 4 700                                               | 0.244                                                                   |

<sup>1)</sup> Zimmer GmbH


<sup>2)</sup> Holding force by spring energy at 6 bar. The inspection is done in a mounted state with a lubricated layer (ISO-VG 68)

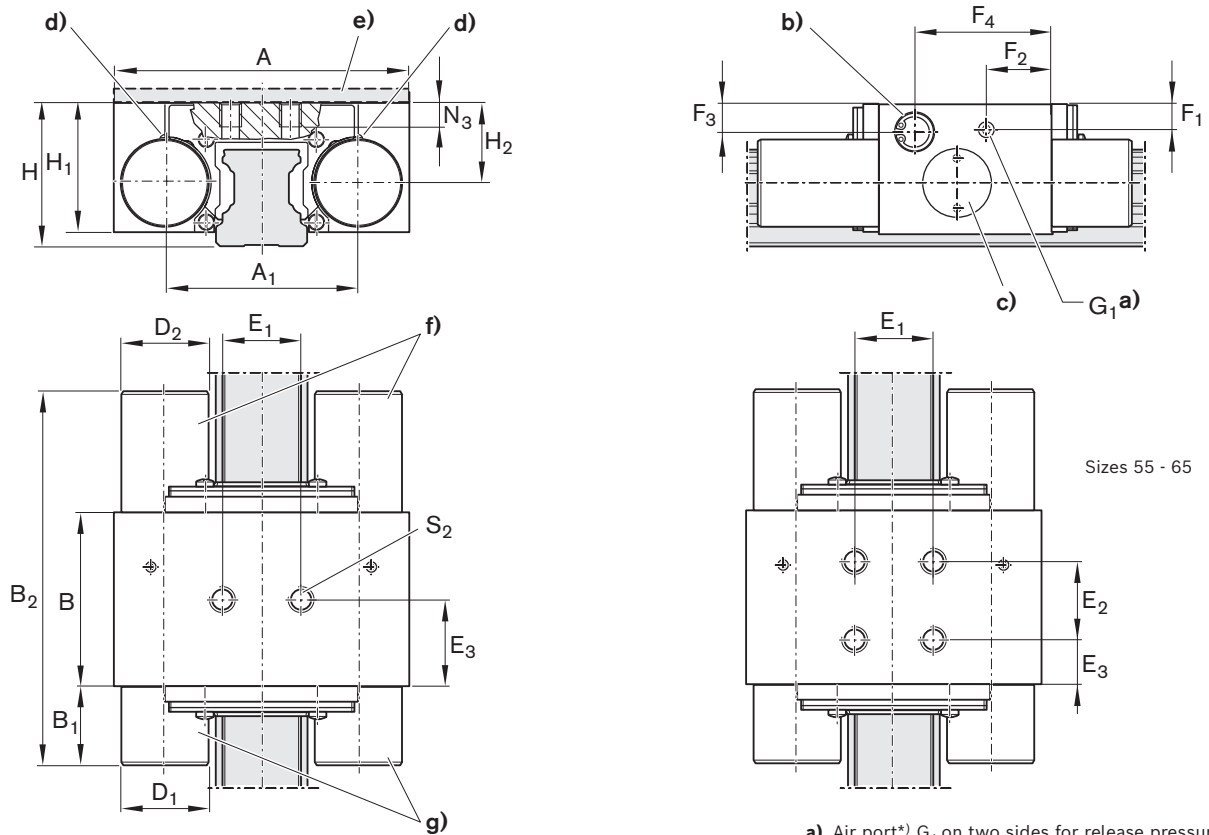**MBPS**

| Size      | Dimensions (mm) |                |    |                |                    |                |                |                |                |                |                |                |                |                |                |    |                              |                |                |                | Mass (kg) |
|-----------|-----------------|----------------|----|----------------|--------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----|------------------------------|----------------|----------------|----------------|-----------|
|           | A               | A <sub>1</sub> | B  | B <sub>1</sub> | B <sub>2 max</sub> | D <sub>1</sub> | D <sub>2</sub> | E <sub>1</sub> | E <sub>2</sub> | E <sub>3</sub> | F <sub>1</sub> | F <sub>2</sub> | F <sub>3</sub> | F <sub>4</sub> | G <sub>1</sub> | H  | H <sub>1</sub> <sup>1)</sup> | H <sub>2</sub> | N <sub>3</sub> | S <sub>2</sub> |           |
| <b>20</b> | 66              | 45.7           | 44 | 19.0           | 94.5               | 16             | 18             | 20             | -              | 22.0           | 5.5            | 15.5           | 6.0            | 35.5           | M5             | 30 | 25.8                         | 16.2           | 8.6            | M6             | 0.7       |
| <b>25</b> | 75              | 49.0           | 44 | 21.0           | 93.9               | 22             | 22             | 20             | -              | 21.0           | 6.5            | 16.5           | 7.0            | 34.7           | M5             | 36 | 32.5                         | 20.0           | 8.0            | M6             | 1.0       |
| <b>30</b> | 90              | 58.0           | 47 | 29.0           | 107.5              | 25             | 25             | 22             | -              | 23.0           | 7.2            | 30.5           | 7.2            | 40.0           | M5             | 42 | 38.5                         | 24.0           | 9.0            | M8             | 1.8       |
| <b>35</b> | 100             | 68.0           | 46 | 27.7           | 106.2              | 28             | 28             | 24             | -              | 24.5           | 9.0            | 19.0           | 9.5            | 38.0           | G1/8"          | 48 | 42.0                         | 26.5           | 10.0           | M8             | 1.9       |
| <b>45</b> | 120             | 78.8           | 49 | 32.2           | 113.7              | 30             | 30             | 26             | -              | 24.5           | 15.0           | 31.1           | 12.2           | 41.6           | G1/8"          | 60 | 52.0                         | 35.5           | 15.0           | M10            | 2.3       |
| <b>55</b> | 140             | 97.0           | 62 | 41.0           | 144.5              | 39             | 39             | 38             | 38             | 12.0           | 11.0           | 23.0           | 11.0           | 40.0           | M5             | 70 | 59.0                         | 38.0           | 18.0           | M10            | 3.7       |
| <b>65</b> | 150             | 106.0          | 62 | 41.0           | 145.0              | 39             | 38             | 38             | 38             | 12.0           | 16.0           | 23.0           | 16.0           | 40.0           | M5             | 90 | 75.5                         | 53.5           | 18.0           | M10            | 4.2       |

1) Ball runner block .H. (...High...) Spacer plate necessary.

# Pneumatic clamping and braking units UBPS<sup>1)</sup>

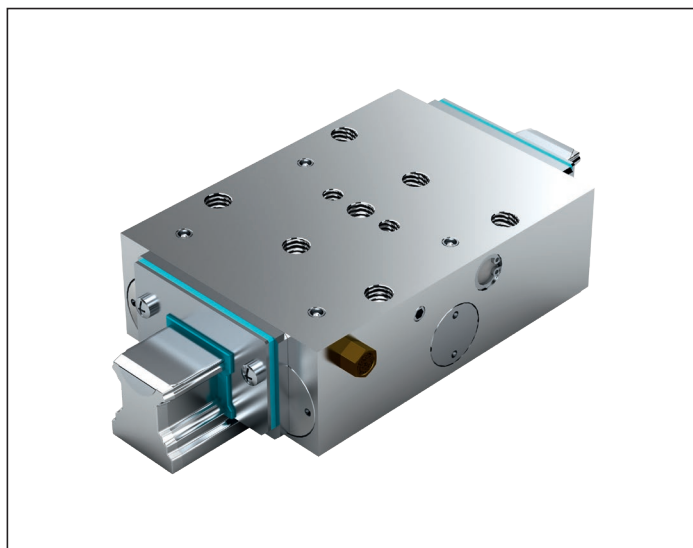

## R1619 .40 51

**Very high axial holding forces due to three pistons connected in series combined with strong spring energy accumulator; increased holding force thanks to additional pressure through the air-plus port.**

### Note

Can be used on all SNS ball guide rails.

### Clamps and brakes without pressurization (spring energy)


- ▶ Minimum release pressure 5.5 bar
- ▶ Maximum pneumatic operating pressure: 8 bar
- ▶ Operating temperature range t: 0 - 70 °C

### Instruction for mounting

- ▶ Stop surfaces can be used on two sides.
- ▶ Make sure the connection structure is rigid.
- ▶ Use only purified and lubricated air. The prescribed filter mesh size is 25 µm.
- ▶ Observe the mounting instructions prior to commissioning.
- ▶ Check whether the sealing lips of the front seals are resting evenly on the ball guide rail. Realign if required.


**⚠** Observe the safety instructions on clamping and braking units.

### Circuitry<sup>2)</sup> for standard air port



- a) Air port  
b) Air filter  
Nominal diameter: Min. 6 mm

### Circuitry<sup>3)</sup> for air-plus port




- a) Air port  
b) Air-plus port  
Nominal diameter: Min. 6 mm

| Size | Material number | Holding force<br>Spring energy <sup>2)</sup><br>(N) | with air-plus port <sup>3)</sup><br>(N) | Air consumption (normal liter)        |                                            |
|------|-----------------|-----------------------------------------------------|-----------------------------------------|---------------------------------------|--------------------------------------------|
|      |                 |                                                     |                                         | Air port<br>(dm <sup>3</sup> /stroke) | Air-plus port<br>(dm <sup>3</sup> /stroke) |
| 25   | R1619 240 51    | 1 500                                               | 2 650                                   | 0.080                                 | 0.165                                      |
| 30   | R1619 740 51    | 2 500                                               | 3 300                                   | 0.111                                 | 0.274                                      |
| 35   | R1619 340 51    | 2 800                                               | 3 800                                   | 0.139                                 | 0.303                                      |
| 45   | R1619 440 51    | 5 200                                               | 7 600                                   | 0.153                                 | 0.483                                      |
| 55   | R1619 540 51    | 7 700                                               | 9 200                                   | 0.554                                 | 0.952                                      |

1) Zimmer GmbH

2) Holding force achieved by spring energy. The inspection is done in a mounted state with a lubricated layer (ISO-VG 68).

3) Increased holding force by additional air admission at air-plus port with 6.0 bar. Switching via 5/2 or 5/3-way directional control valve.

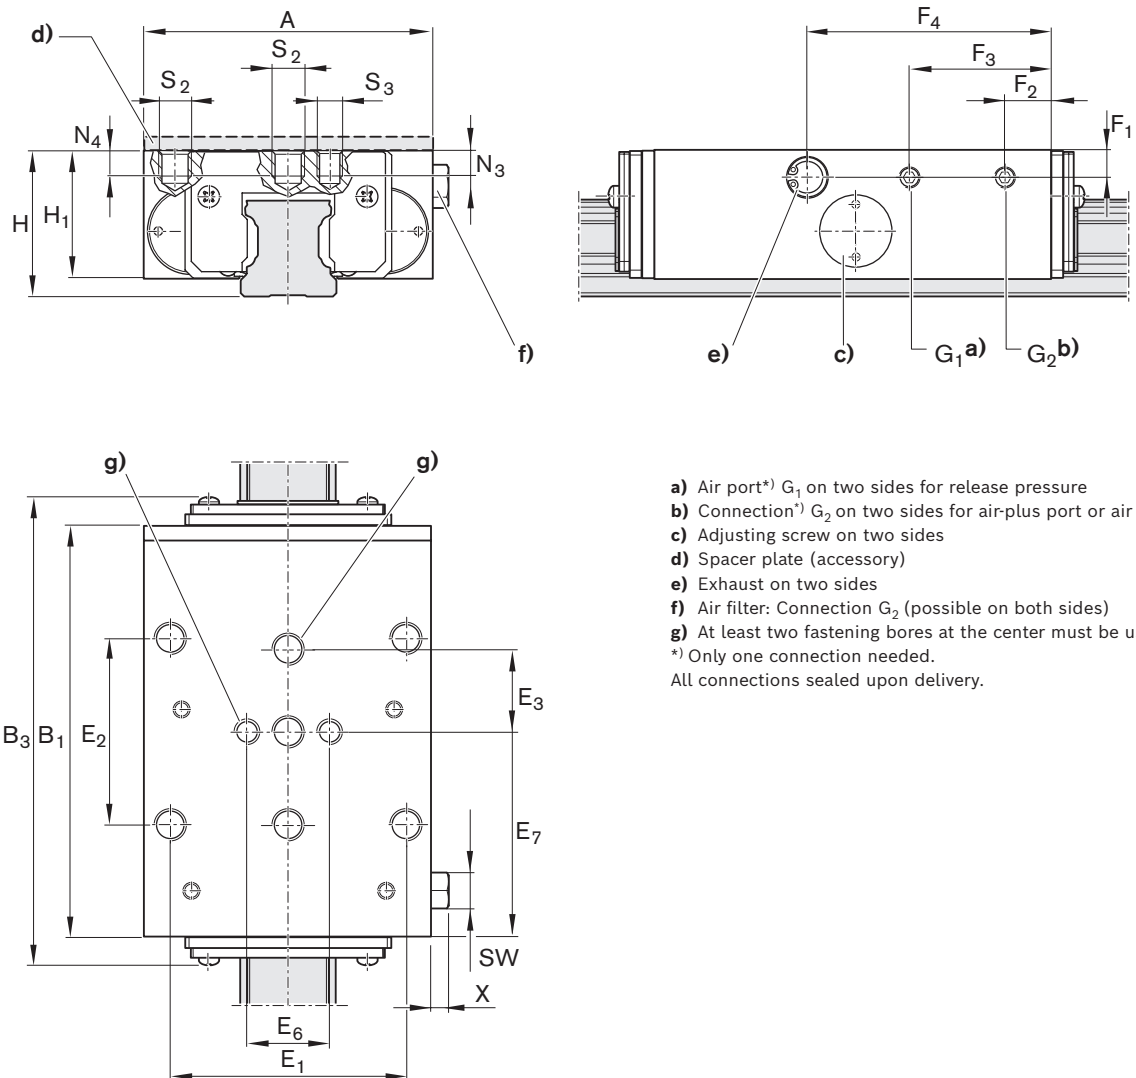**UBPS**

- a) Air port\*) G<sub>1</sub> on two sides for release pressure
  - b) Connection\*) G<sub>2</sub> on two sides for air-plus port or air filter
  - c) Adjusting screw on two sides
  - d) Spacer plate (accessory)
  - e) Exhaust on two sides
  - f) Air filter: Connection G<sub>2</sub> (possible on both sides)
  - g) At least two fastening bores at the center must be used!
- \*) Only one connection needed.  
All connections sealed upon delivery.

| Size | Dimensions (mm) |                |                    |                |                |                |                |                |                |                |                |                |
|------|-----------------|----------------|--------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
|      | A               | B <sub>1</sub> | B <sub>3 max</sub> | E <sub>1</sub> | E <sub>2</sub> | E <sub>3</sub> | E <sub>6</sub> | E <sub>7</sub> | F <sub>1</sub> | F <sub>2</sub> | F <sub>3</sub> | F <sub>4</sub> |
| 25   | 70              | 99             | 115.1              | 57             | 45             | 20             | 20             | 49.5           | 6.5            | 11             | 34.3           | 59.0           |
| 30   | 90              | 109            | 128.7              | 72             | 52             | 22             | 22             | 54.5           | 6.5            | 11             | 40.8           | 66.5           |
| 35   | 100             | 109            | 131.0              | 82             | 62             | 26             | 24             | 54.5           | 8.0            | 11             | 40.8           | 66.5           |
| 45   | 120             | 197            | 220.1              | 100            | 80             | 30             | -              | 98.5           | 12             | 32             | 167            | 106.5          |
| 55   | 140             | 197            | 221.6              | 116            | 95             | 35             | -              | 98.5           | 13             | 32             | 165            | 103.5          |

| Size | Dimensions (mm) |                |    |                              |                |                |                |                |     |           | Mass (kg) |
|------|-----------------|----------------|----|------------------------------|----------------|----------------|----------------|----------------|-----|-----------|-----------|
|      | G <sub>1</sub>  | G <sub>2</sub> | H  | H <sub>1</sub> <sup>1)</sup> | N <sub>3</sub> | N <sub>4</sub> | S <sub>2</sub> | S <sub>3</sub> | X   | SW        |           |
| 25   | M5              | M5             | 36 | 31                           | 7              | 7              | M8             | M6             | 5.5 | Ø8, SW7   | 1.20      |
| 30   | M5              | M5             | 42 | 37                           | 8              | 8              | M10            | M8             | 5.5 | Ø8, SW7   | 1.80      |
| 35   | G1/8"           | G1/8"          | 48 | 42                           | 10             | 10             | M10            | M8             | 6.5 | Ø15, SW13 | 2.25      |
| 45   | G1/8"           | G1/8"          | 60 | 52                           | -              | 12             | M12            | -              | 6.5 | Ø15, SW13 | 6.20      |
| 55   | G1/8"           | G1/8"          | 70 | 60                           | -              | 14             | M14            | -              | 6.5 | Ø15, SW13 | 9.40      |

1) Ball runner block .H. (...High...) Spacer plate required. Available on request.

# Product description pneumatic clamping units

## Application areas

- ▶ Pneumatic clamping of machine axes
- ▶ Table crossbars in the timber industry
- ▶ Positioning of lifting gear

## Characteristic features

- ▶ High axial holding forces with short format
- ▶ Dynamic and static stability in axial direction
- ▶ Simple mechanical gripping principle in LCP and LCPS with good price/performance ratio

## Further highlights

- ▶ Easy mounting
- ▶ Chemically nickel-plated steel housing
- ▶ High axial and horizontal rigidity
- ▶ Precise positioning

**⚠** Observe the safety instructions on clamping and braking units.

## Special features of MK:

- ▶ Clamps with compression (pneumatic). The clamping profiles are pressed by compressed air onto the web surfaces of the ball guide rail via a dual acting gate valve gear mechanism.
- ▶ Continuously adjustable pressure from 4 - 8 bar
- ▶ Decompression with spring force. A preloaded return spring allows for short decompression cycles.
- ▶ 5 million clamping cycles (B10d value)

## Special features of MKS:

- ▶ Clamps without pressurization (spring energy). In the event of a pressure drop, it clamps via the dual-action gate valve gear mechanism with two spring assemblies.
- ▶ An integrated quick-exhaust valve ensures short response times.
- ▶ Higher holding force due to the air-plus port
- ▶ Pneumatic decompression Release pressure 5.5 - 8 bar
- ▶ 5 million clamping cycles (B10d value) \*)

## Special features of LCP:


- ▶ Clamps with compression (pneumatic) by means of mechanical gripping
- ▶ Continuously adjustable pressure from 5.5 - 8 bar
- ▶ Short decompression cycles
- ▶ Decompression with spring force. A preloaded return spring allows for short decompression cycles.

## Special features of LCPS:

- ▶ Clamps without pressurization (with spring energy) by means of mechanical gripping with a spring assembly (spring energy accumulator)
- ▶ Release pressure 5.5 - 8 bar (pneumatic)
- ▶ Higher holding force due to the air-plus port
- ▶ Decompression with air pressure.


\*) with the air-plus port, the B10d value cannot be achieved.

## Functional principle

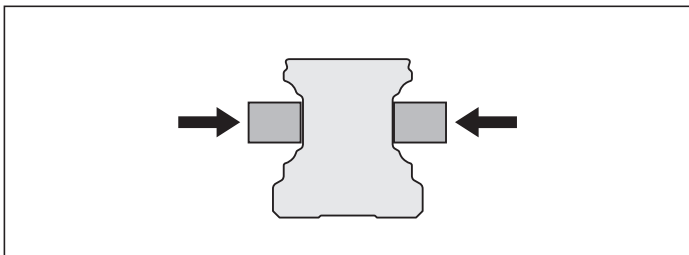

### Clamping with air pressure or spring force

- ▶ The clamping profiles are pressed to the web surfaces of the ball guide rail.

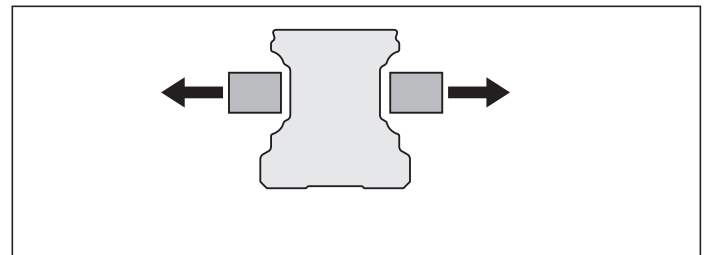


### Decompression with air pressure or spring force

- ▶ The clamping profiles are held apart.
- ▶ Free movement is possible




## Model overview of accessories for pneumatic clamping units


**MK**

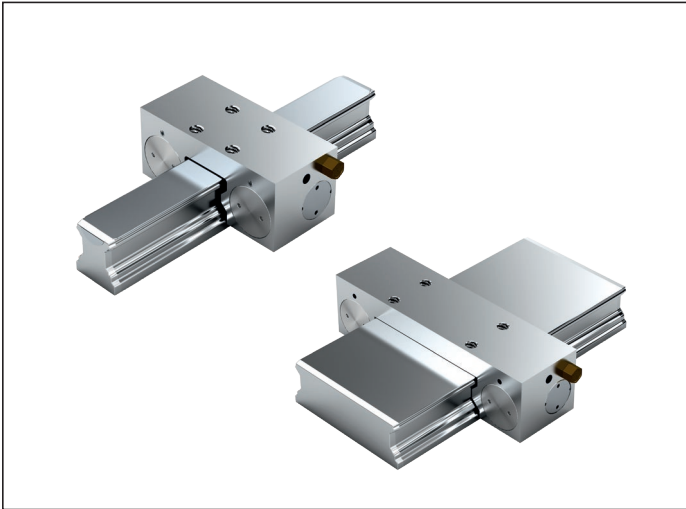


**MKS**

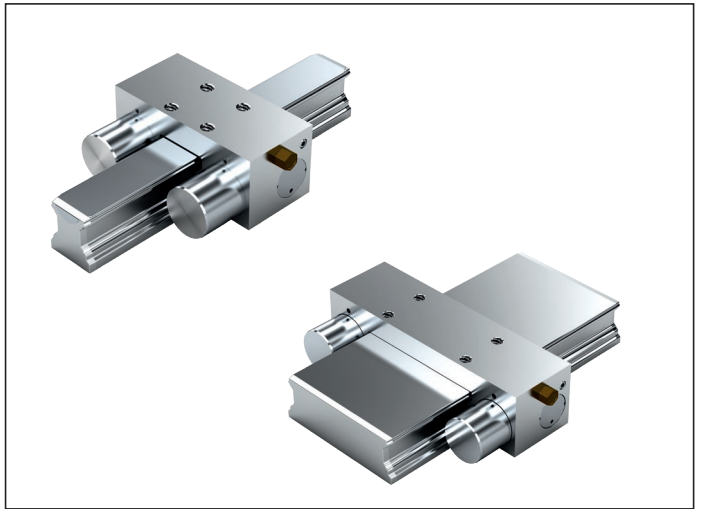


**LCP**

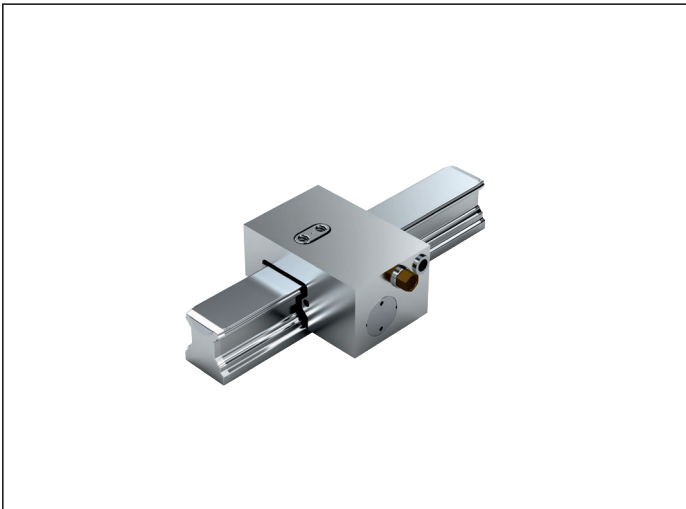

**LCPS**

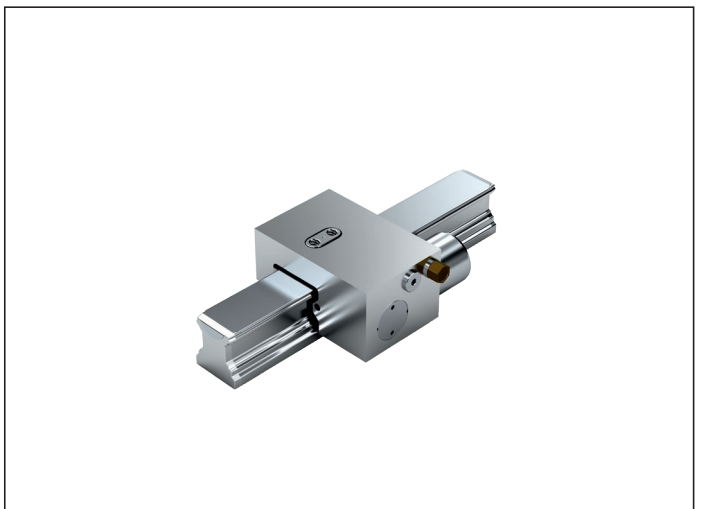

# Pneumatic clamping units MK<sup>1)</sup>

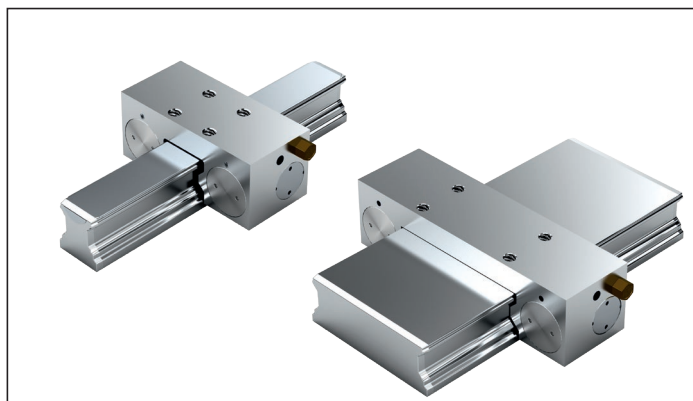

## R1619 .42 60

### Note

Can be used on all SNS ball guide rails.

## R1619 .42 62


### Note

Can be used on all ball guide rails BNS.

### Clamps with compression

- ▶ Maximum pneumatic operating pressure: 8 bar
- ▶ Operating temperature range t: 0 – 70°C

### Circuit type<sup>2)</sup> for standard air port

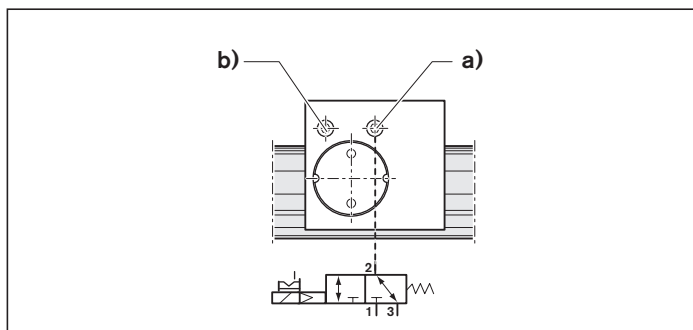

a) Air port

b) Air filter

Nominal diameter:

Sizes 15 - 20: min. 4 mm

Sizes 25 - 65: min. 6 mm

### Instruction for mounting


- ▶ Make sure the connection structure is rigid.
- ▶ Use only purified and lubricated air. The prescribed filter mesh size is 25 µm.
- ▶ Observe the mounting instructions prior to commissioning.

⚠ Observe the safety instructions on clamping and braking units.

| Size  | Material number | Holding force<br>pneumatic <sup>2)</sup><br>(N) | Air consumption (normal liter)<br>Air port<br>(dm <sup>3</sup> /stroke) |
|-------|-----------------|-------------------------------------------------|-------------------------------------------------------------------------|
| 15    | R1619 142 60    | 650                                             | 0.011                                                                   |
| 20    | R1619 842 60    | 1 000                                           | 0.019                                                                   |
| 25    | R1619 242 60    | 1 200                                           | 0.021                                                                   |
| 30    | R1619 742 60    | 1 750                                           | 0.031                                                                   |
| 35    | R1619 342 60    | 2 000                                           | 0.031                                                                   |
| 45    | R1619 442 60    | 2 250                                           | 0.041                                                                   |
| 55    | R1619 542 60    | 2 250                                           | 0.041                                                                   |
| 65    | R1619 642 60    | 2 250                                           | 0.041                                                                   |
| 20/40 | R1619 842 62    | 650                                             | 0.019                                                                   |
| 25/70 | R1619 242 62    | 1 200                                           | 0.021                                                                   |
| 35/90 | R1619 342 62    | 2 000                                           | 0.031                                                                   |

1) Zimmer GmbH


2) Holding force at 6 bar. The inspection is done in a mounted state with a lubricated layer (ISO-VG 68).

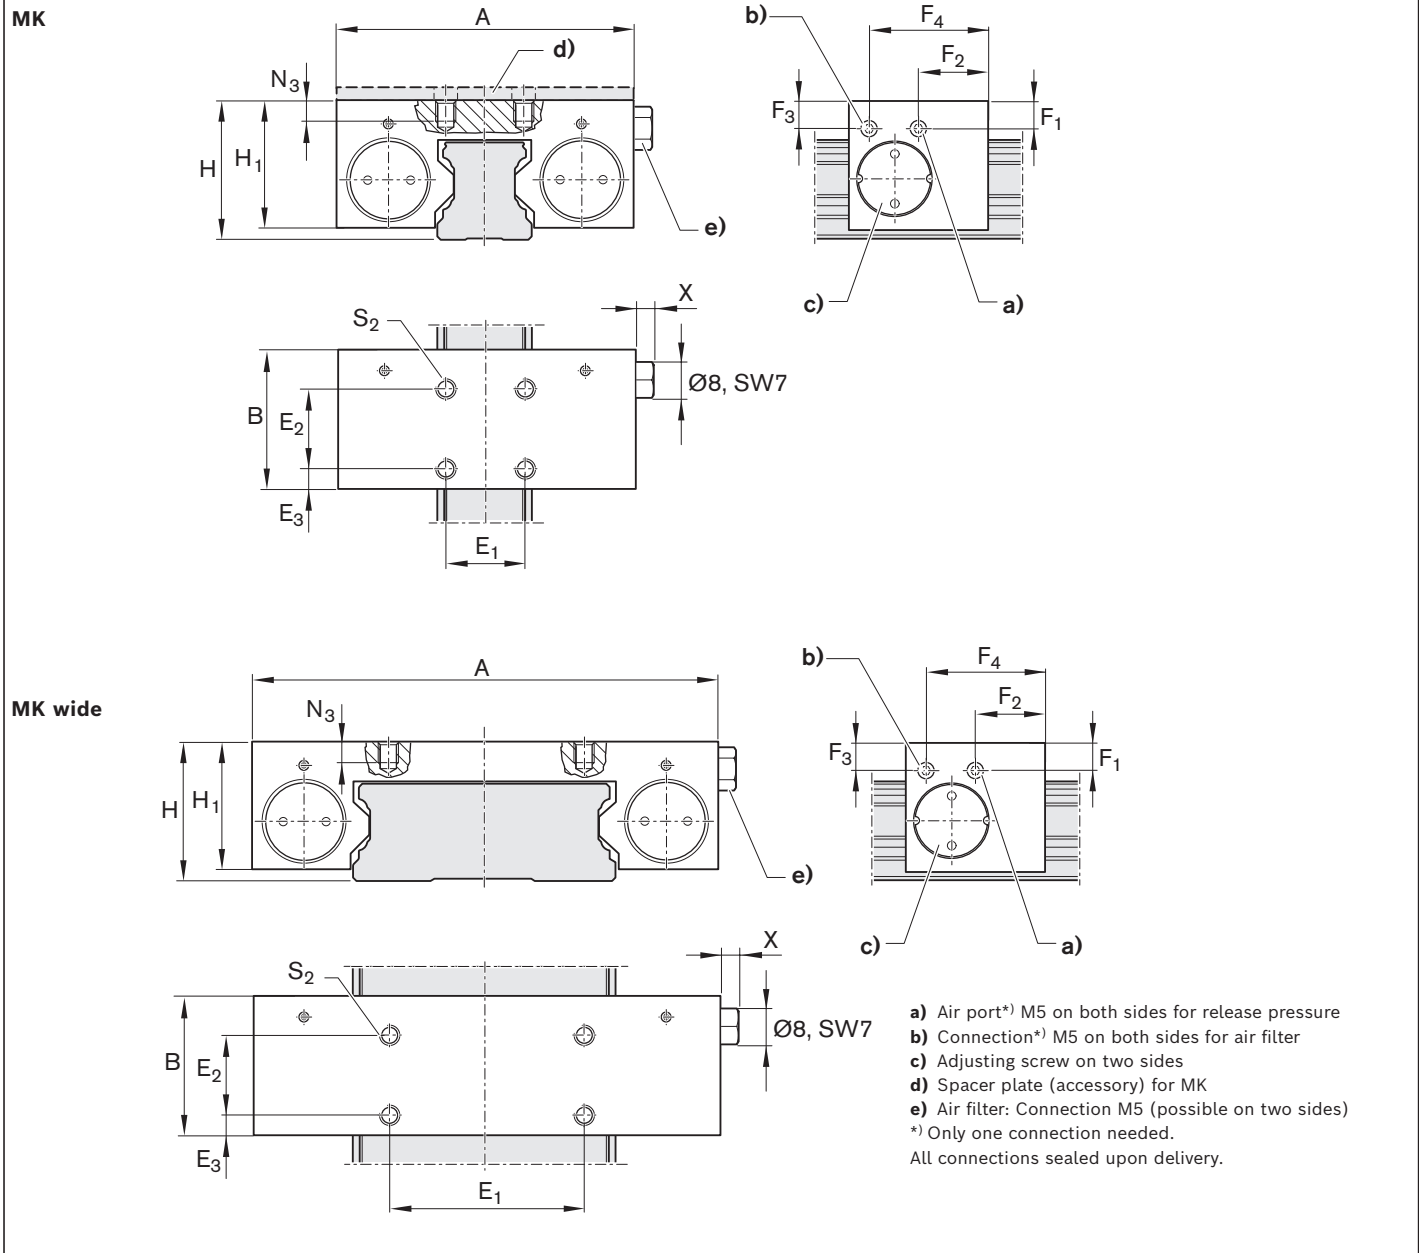

| Size         | Dimensions (mm) |    |                |                |                |                |                |                |                |    |                              |                |                |     | Mass<br>(kg) |
|--------------|-----------------|----|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----|------------------------------|----------------|----------------|-----|--------------|
|              | A               | B  | E <sub>1</sub> | E <sub>2</sub> | E <sub>3</sub> | F <sub>1</sub> | F <sub>2</sub> | F <sub>3</sub> | F <sub>4</sub> | H  | H <sub>1</sub> <sup>1)</sup> | N <sub>3</sub> | S <sub>2</sub> | X   |              |
| <b>15</b>    | 55              | 39 | 15             | 15             | 15.5           | 5.6            | 34.0           | 16.1           | 34.0           | 24 | 20.8                         | 4.5            | M4             | 6.5 | 0.25         |
| <b>20</b>    | 66              | 39 | 20             | 20             | 9.0            | 4.5            | 17.3           | 6.0            | 34.5           | 30 | 27.0                         | 6.0            | M6             | 5.5 | 0.36         |
| <b>25</b>    | 75              | 35 | 20             | 20             | 5.0            | 7.0            | 17.5           | 7.0            | 30.0           | 36 | 32.5                         | 8.0            | M6             | 5.5 | 0.45         |
| <b>30</b>    | 90              | 39 | 22             | 22             | 8.5            | 8.5            | 15.0           | 10.3           | 24.5           | 42 | 38.5                         | 9.0            | M8             | 5.5 | 0.72         |
| <b>35</b>    | 100             | 39 | 24             | 24             | 7.5            | 11.0           | 14.5           | 12.0           | 24.5           | 48 | 44.0                         | 10.0           | M8             | 5.5 | 0.88         |
| <b>45</b>    | 120             | 49 | 26             | 26             | 11.5           | 14.5           | 19.5           | 14.5           | 29.5           | 60 | 52.0                         | 15.0           | M10            | 5.5 | 1.70         |
| <b>55</b>    | 128             | 49 | 30             | 30             | 9.5            | 17.0           | 19.5           | 17.0           | 29.5           | 70 | 57.0                         | 15.0           | M10            | 5.5 | 1.95         |
| <b>65</b>    | 138             | 49 | 30             | 30             | 9.5            | 14.5           | 19.5           | 14.5           | 29.5           | 90 | 73.5                         | 20.0           | M10            | 5.5 | 2.68         |
| <b>20/40</b> | 80              | 39 | 20             | 20             | 15.5           | 5.0            | 4.5            | 5.0            | 31.0           | 27 | 23.5                         | 4.5            | M4             | 5.5 | 0.37         |
| <b>25/70</b> | 120             | 35 | 50             | 20             | 5.0            | 7.0            | 17.5           | 9.0            | 30.0           | 35 | 32.5                         | 8.0            | M6             | 5.5 | 0.62         |
| <b>35/90</b> | 156             | 42 | 60             | 20             | 9.5            | 11.5           | 18.0           | 14.0           | 36.5           | 50 | 45.5                         | 10.0           | M10            | 5.5 | 0.88         |

1) Ball runner block .H. (...High...) Spacer plate necessary

# Pneumatic clamping units MKS<sup>1)</sup>

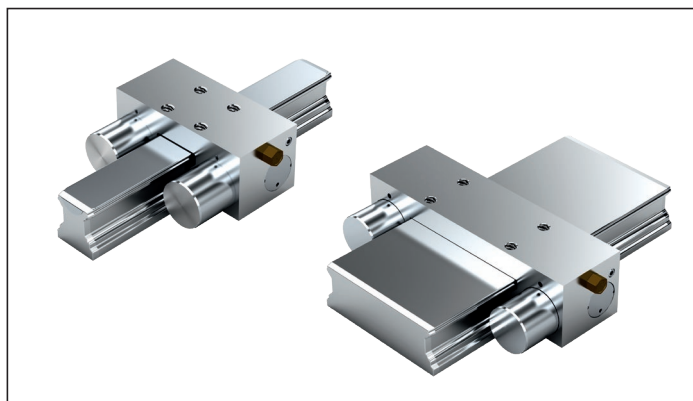

## R1619 .40 60

### Note


Can be used on all SNS ball guide rails.

## R1619 .40 62

### Note


Can be used on all ball guide rails BNS.

### Circuitry<sup>2)</sup> for standard air port



**a)** Air port  
**b)** Air filter  
Nominal diameter:  
Sizes 15 - 20: min. 4 mm  
Sizes 25 - 65: min. 6 mm

### Circuitry<sup>3)</sup> for air-plus port



**a)** Air port  
**b)** Air-plus port  
Nominal diameter:  
Sizes 15 - 20: min. 4 mm  
Sizes 25 - 65: min. 6 mm

### Clamps without pressurization (spring energy)

- ▶ Minimum release pressure 5.5 bar
- ▶ Maximum pneumatic operating pressure: 8 bar
- ▶ Operating temperature range t: 0 – 70°C

### Instruction for mounting

- ▶ Make sure the connection structure is rigid.
- ▶ Use only purified and lubricated air. The prescribed filter mesh size is 25 µm.
- ▶ Observe the mounting instructions prior to commissioning.



**⚠** Observe the safety instructions on clamping and braking units.

| Size         | Material number | Holding force               |                                  | Air consumption (normal liter) |                           |
|--------------|-----------------|-----------------------------|----------------------------------|--------------------------------|---------------------------|
|              |                 | Spring energy <sup>2)</sup> | with air-plus port <sup>3)</sup> | Air port                       | Air-plus port             |
|              |                 | (N)                         | (N)                              | (dm <sup>3</sup> /stroke)      | (dm <sup>3</sup> /stroke) |
| <b>15</b>    | R1619 140 60    | 400                         | 1 050                            | 0.011                          | 0.035                     |
| <b>20</b>    | R1619 840 60    | 600                         | 1 300                            | 0.019                          | 0.063                     |
| <b>25</b>    | R1619 240 60    | 750                         | 1 500                            | 0.021                          | 0.068                     |
| <b>30</b>    | R1619 740 60    | 1 050                       | 2 200                            | 0.031                          | 0.121                     |
| <b>35</b>    | R1619 340 60    | 1 250                       | 2 200                            | 0.031                          | 0.129                     |
| <b>45</b>    | R1619 440 60    | 1 450                       | 3 300                            | 0.041                          | 0.175                     |
| <b>55</b>    | R1619 540 60    | 1 450                       | 3 300                            | 0.041                          | 0.175                     |
| <b>65</b>    | R1619 640 60    | 1 450                       | 3 300                            | 0.041                          | 0.175                     |
| <b>20/40</b> | R1619 840 62    | 400                         | 1 050                            | 0.019                          | 0.063                     |
| <b>25/70</b> | R1619 240 62    | 750                         | 1 950                            | 0.021                          | 0.068                     |
| <b>35/90</b> | R1619 340 62    | 1 250                       | 2 200                            | 0.031                          | 0.129                     |

1) Zimmer GmbH

2) Holding force achieved by spring energy. The inspection is done in a mounted state with a lubricated layer (ISO-VG 68).

3) Increased holding force by additional air admission at air-plus port with 6.0 bar. Switching via 5/2 or 5/3-way directional control valve.

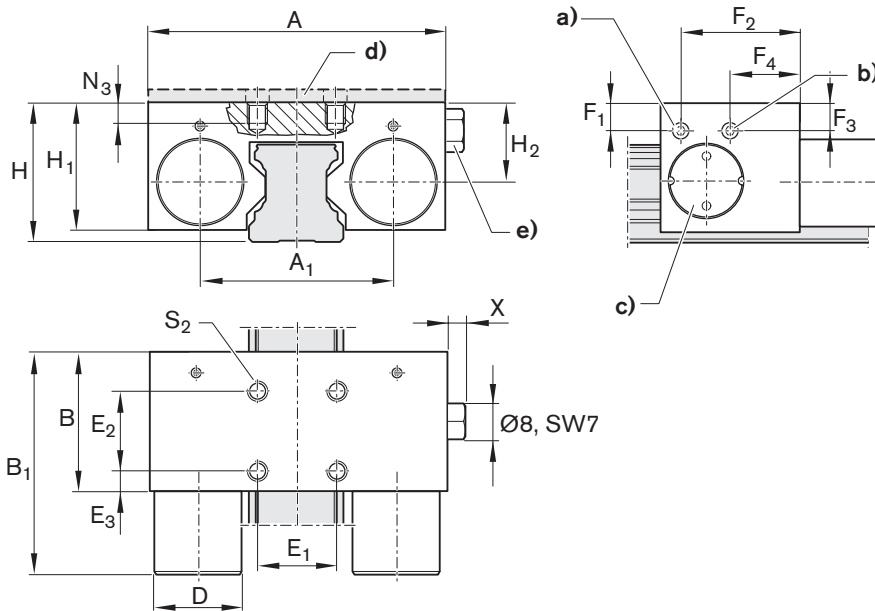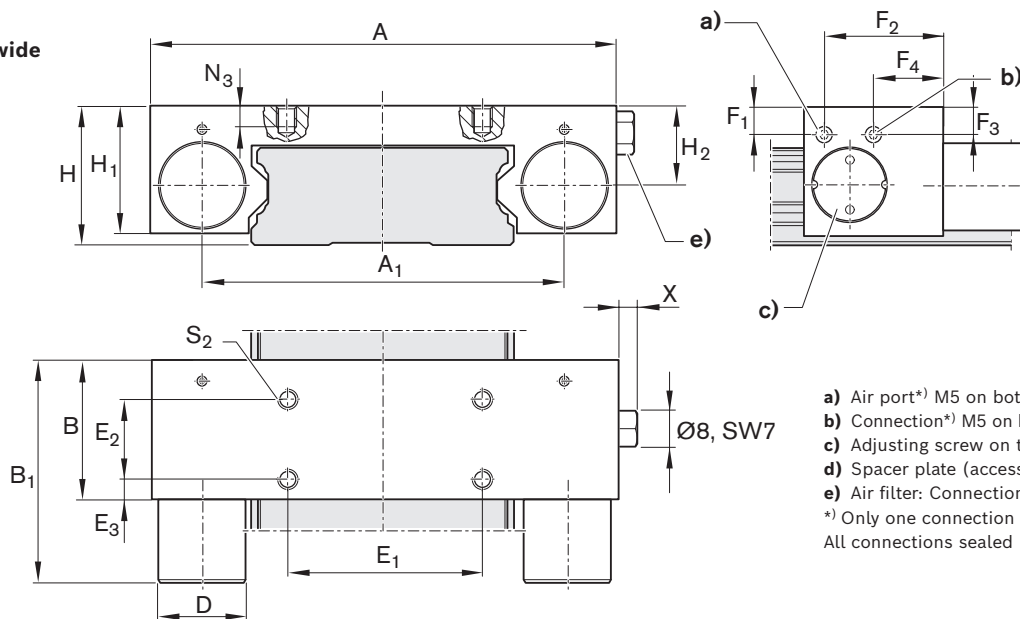**MKS****MKS wide**

- a) Air port\*) M5 on both sides for release pressure  
 b) Connection\*) M5 on both sides for air-plus port or air filter  
 c) Adjusting screw on two sides  
 d) Spacer plate (accessory) for MKS  
 e) Air filter: Connection M5 (possible on two sides)  
 \*) Only one connection needed.  
 All connections sealed upon delivery.

| Size         | Dimensions (mm) |                |    |                    |    |                |                |                |                |                |                |                |    |                              |                |                |                |     | Mass<br>(kg) |
|--------------|-----------------|----------------|----|--------------------|----|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----|------------------------------|----------------|----------------|----------------|-----|--------------|
|              | A               | A <sub>1</sub> | B  | B <sub>1 max</sub> | D  | E <sub>1</sub> | E <sub>2</sub> | E <sub>3</sub> | F <sub>1</sub> | F <sub>2</sub> | F <sub>3</sub> | F <sub>4</sub> | H  | H <sub>1</sub> <sup>1)</sup> | H <sub>2</sub> | N <sub>3</sub> | S <sub>2</sub> | X   |              |
| <b>15</b>    | 55              | 34.0           | 39 | 58.5               | 16 | 15             | 15             | 15.5           | 16.1           | 34.0           | 5.6            | 34.0           | 24 | 20.8                         | 11.6           | 4.5            | M4             | 6.5 | 0.29         |
| <b>20</b>    | 66              | 43.0           | 39 | 61.5               | 20 | 20             | 20             | 9.0            | 6.0            | 34.5           | 4.5            | 17.3           | 30 | 27.0                         | 15.5           | 6.0            | M6             | 5.5 | 0.41         |
| <b>25</b>    | 75              | 49.0           | 35 | 56.5               | 22 | 20             | 20             | 5.0            | 7.0            | 30.0           | 7.0            | 17.5           | 36 | 32.5                         | 20.0           | 8.0            | M6             | 5.5 | 0.50         |
| <b>30</b>    | 90              | 58.0           | 39 | 68.5               | 25 | 22             | 22             | 8.5            | 10.3           | 24.5           | 8.5            | 15.0           | 42 | 38.5                         | 24.0           | 9.0            | M8             | 5.5 | 0.81         |
| <b>35</b>    | 100             | 68.0           | 39 | 67.5               | 28 | 24             | 24             | 7.5            | 12.0           | 24.5           | 11.0           | 14.5           | 48 | 44.0                         | 28.0           | 10.0           | M8             | 5.5 | 1.00         |
| <b>45</b>    | 120             | 78.8           | 49 | 82.5               | 30 | 26             | 26             | 11.5           | 14.5           | 29.5           | 14.5           | 19.5           | 60 | 52.0                         | 35.5           | 15.0           | M10            | 5.5 | 1.84         |
| <b>55</b>    | 128             | 86.8           | 49 | 82.5               | 30 | 30             | 30             | 9.5            | 17.0           | 29.5           | 17.0           | 19.5           | 70 | 57.0                         | 40.0           | 15.0           | M10            | 5.5 | 2.08         |
| <b>65</b>    | 138             | 96.8           | 49 | 82.5               | 30 | 30             | 30             | 9.5            | 14.5           | 29.5           | 14.5           | 19.5           | 90 | 73.5                         | 55.0           | 20.0           | M10            | 5.5 | 2.86         |
| <b>20/40</b> | 80              | 59.0           | 39 | 58.5               | 16 | 20             | 20             | 15.5           | 5.0            | 31.0           | 5.0            | 4.5            | 27 | 23.5                         | 14.0           | 4.5            | M4             | 5.5 | 0.39         |
| <b>25/70</b> | 120             | 94.0           | 35 | 56.5               | 22 | 50             | 20             | 5.0            | 9.0            | 30.0           | 7.0            | 17.5           | 35 | 32.5                         | 20.0           | 8.0            | M6             | 5.5 | 0.68         |
| <b>35/90</b> | 156             | 124.0          | 42 | 70.5               | 28 | 60             | 20             | 9.5            | 14.0           | 36.5           | 11.5           | 18.0           | 50 | 45.5                         | 30.0           | 10.0           | M10            | 5.5 | 0.89         |

1) Ball runner block .H. (...High...) Spacer plate necessary

Pneumatic clamping units LCP<sup>1)</sup>



R1619 .42 74

Note

Can be used on all SNS ball guide rails.

Clamps with compression


- ▶ Maximum pneumatic operating pressure: 8 bar
- ▶ Operating temperature range t: 0 – 60 °C

Instruction for mounting

- ▶ Make sure the connection structure is rigid.
- ▶ Use only purified and lubricated air. The prescribed filter mesh size is 25 µm.
- ▶ Observe the mounting instructions prior to commissioning.

⚠ Observe the safety instructions on clamping and braking units.

Circuitry<sup>2)</sup> for standard air port

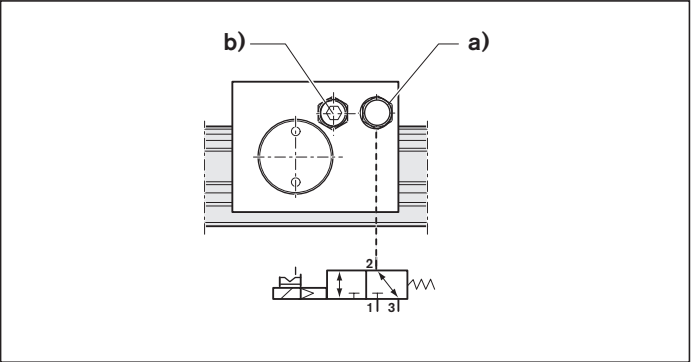


- a) Air port
  - b) Air filter
- Nominal diameter:  
 Sizes 15 - 20: min. 4 mm  
 Sizes 25 - 65: min. 6 mm

| Size | Material number | Holding force pneumatic <sup>2)</sup> (N) | Air consumption (normal liter) Air port (dm³/stroke) |
|------|-----------------|-------------------------------------------|------------------------------------------------------|
| 25   | R1619 242 74    | 850                                       | 0.015                                                |

1) Zimmer GmbH  
2) Holding force at 6 bar. The inspection is done in a mounted state with a lubricated layer (ISO-VG 68).

LCP

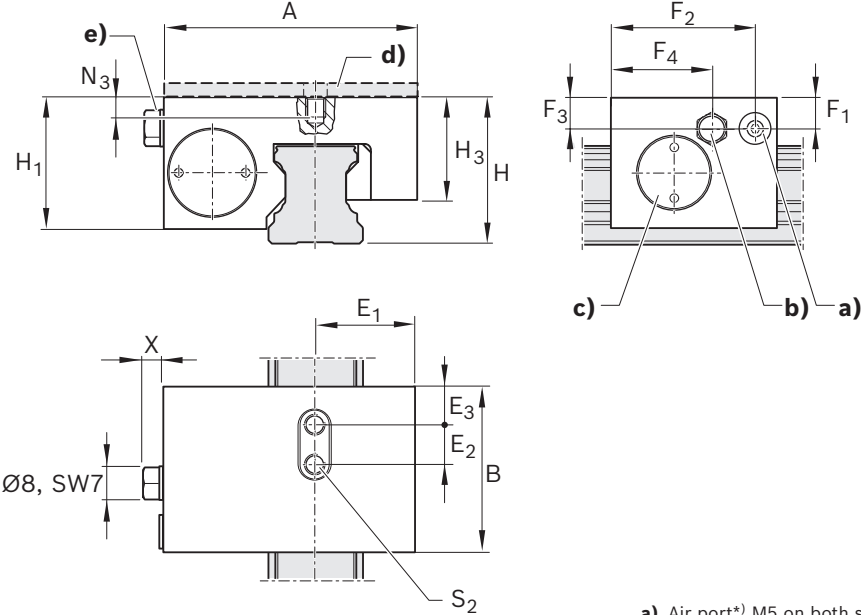


- a) Air port<sup>\*)</sup> M5 on both sides for release pressure
  - b) Connection<sup>\*)</sup> M5 on both sides for air filter
  - c) Adjusting screw on two sides
  - d) Spacer plate (accessory)
  - e) Air filter: Connection M5 (possible on two sides)
- <sup>\*)</sup> Only one connection needed.  
All connections sealed upon delivery.

| Size | Dimensions (mm) |    |                |                |                |                |                |                |                |      |                              |                |                |                |     | Mass<br>(kg) |
|------|-----------------|----|----------------|----------------|----------------|----------------|----------------|----------------|----------------|------|------------------------------|----------------|----------------|----------------|-----|--------------|
|      | A               | B  | E <sub>1</sub> | E <sub>2</sub> | E <sub>3</sub> | F <sub>1</sub> | F <sub>2</sub> | F <sub>3</sub> | F <sub>4</sub> | H    | H <sub>1</sub> <sup>1)</sup> | H <sub>3</sub> | N <sub>3</sub> | S <sub>2</sub> | X   |              |
| 25   | 61.4            | 41 | 23.9           | 9.5            | 9.75           | 6.5            | 36.0           | 6.5            | 24.5           | 36.0 | 32.5                         | 24.55          | 7.7            | M5             | 6.5 | 0.27         |

1) Ball runner block .H. (...High...) Spacer plate necessary.

Pneumatic clamping units LCPS<sup>1)</sup>

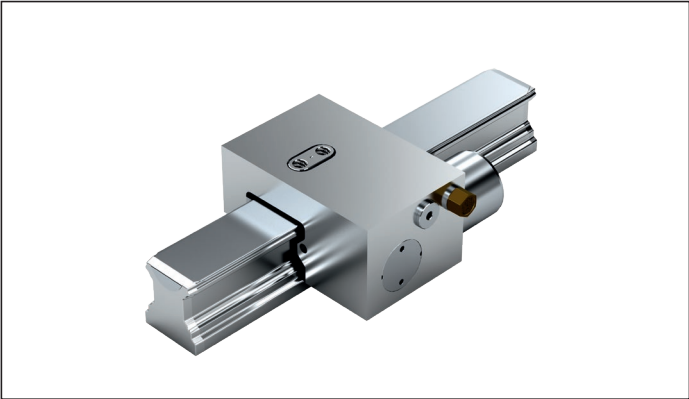

R1619 240 71

Note

Can be used on all SNS ball guide rails.

Clamps without pressurization (spring energy)


- ▶ Release pressure min.: 5.5 bar
- ▶ Maximum pneumatic operating pressure 6.5 bar
- ▶ Operating temperature range t: 0 – 60 °C

Instruction for mounting

- ▶ Make sure the connection structure is rigid.
- ▶ Use only purified and lubricated air. The prescribed filter mesh size is 25 µm.
- ▶ Observe the mounting instructions prior to commissioning.

⚠ Observe the safety instructions on clamping and braking units.

Circuitry<sup>2)</sup> for standard air port




a) Air port  
b) Air filter  
Nominal diameter:  
Size 25: min. 6 mm

| Size | Material number | Holding force | Spring energy <sup>2)</sup> | Air consumption (normal liter) |
|------|-----------------|---------------|-----------------------------|--------------------------------|
|      |                 |               | (N)                         | Air port<br>(dm³/stroke)       |
| 25   | R1619 240 71    |               | 600                         | 0.015                          |

1) Zimmer GmbH  
2) Holding force achieved by spring energy. The inspection is done in a mounted state with a lubricated layer (ISO-VG 68).

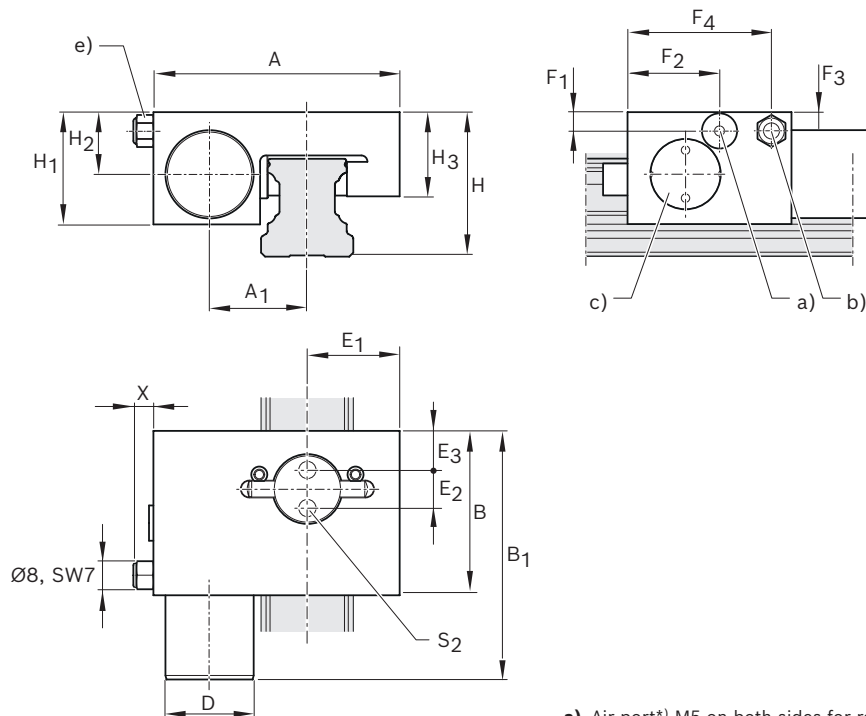

**LCPS**

- a)** Air port\*) M5 on both sides for release pressure  
**b)** Connection\*) M5 on both sides for air filter  
**c)** Adjusting screw on two sides  
**d)** Spacer plate (accessory)  
**e)** Air filter: Connection M5 (possible on two sides)  
 \*) Only one connection needed.  
 All connections sealed upon delivery.

| Size      | Dimensions (mm) |                |    |                   |    |                |                |                |                |                |                |                |    |                              |                |                |                |                |     | Mass<br>(kg) |
|-----------|-----------------|----------------|----|-------------------|----|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----|------------------------------|----------------|----------------|----------------|----------------|-----|--------------|
|           | A               | A <sub>1</sub> | B  | B <sub>1max</sub> | D  | E <sub>1</sub> | E <sub>2</sub> | E <sub>3</sub> | F <sub>1</sub> | F <sub>2</sub> | F <sub>3</sub> | F <sub>4</sub> | H  | H <sub>1</sub> <sup>1)</sup> | H <sub>2</sub> | H <sub>3</sub> | N <sub>3</sub> | S <sub>2</sub> | X   |              |
| <b>25</b> | 61.4            | 24.4           | 41 | 62.5              | 22 | 23             | 9.5            | 9.75           | 4.7            | 23             | 4.7            | 36.0           | 36 | 28                           | 15.5           | 21             | 7              | M5             | 6.5 | 0.37         |

**1)** Ball runner block .H. (...High...) Spacer plate necessary.

## Manual clamping units, product description

### Application areas

- ▶ Table crossbars and MSC slides
- ▶ Width adjustment
- ▶ Stops
- ▶ Positioning on optical devices and measuring tables

### Characteristic features

- ▶ Simple and safe structural design in compact format
- ▶ Manually operated clamping unit without auxiliary power

### Special features of HK:

- ▶ 500000 clamping cycles (B10d value)

### Further highlights

- ▶ Freely adjustable hand lever
- ▶ Symmetrical force application on ball guide rail via floating contact profiles
- ▶ Precise positioning
- ▶ Holding forces up to 2,000 N


### Spacer plate

Suitable for mounting with high ball runner block SNH R1621 and SLH R1624.


⚠ Observe the safety instructions on clamping and braking units.

### Model overview of accessories for manual clamping units, spacer plate


HK

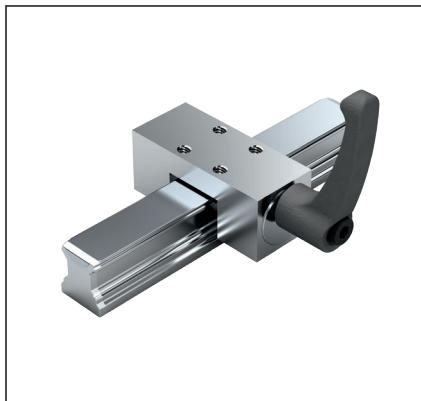

HK

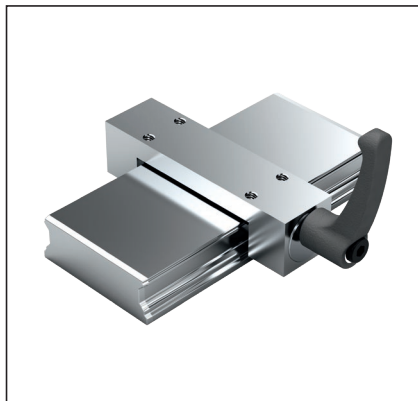


Spacer plate

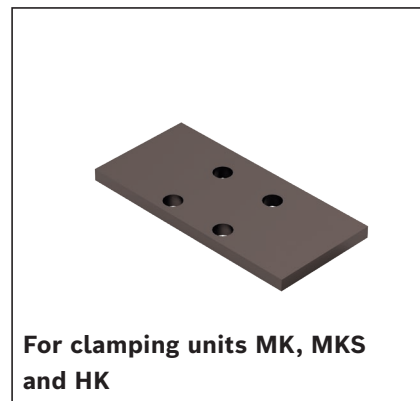


### Clamps with manual compression

The clamping profiles are pressed to the web surfaces of the ball guide rail by the hand lever.


#### Compression via hand lever

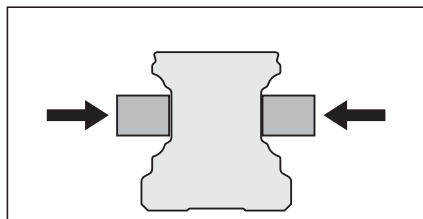

#### Hand lever disengaged

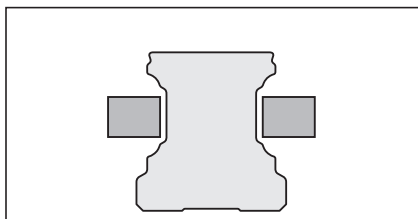

# Manual clamping units HK<sup>1)</sup>

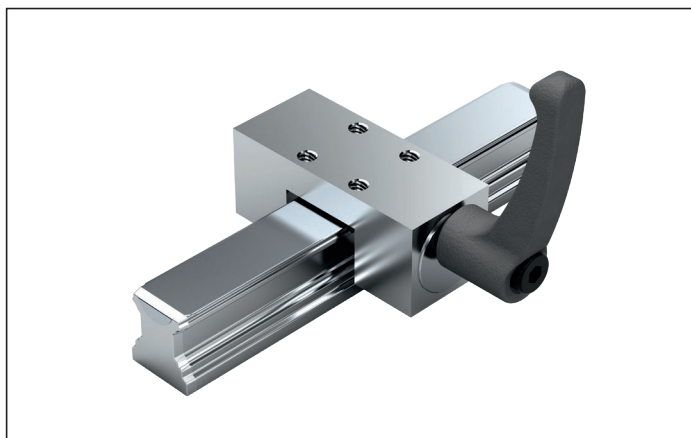

## R1619 .42 82

### Note

Can be used on all SNS ball guide rails.

### Manual Clamping Unit

- Operating temperature range t: 0 – 70°C


### Instruction for mounting

- Make sure the connection structure is rigid.
- Observe the mounting instructions prior to commissioning.


▲ Observe the safety instructions on clamping and braking units.

| Size | Material number | Holding force <sup>2)</sup><br>(N) | Tightening torque<br>(Nm) |
|------|-----------------|------------------------------------|---------------------------|
| 15   | R1619 142 82    | 1 200                              | 4                         |
| 20   | R1619 842 82    | 1 200                              | 5                         |
| 25   | R1619 242 82    | 1 200                              | 7                         |
| 30   | R1619 742 82    | 2 000                              | 15                        |
| 35   | R1619 342 82    | 2 000                              | 15                        |
| 45   | R1619 442 82    | 2 000                              | 15                        |
| 55   | R1619 542 82    | 2 000                              | 22                        |
| 65   | R1619 642 82    | 2 000                              | 22                        |

## HK

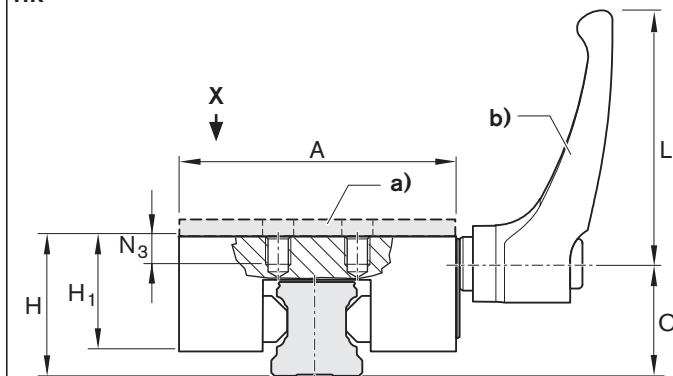

- a) Spacer plate (accessory)  
b) Position of the hand lever can be changed.

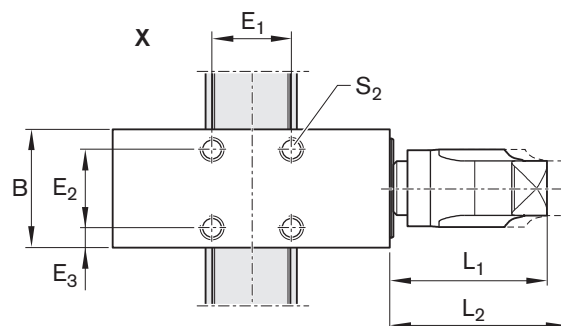

| Size | Dimensions (mm) |    |      |                |                |                |    |                              |    |                |                              |                |                | Mass<br>(kg) |
|------|-----------------|----|------|----------------|----------------|----------------|----|------------------------------|----|----------------|------------------------------|----------------|----------------|--------------|
|      | A               | B  | C    | E <sub>1</sub> | E <sub>2</sub> | E <sub>3</sub> | H  | H <sub>1</sub> <sup>4)</sup> | L  | L <sub>1</sub> | L <sub>2</sub> <sup>3)</sup> | N <sub>3</sub> | S <sub>2</sub> |              |
| 15   | 47              | 25 | 19.0 | 17             | 17             | 4.0            | 24 | 19                           | 44 | 30.0           | 33.0                         | 5              | M4             | 0.16         |
| 20   | 60              | 24 | 24.5 | 15             | 15             | 4.5            | 30 | 23                           | 44 | 30.0           | 33.0                         | 6              | M5             | 0.23         |
| 25   | 70              | 30 | 29.3 | 20             | 20             | 5.0            | 36 | 29                           | 64 | 38.5           | 41.5                         | 7              | M6             | 0.43         |
| 30   | 90              | 39 | 34.0 | 22             | 22             | 8.5            | 42 | 33                           | 78 | 46.5           | 50.5                         | 8              | M6             | 0.82         |
| 35   | 100             | 39 | 38.0 | 24             | 24             | 7.5            | 48 | 41                           | 78 | 46.5           | 50.5                         | 10             | M8             | 1.08         |
| 45   | 120             | 44 | 47.0 | 26             | 26             | 9.0            | 60 | 48                           | 78 | 46.5           | 50.5                         | 14             | M10            | 1.64         |
| 55   | 140             | 49 | 56.5 | 30             | 30             | 9.5            | 70 | 51                           | 95 | 56.5           | 61.5                         | 14             | M14            | 1.71         |
| 65   | 160             | 64 | 69.5 | 35             | 35             | 14.5           | 90 | 66                           | 95 | 56.5           | 61.5                         | 20             | M16            | 2.84         |


1) Zimmer GmbH

2) The inspection is done in a mounted state with a lubricated layer (ISO-VG 68).

3) Hand lever disengaged

4) Ball runner block .H. (...High...) Spacer plate necessary

Manual clamping units HK<sup>1)</sup>

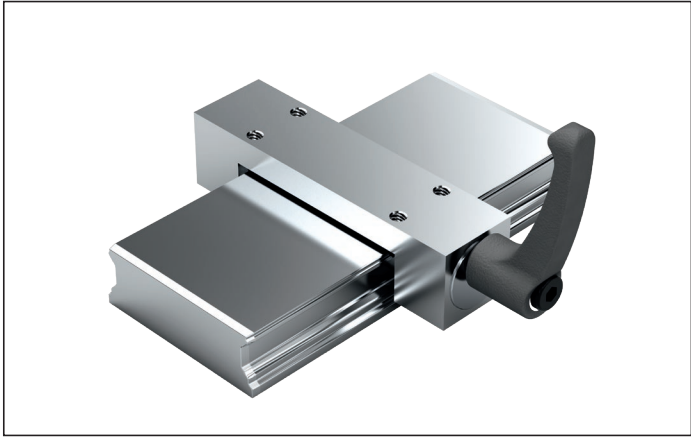

R1619 .42 83

Note

Can be used on all ball guide rails BNS.

Manual Clamping Unit


- ▶ Operating temperature range t: 0 – 70°C

Instruction for mounting

- ▶ Make sure the connection structure is rigid.
- ▶ Observe the mounting instructions prior to commissioning.

⚠ Observe the safety instructions on clamping and braking units.


| Size  | Material number | Holding force <sup>2)</sup><br>(N) | Tightening torque<br>(Nm) |
|-------|-----------------|------------------------------------|---------------------------|
| 25/70 | R1619 242 83    | 1 200                              | 7                         |
| 35/90 | R1619 342 83    | 2 000                              | 15                        |

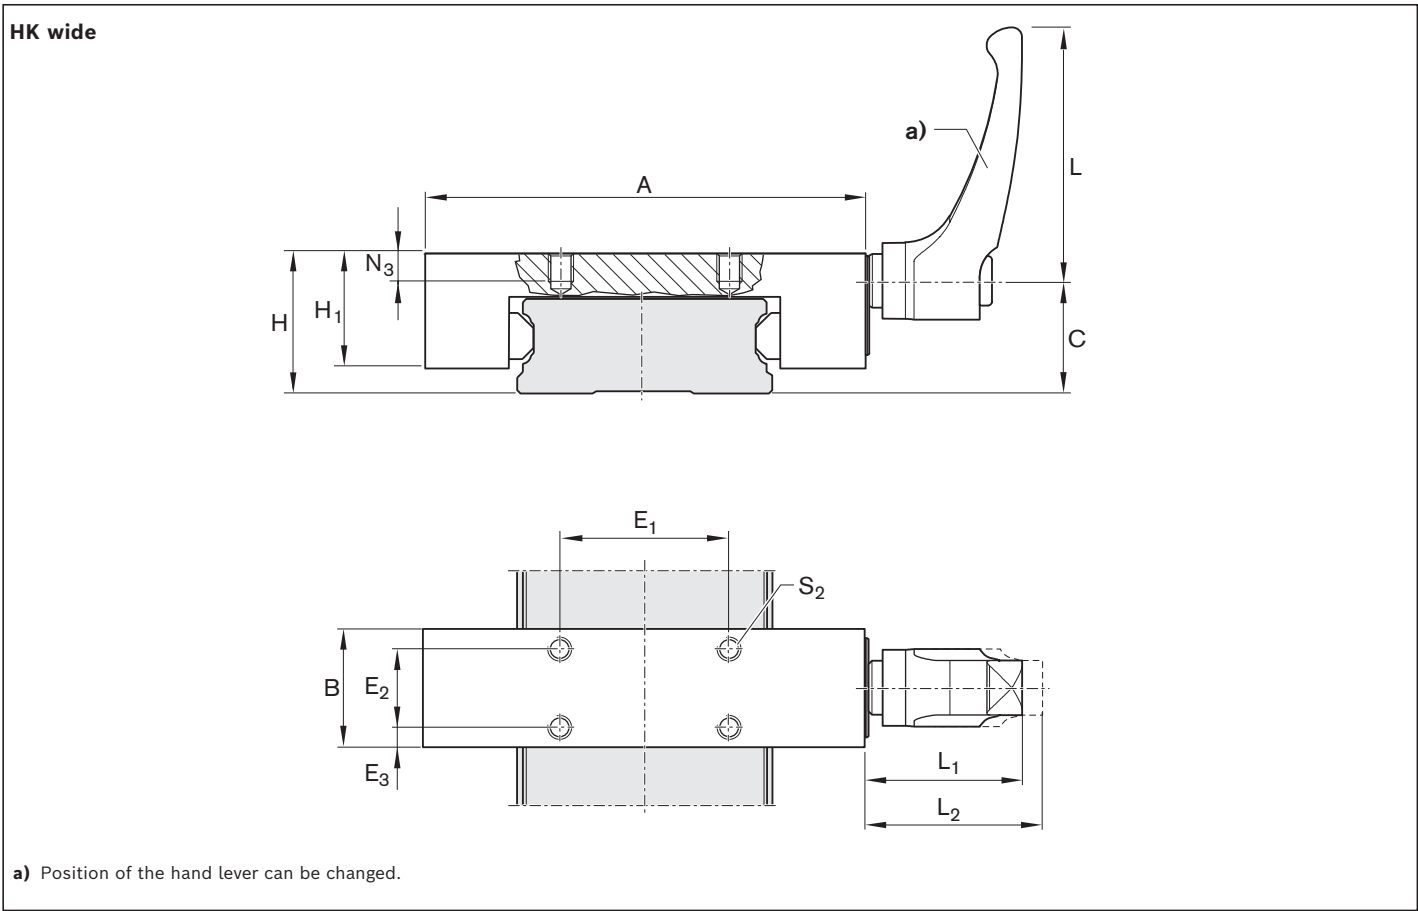

| Size  | Dimensions (mm) |    |      |                |                |                |    |                |    |                |                              |                |                | Mass<br>(kg) |
|-------|-----------------|----|------|----------------|----------------|----------------|----|----------------|----|----------------|------------------------------|----------------|----------------|--------------|
|       | A               | B  | C    | E <sub>1</sub> | E <sub>2</sub> | E <sub>3</sub> | H  | H <sub>1</sub> | L  | L <sub>1</sub> | L <sub>2</sub> <sup>3)</sup> | N <sub>3</sub> | S <sub>2</sub> |              |
| 25/70 | 120             | 39 | 28.2 | 50             | 25             | 7.0            | 35 | 30             | 64 | 38.5           | 41.5                         | 11             | M6             | 0.77         |
| 35/90 | 145             | 39 | 38.0 | 60             | 20             | 9.5            | 50 | 39             | 78 | 46.5           | 50.5                         | 11             | M8             | 1.38         |

1) Zimmer GmbH  
2) The inspection is done in a mounted state with a lubricated layer (ISO-VG 68).  
3) Hand lever disengaged

# Spacer plate<sup>1)</sup>

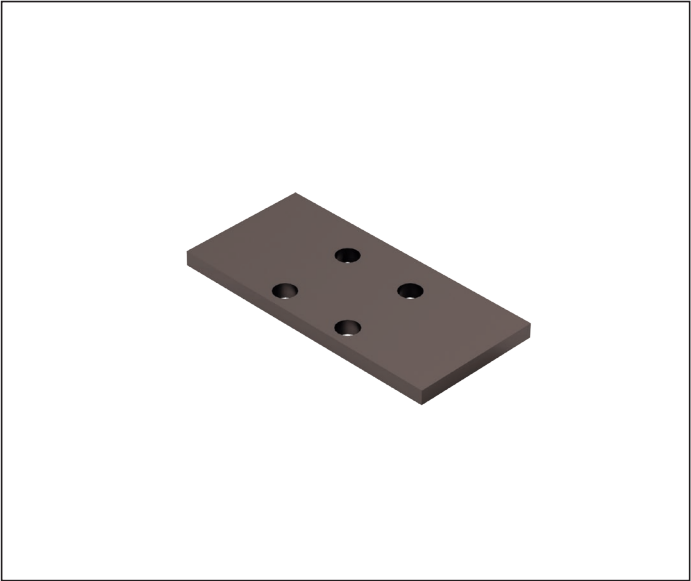


for clamping units MK, MKS and HK

**Note**

Suitable for mounting with high ball runner block SNH R1621 and SLH R1624.

Spacer plate

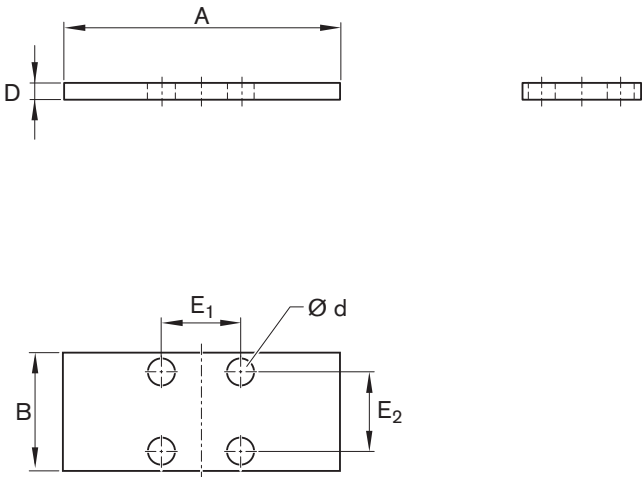

**R1619 .40 65**

Suitable for clamping units:

- R1619 .42 60 (MK)
- R1619 .40 60 (MKS)

| Size | Material number | Dimensions (mm) |    |    |      |                |                | Mass (kg) |
|------|-----------------|-----------------|----|----|------|----------------|----------------|-----------|
|      |                 | A               | B  | D  | d    | E <sub>1</sub> | E <sub>2</sub> |           |
| 15   | R1619 140 65    | 55              | 39 | 4  | 4.5  | 15             | 15             | 0.065     |
| 25   | R1619 240 65    | 75              | 35 | 4  | 6.5  | 20             | 20             | 0.078     |
| 30   | R1619 740 65    | 90              | 39 | 3  | 8.5  | 22             | 22             | 0.077     |
| 35   | R1619 340 65    | 100             | 39 | 7  | 8.5  | 24             | 24             | 0.202     |
| 45   | R1619 440 65    | 120             | 49 | 10 | 10.5 | 26             | 26             | 0.434     |
| 55   | R1619 540 65    | 128             | 49 | 10 | 10.5 | 30             | 30             | 0.465     |

**R1619 .42 .5**

Suitable for clamping units:

- R1619 .42 82 (HK)

| Size | Material number | Dimensions (mm) |                    |    |      |                |                | Mass (kg) |
|------|-----------------|-----------------|--------------------|----|------|----------------|----------------|-----------|
|      |                 | A               | B                  | D  | d    | E <sub>1</sub> | E <sub>2</sub> |           |
| 15   | R1619 142 85    | 47              | 24 <sub>-0.2</sub> | 4  | 4.5  | 17             | 17             | 0.035     |
| 25   | R1619 242 85    | 70              | 30                 | 4  | 6.5  | 20             | 20             | 0.062     |
| 30   | R1619 742 85    | 90              | 39                 | 3  | 6.5  | 22             | 22             | 0.080     |
| 35   | R1619 340 65    | 100             | 39                 | 7  | 8.5  | 24             | 24             | 0.202     |
| 45   | R1619 442 85    | 120             | 44                 | 10 | 10.5 | 26             | 26             | 0.387     |
| 55   | R1619 542 85    | 140             | 49                 | 10 | 14.5 | 30             | 30             | 0.511     |

1) Zimmer GmbH

# Safety instructions clamping and braking units

## General safety instructions

- ⚠ During all work on the clamping units, the respective valid instructions by UVV, VDE, the safety notes and instruction for mounting are to be observed!
- ⚠ The clamping units do not have any guiding function. A runner block can therefore not be replaced with a clamping unit. The ideal position of the clamping unit lies between two runner blocks. When using several clamping units, these should be distributed evenly on both guide rails in order to attain maximum rigidity for the overall construction.
- ⚠ For hydraulic clamping and braking units, the return pressure in the tank line must be lower than 1.5 bar!
- ⚠ Consider the response times of the clamping and braking units!
- ⚠ The clamping unit is not intended for securing suspended loads!
- ⚠ Do not remove the cover of the safety clamping unit - spring under tension!
- ⚠ The transport lock may only be removed if:
  - The hydraulic port has been pressurized with the operating pressure according to instructions.
  - The air port has been pressurized with compressed air to at least 4.5 bar (MBPS) or 5.5 bar (UBPS, MKS) according to instructions.
- ⚠ The Clamping Unit may only be de-pressurized when the appropriate ball guide rail or transport lock is in position between the contact profiles!
- ⚠ The use of clamping and braking units is not permissible on ball guide rails with integrated measuring systems.

## Additional notes for clamping and braking units

- ⚠ The clamping and braking units are suitable for usage in safety-critical applications for braking and clamping. The safe function of the total system in which the clamping and braking units are used is primarily defined by the controller for this system. The technical configuration of this system and the controller is to be undertaken by the manufacturer of the higher level system, assembly, plant or machine. During this process the safety-related requirements for functional safety are to be observed.

## Additional notes for clamping units

- ⚠ The unit may not be used as a braking unit! For use only when the axis is at a standstill!
- ⚠ Pressure may only be applied when the unit is properly mounted on the ball guide rail!



## General instructions for mounting

The following notes relating to mounting apply to all ball rail systems. However, different specifications exist with regard to the parallelism of the ball guide rails and to bolting the ball runner blocks with screws and locating pins. This information is provided separately alongside the descriptions of the individual types of ball rail systems.

- ⚠** In the case of overhead installation (hanging installation) or vertical installation, the ball runner block can release from the ball guide rail due to the balls being lost or broken. Secure the ball runner block from falling! Risk of death!  
We recommend protection against falling loads!
- ⚠** Rexroth ball rail systems are high-quality products. Use with extreme care during transport and mounting. The same care must be taken with cover strips. All steel parts are protected with anti-corrosion oil. It is not necessary to remove this oil, provided that the recommended lubricants are used.

### Installation examples

#### Ball guide rails

Each ball guide rail has ground reference surfaces on both sides.

Possibilities for side fixing:

- 1** Reference edges
- 2** Clamping strips
- 3** V-guides

#### Note

- Ball guide rails without side fixing have to be aligned straight and parallel when mounting, preferably using a straightedge.
- For guideline values for permissible lateral force without additional lateral retention, see corresponding ball runner blocks and instructions for mounting, page 206.


#### Ball runner blocks

Each ball runner block has a ground reference edge on one side (see dimension  $V_1$  in the dimension drawings).


Possibilities for additional fixing:

- 1** Reference edges
- 2** Clamping strips
- 4** Locating pins

#### Mounting with fixing of both ball guide rails and both ball runner blocks

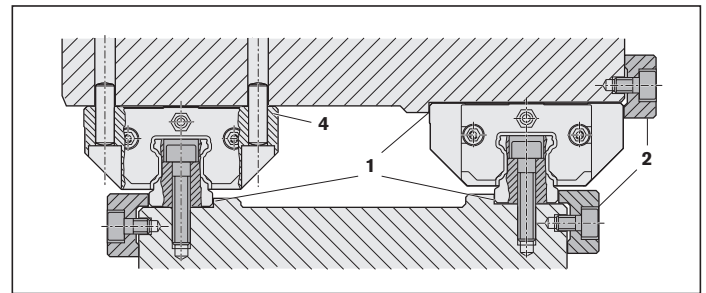

#### Mounting with fixing of one ball guide rail and one ball runner block

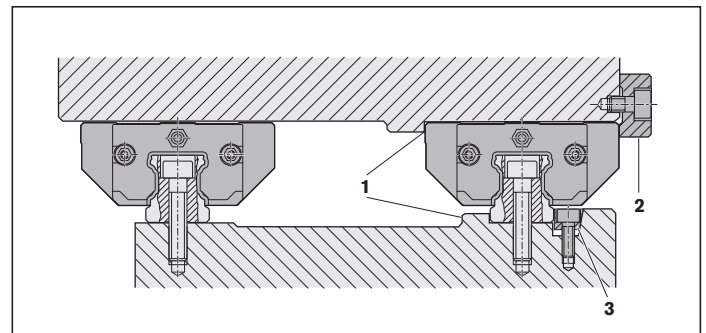

#### Notes

- Before installing the components, clean and degrease all mounting surfaces.
- Please ask for the "Mounting Instructions for ball rail systems".
- After mounting, it should be possible to move the ball runner block easily.



# Fastener

## Calculating screw connections

The screw connections in runner blocks and roller guide rails produce maximum static traction forces  $F_{0z \max}$ , maximum static torsional moments  $M_{0x \max}$  and maximum static side load  $F_{0y \max}$  without stop strips that the linear guide can transfer. This means, the maximum load on a profiled rail system is defined not only by the static load capacities  $C_0$  in accordance with ISO 14728 Part 2 and the static load moments  $M_{t0}$ , but also by the screw connections.

As a rule, ball runner blocks are fastened using 4 or 6 screws. Ball guide rails have one or two rows of screw connections in regular distances, whereby the screws located directly under the runner block are subject to the most stress. If the runner block and rail are fastened with screws in the same strength class, the bolting between the rail and the mounting base (O3 or O6) is critical to the maximum forces and moments that can be transferred.


Calculation of the values in the table for strength class 8.8, 10.9 and 12.9 are based on DIN 637 (August 2013):

Ball bearings – safety regulations for dimensioning and operation of profiled rail systems with recirculating rolling elements. In comparison to the standard, the values determined by Bosch Rexroth include a higher safety factor. Screw connections are calculated based on the dimensions in the catalog (screw sizes, runner block lengths, clamping lengths, screw-in depths, bore diameters, rail separations of the rail bore holes, rail width, etc.). Deviant screw connections are to be recalculated according to VDI 2230. The maximum static traction force and maximum static torsional moment of a ball guide rail system are the product of the sum of the axial forces on the rail screws within the flow of forces. However, for the maximum static side load, the sum of the clamping forces on the rail screws within the flow of forces is crucial.

### Input values for calculation:

- |                                            |                  |
|--------------------------------------------|------------------|
| - Friction coefficient in the thread       | $\mu_G = 0.125$  |
| - Friction coefficient at the head surface | $\mu_K = 0.125$  |
| - Friction coefficient in the joint        | $\mu_T = 0.2$    |
| - Tightening torque for torque wrench      | $\alpha_A = 1.5$ |

The applied friction coefficients and the tightening torque are common values in practice. Depending on the customer application and mounting procedure, the actual input parameters may deviate considerably from the assumptions. This must be checked after each sizing and screw connections must be recalculated with actual values according to VDI 2230 as necessary. Even slight deviations from the assumptions in the Bosch Rexroth calculations lead to variations in tightening torque and maximum transferable static tension forces, torsional moments and lateral forces.

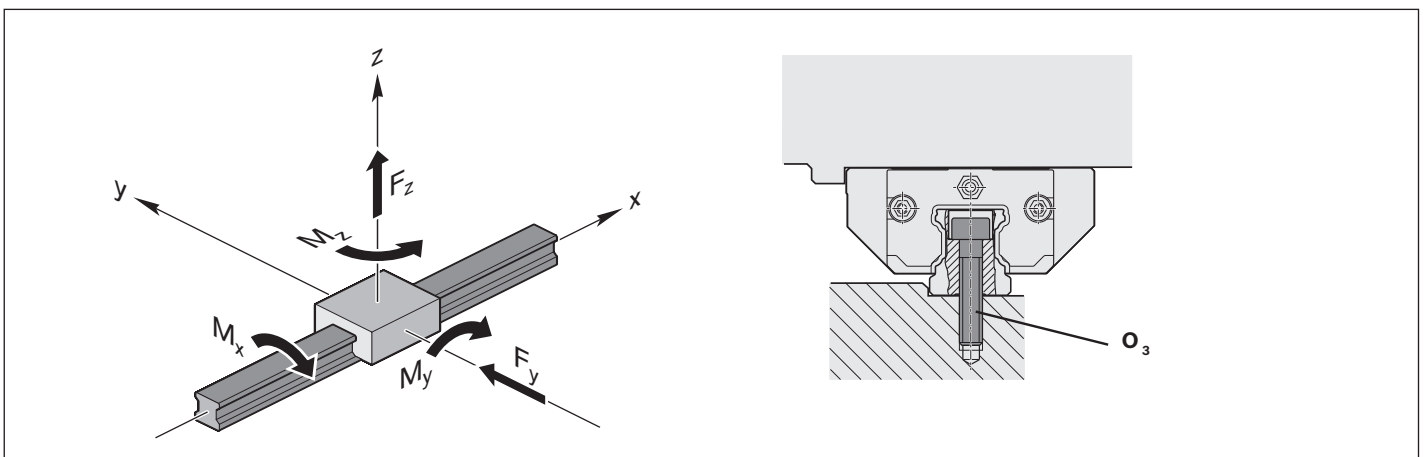

# Fastener

## Tightening torques for profiled rail systems

The tightening torques for screw strength classes 8.8, 10.9 and 12.9 were calculated for the dimensions of a Rexroth ball rail system. Detailed descriptions of the possible screw connections O1 to O6 can be found on the following pages.

### Runner block

| Size | FKS, FNS, FLS, FKN, FNN, BNS, CNS |      |      |                        |      |      | SKS, SNS, SLS, SKN, SNN, SNH, SLH |      |      |     |      |      |
|------|-----------------------------------|------|------|------------------------|------|------|-----------------------------------|------|------|-----|------|------|
|      | For bolting from above            |      |      | For bolting from below |      |      | For bolting from above            |      |      |     |      |      |
|      | O4                                |      |      | O1&O2                  |      |      | O5                                |      |      |     |      |      |
|      | 8.8                               | 10.9 | 12.9 | 8.8                    | 10.9 | 12.9 | 8.8                               | 10.9 | 12.9 | 8.8 | 10.9 | 12.9 |
|      | M <sub>A</sub> [Nm]               |      |      | M <sub>A</sub> [Nm]    |      |      | M <sub>A</sub> [Nm]               |      |      |     |      |      |
| 15   | M5                                | 6.3  | 9.2  | 11                     | M4   | 3.3  | 4.8                               | 4.9  | M4   | 3.1 | 4.6  | 5.4  |
| 20   | M6                                | 11   | 16   | 18                     | M5   | 6.5  | 9.5                               | 11   | M5   | 6.3 | 9.2  | 11   |
| 25   | M8                                | 26   | 38   | 44                     | M6   | 8.4  | 8.4                               | 8.4  | M6   | 11  | 16   | 18   |
| 30   | M10                               | 51   | 74   | 87                     | M8   | 27   | 28                                | 28   | M8   | 26  | 38   | 44   |
| 35   | M10                               | 51   | 74   | 87                     | M8   | 27   | 28                                | 28   | M8   | 26  | 38   | 44   |
| 45   | M12                               | 87   | 130  | 130                    | M10  | 52   | 66                                | 66   | M10  | 51  | 74   | 87   |
| 55   | M14                               | 140  | 200  | 220                    | M12  | 81   | 81                                | 81   | M12  | 87  | 130  | 130  |
| 65   | M16                               | 210  | 310  | 340                    | M14  | 140  | 150                               | 150  | M16  | 210 | 310  | 340  |

### Guide rail

| Size | For bolting from above |      |      |     | For bolting from below |      |      |     |
|------|------------------------|------|------|-----|------------------------|------|------|-----|
|      | O3                     |      |      |     | O6                     |      |      |     |
|      | 8.8                    | 10.9 | 12.9 |     | 8.8                    | 10.9 | 12.9 |     |
|      | M <sub>A</sub> [Nm]    |      |      |     | M <sub>A</sub> [Nm]    |      |      |     |
| 15   | M4                     | 3.1  | 4.6  | 5.4 | M5                     | 6.3  | 9.2  | 11  |
| 20   | M5                     | 6.4  | 9.4  | 11  | M6                     | 11   | 16   | 18  |
| 25   | M6                     | 11   | 16   | 18  | M6                     | 11   | 16   | 18  |
| 30   | M8                     | 26   | 38   | 44  | M8                     | 26   | 38   | 44  |
| 35   | M8                     | 26   | 38   | 44  | M8                     | 26   | 38   | 44  |
| 45   | M12                    | 88   | 110  | 110 | M12                    | 87   | 130  | 140 |
| 55   | M14                    | 140  | 190  | 190 | M14                    | 140  | 200  | 230 |
| 65   | M16                    | 220  | 300  | 300 | M16                    | 210  | 310  | 360 |


## Maximum static traction forces and torsional moments on profiled rail systems

The screw connections in a profiled rail system can only transfer a limited traction force  $F_z$  or a limited torsional moment  $M_x$ . If these limit values are exceeded, the guideway will lift off of the adjacent structure. The permissible values for a guideway are the product of the maximum possible axial force on a screw connection in the guide rail. Exceeding the indicated maximum static load is not permissible.

The table values are guidelines for the permissible static traction force  $F_{0z \max}$  and torsional moments  $M_{0x \max}$  that are only applicable when the following conditions are met:

- Screw sizes, screw quantity and connecting dimensions as listed in the catalog
- Same fastening screw strength class for runner blocks and rails
- Steel adjacent structure
- Traction force  $F_z$  or torsional moment  $M_x$  are static
- Traction force  $F_z$  and torsional moment  $M_x$  do not occur simultaneously
- No interaction with side load  $F_y$  or longitudinal moment  $M_y / M_z$

If these conditions are not met, recalculate the screw connection in accordance with VDI 2230. If the applied loads are just below the limit values, Bosch Rexroth also recommends checking the screw connections.



### Tensile forces

| Size      | Maximum static tensile forces $F_{0z \max}$ in [N]                                                |             |             |                                                                                                           |             |             |                                                                                                    |             |             |
|-----------|---------------------------------------------------------------------------------------------------|-------------|-------------|-----------------------------------------------------------------------------------------------------------|-------------|-------------|----------------------------------------------------------------------------------------------------|-------------|-------------|
|           | <br><b>Short</b> |             |             | <br><b>Normal length</b> |             |             | <br><b>Long</b> |             |             |
|           | <b>xKx</b>                                                                                        |             |             | <b>xNx</b>                                                                                                |             |             | <b>xLx</b>                                                                                         |             |             |
|           | <b>8.8</b>                                                                                        | <b>10.9</b> | <b>12.9</b> | <b>8.8</b>                                                                                                | <b>10.9</b> | <b>12.9</b> | <b>8.8</b>                                                                                         | <b>10.9</b> | <b>12.9</b> |
| <b>15</b> | 2 410                                                                                             | 3 900       | 4 700       | 2 410                                                                                                     | 3 900       | 4 700       | 2 410                                                                                              | 3 900       | 4 700       |
| <b>20</b> | 4 220                                                                                             | 6 690       | 8 010       | 4 220                                                                                                     | 6 690       | 8 010       | 4 600                                                                                              | 7 300       | 8 730       |
| <b>25</b> | 5 520                                                                                             | 8 740       | 10 500      | 5 520                                                                                                     | 8 740       | 10 500      | 7 340                                                                                              | 11 600      | 13 900      |
| <b>30</b> | 10 100                                                                                            | 16 000      | 19 200      | 10 100                                                                                                    | 16 000      | 19 200      | 11 300                                                                                             | 17 900      | 21 500      |
| <b>35</b> | 10 500                                                                                            | 16 400      | 19 600      | 10 500                                                                                                    | 16 400      | 19 600      | 13 900                                                                                             | 21 700      | 25 900      |
| <b>45</b> | 25 400                                                                                            | 34 900      | 34 900      | 25 400                                                                                                    | 34 900      | 34 900      | 32 300                                                                                             | 44 300      | 44 300      |
| <b>55</b> | 36 500                                                                                            | 53 700      | 53 700      | 36 500                                                                                                    | 53 700      | 53 700      | 47 400                                                                                             | 69 800      | 69 800      |
| <b>65</b> | 50 600                                                                                            | 76 400      | 77 500      | 50 600                                                                                                    | 76 400      | 77 500      | 65 800                                                                                             | 99 400      | 101 000     |

### Torsional moments

| Size      | Maximum static torsional moments $M_{0x \max}$ in [Nm]                                              |             |             |                                                                                                             |             |             |                                                                                                      |             |             |
|-----------|-----------------------------------------------------------------------------------------------------|-------------|-------------|-------------------------------------------------------------------------------------------------------------|-------------|-------------|------------------------------------------------------------------------------------------------------|-------------|-------------|
|           | <br><b>Short</b> |             |             | <br><b>Normal length</b> |             |             | <br><b>Long</b> |             |             |
|           | <b>xKx</b>                                                                                          |             |             | <b>xNx</b>                                                                                                  |             |             | <b>xLx</b>                                                                                           |             |             |
|           | <b>8.8</b>                                                                                          | <b>10.9</b> | <b>12.9</b> | <b>8.8</b>                                                                                                  | <b>10.9</b> | <b>12.9</b> | <b>8.8</b>                                                                                           | <b>10.9</b> | <b>12.9</b> |
| <b>15</b> | 16                                                                                                  | 26          | 31          | 16                                                                                                          | 26          | 31          | 16                                                                                                   | 26          | 31          |
| <b>20</b> | 38                                                                                                  | 60          | 72          | 38                                                                                                          | 60          | 72          | 41                                                                                                   | 66          | 79          |
| <b>25</b> | 58                                                                                                  | 92          | 110         | 58                                                                                                          | 92          | 110         | 77                                                                                                   | 120         | 150         |
| <b>30</b> | 130                                                                                                 | 210         | 250         | 130                                                                                                         | 210         | 250         | 150                                                                                                  | 230         | 280         |
| <b>35</b> | 170                                                                                                 | 260         | 310         | 170                                                                                                         | 260         | 310         | 220                                                                                                  | 350         | 410         |
| <b>45</b> | 550                                                                                                 | 750         | 750         | 550                                                                                                         | 750         | 750         | 690                                                                                                  | 950         | 950         |
| <b>55</b> | 910                                                                                                 | 1 340       | 1 340       | 910                                                                                                         | 1 340       | 1 340       | 1 190                                                                                                | 1 740       | 1 740       |
| <b>65</b> | 1 490                                                                                               | 2 250       | 2 290       | 1 490                                                                                                       | 2 250       | 2 290       | 1 940                                                                                                | 2 930       | 2 970       |


Fastener

Maximum static side load without stop strips

For a secure structure, Rexroth recommends using stop strips on the runner block and guide rail. If stop strips are not used on the runner block or the rail, then if a load is applied in the transverse direction the guideway may slip. The clamping force of the screw connection is too low as soon as the side loads in the table are exceeded. The table values are guideline values for the permissible static side loads  $F_{0\ y\ max}$  that are only applicable when the following conditions are met:

- Screw sizes, screw quantity and connecting dimensions as listed in the catalog
- Same fastening screw strength class for runner blocks and rails
- Steel adjacent structure
- No interaction with traction force  $F_z$ , torsional moments  $M_x$  or longitudinal moments  $M_y / M_z$

If these conditions are not met, recalculate the screw connection in accordance with VDI 2230. If the applied loads are just below the limit values, Bosch Rexroth also recommends checking the screw connections.

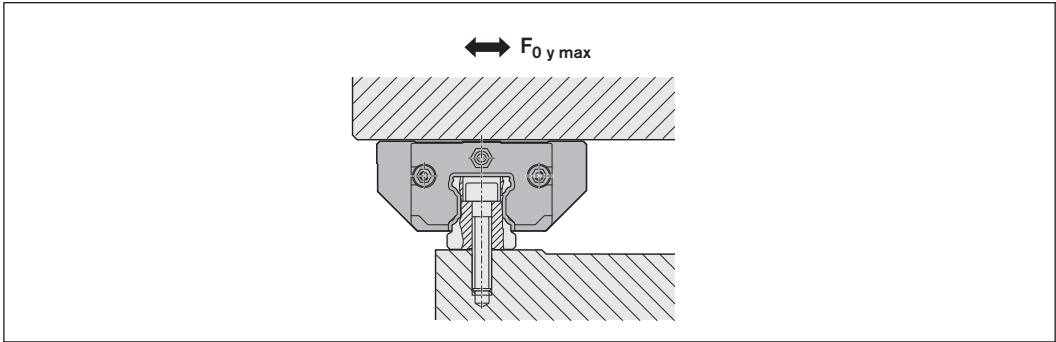

Lateral forces

| Size | Maximum static lateral forces $F_{0\ y\ max}$ in [N]                                         |        |        |                                                                                                      |        |        |                                                                                               |        |        |
|------|----------------------------------------------------------------------------------------------|--------|--------|------------------------------------------------------------------------------------------------------|--------|--------|-----------------------------------------------------------------------------------------------|--------|--------|
|      | <br>Short |        |        | <br>Normal length |        |        | <br>Long |        |        |
|      | xKx                                                                                          |        |        | xNx                                                                                                  |        |        | xLx                                                                                           |        |        |
|      | 8.8                                                                                          | 10.9   | 12.9   | 8.8                                                                                                  | 10.9   | 12.9   | 8.8                                                                                           | 10.9   | 12.9   |
| 15   | 370                                                                                          | 600    | 720    | 370                                                                                                  | 600    | 720    | 370                                                                                           | 600    | 720    |
| 20   | 640                                                                                          | 1 010  | 1 210  | 640                                                                                                  | 1 010  | 1 210  | 690                                                                                           | 1 100  | 1 320  |
| 25   | 900                                                                                          | 1 430  | 1 710  | 900                                                                                                  | 1 430  | 1 710  | 1 200                                                                                         | 1 900  | 2 270  |
| 30   | 1 630                                                                                        | 2 600  | 3 110  | 1 630                                                                                                | 2 600  | 3 110  | 1 830                                                                                         | 2 910  | 3 480  |
| 35   | 1 710                                                                                        | 2 670  | 3 190  | 1 710                                                                                                | 2 670  | 3 190  | 2 260                                                                                         | 3 530  | 4 210  |
| 45   | 4 110                                                                                        | 5 330  | 5 330  | 4 110                                                                                                | 5 330  | 5 330  | 5 220                                                                                         | 6 770  | 6 770  |
| 55   | 5 920                                                                                        | 8 220  | 8 220  | 5 920                                                                                                | 8 220  | 8 220  | 7 700                                                                                         | 10 700 | 10 700 |
| 65   | 8 210                                                                                        | 11 800 | 11 800 | 8 210                                                                                                | 11 800 | 11 800 | 10 700                                                                                        | 15 300 | 15 300 |

### Reference edges, corner radii

### Combination examples


The combinations shown here are examples. Basically, any ball runner block may be combined with any of the ball guide rail types offered.

### Fastening screws

⚠ Always make sure the screws are secure where there are high screw loads!

For more information on this topic, see section "General instructions for mounting".

### Ball guide rail with normal and long ball runner blocks

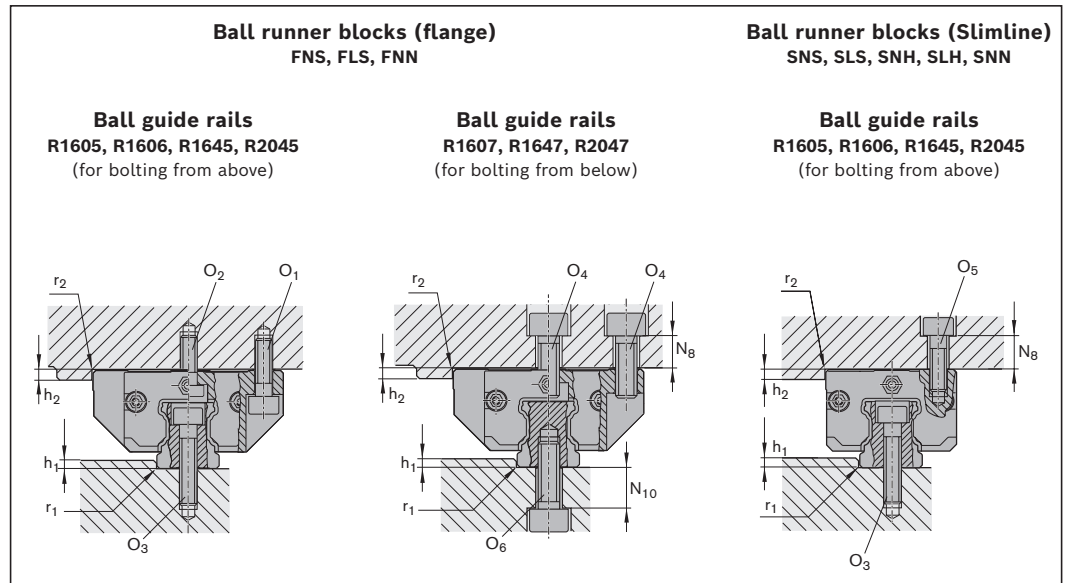

| Size | Dimensions (mm) |                  |       |                        |           |             |             |
|------|-----------------|------------------|-------|------------------------|-----------|-------------|-------------|
|      | $h_{1\min}$     | $h_{1\max}^{1)}$ | $h_2$ | $N_8$                  | $N_{10}$  | $r_{1\max}$ | $r_{2\max}$ |
| 15   | 2.5             | 3.5              | 4     | 6                      | 7.0       | 0.4         | 0.6         |
| 20   | 2.5             | 4.0              | 5     | 9<br>10 <sup>3)</sup>  | 9.5<br>–  | 0.6         | 0.6         |
| 25   | 3.0             | 5.0              | 5     | 10<br>11 <sup>3)</sup> | 12.0<br>– | 0.8         | 0.8         |
| 30   | 3.0             | 5.0              | 6     | 10                     | 9.0       | 0.8         | 0.8         |
| 35   | 3.5             | 6.0              | 6     | 13                     | 13        | 0.8         | 0.8         |
| 45   | 4.5             | 8.0              | 8     | 14                     | 13        | 0.8         | 0.8         |
| 55   | 7.0             | 10.0             | 10    | 20                     | 23        | 1.2         | 1.0         |
| 65   | 7.0             | 10.0             | 14    | 22                     | 26        | 1.2         | 1.0         |

1) When using clamping and braking units, please take account of the values H1.

| Size | Screw sizes                   |                                    |                                       |                               | Ball guide rail   |                   |
|------|-------------------------------|------------------------------------|---------------------------------------|-------------------------------|-------------------|-------------------|
|      | Ball runner blocks            |                                    |                                       |                               |                   |                   |
|      | $O_1$<br>ISO 4762<br>4 pieces | $O_2^{2)}$<br>DIN 6912<br>2 pieces | $O_4^{1) 2)}$<br>ISO 4762<br>6 pieces | $O_5$<br>ISO 4762<br>4 pieces | $O_3$<br>ISO 4762 | $O_6$<br>ISO 4762 |
| 15   | M4x12                         | M4x10                              | M5x12                                 | M4x12                         | M4x20             | M5x12             |
| 20   | M5x16                         | M5x12                              | M6x16                                 | M5x16                         | M5x25             | M6x16             |
| 25   | M6x20                         | M6x16                              | M8x20                                 | M6x18                         | M6x30             | M6x20             |
| 30   | M8x25                         | M8x16                              | M10x20                                | M8x20                         | M8x30             | M8x20             |
| 35   | M8x25                         | M8x20                              | M10x25                                | M8x25                         | M8x35             | M8x25             |
| 45   | M10x30                        | M10x25                             | M12x30                                | M10x30                        | M12x45            | M12x30            |
| 55   | M12x40                        | M12x30                             | M14x40                                | M12x35                        | M14x50            | M14x40            |
| 65   | M14x45                        | M14x35                             | M16x45                                | M16x40                        | M16x60            | M16x45            |

- For fixing the ball runner block from above with only 4  $O_4$  screws:  
Permissible side load 1/3 lower, and lower rigidity
- When fastening the ball runner block with 6 screws:  
Tighten centerline screws to tightening torque  $M_A$  of strength class 8.8
- Ball runner block SNN

Fastener

Locating pins

▲ If the guideline values for the permissible lateral force are exceeded (see the corresponding ball runner blocks), you must fix the ball runner block additionally by pinning.


For the recommended dimensions for pin holes, refer to the dimension drawing and the dimensions.

Possible pin types

- ▶ Tapered pin (hardened) or
- ▶ Straight pin DIN ISO 8734

Note

- ▶ At the recommended positions for pin holes, there may be pre-drilled holes in the middle of the ball runner block due to production-related issues ( $\varnothing < S_{10}$ ). They are suitable for drilling out.
- ▶ If it is necessary to carry out pinning at a different position (e.g. the middle lube connection), dimension  $E_2$  must not be exceeded in the longitudinal direction (for dimension  $E_2$ , refer to the dimension tables of the corresponding ball runner blocks). Comply with dimensions  $E_1$  and  $E_4$ !
- ▶ Do not finish the pin holes until after installation.
- ▶ Please request the "Mounting instructions for ball rail systems".

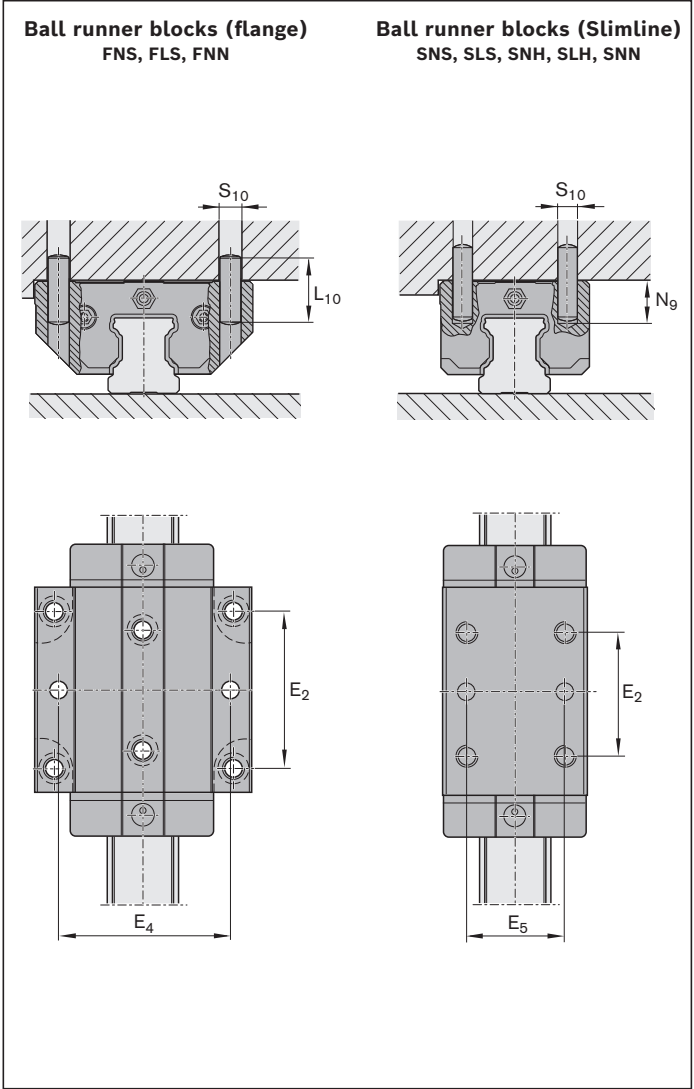

| Size | Dimensions (mm)        |       |               |                          |               |
|------|------------------------|-------|---------------|--------------------------|---------------|
|      | $E_4$                  | $E_5$ | $L_{10}^{1)}$ | $N_{9\max}$              | $S_{10}^{1)}$ |
| 15   | 38                     | 26    | 18            | 6.0                      | 4             |
| 20   | 53<br>49 <sup>2)</sup> | 32    | 24            | 7.5<br>6.5 <sup>2)</sup> | 5             |
| 25   | 55<br>60 <sup>2)</sup> | 35    | 32            | 9.0<br>7.0 <sup>2)</sup> | 6             |
| 30   | 70                     | 40    | 36            | 12.0                     | 8             |
| 35   | 80                     | 50    | 40            | 13.0                     | 8             |
| 45   | 98                     | 60    | 50            | 18.0                     | 10            |
| 55   | 114                    | 75    | 60            | 19.0                     | 12            |
| 65   | 140                    | 76    | 60            | 22.0                     | 14            |

- 1) Tapered pin (hardened) or straight pin (DIN ISO 8734)
- 2) Ball runner blocks FNN and SNN

### Reference edges, corner radii

#### Combination examples

The combinations shown here are examples. Basically, any ball runner block may be combined with any of the ball guide rail types offered.


The bolting of the ball runner blocks with 2 screws is completely sufficient up to the maximum load. (For maximum load capacity and load moments, see corresponding ball runner blocks).

#### Fastening screws

⚠ Always make sure the screws are secure where there are high screw loads!

For more information on this topic, see section "General instructions for mounting".

### Ball guide rail with ball runner block, short and super.

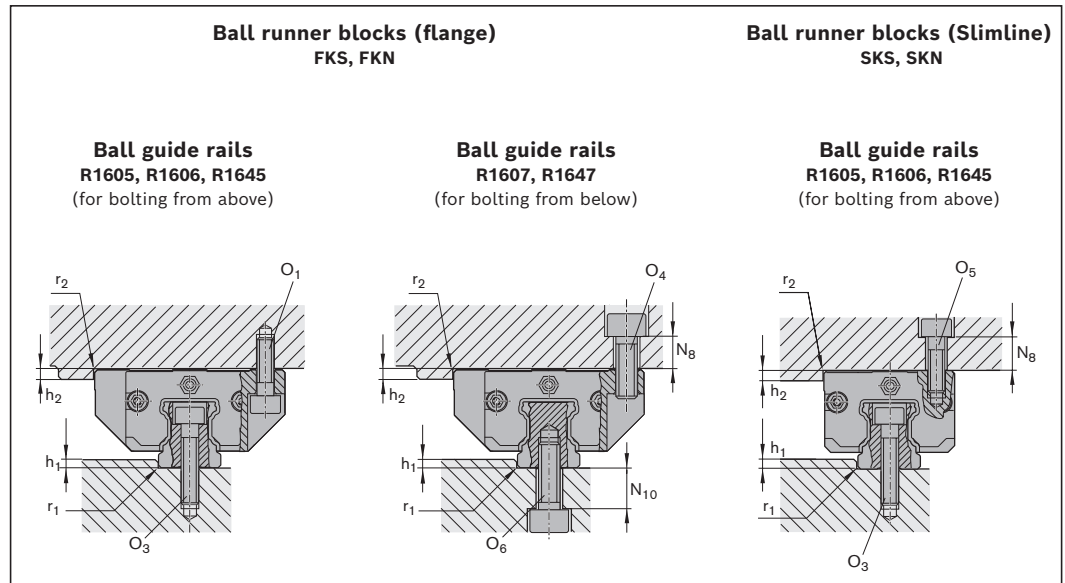

| Size | Dimensions (mm) |                   |       |                  |          |              |              |
|------|-----------------|-------------------|-------|------------------|----------|--------------|--------------|
|      | $h_{1 \min}$    | $h_{1 \max}^{1)}$ | $h_2$ | $N_8$            | $N_{10}$ | $r_{1 \max}$ | $r_{2 \max}$ |
| 15   | 2.5             | 3.5               | 4     | 6                | 7.0      | 0.4          | 0.6          |
| 20   | 2.5             | 4.0               | 5     | 9                | 9.5      | 0.6          | 0.6          |
|      |                 |                   |       | 10 <sup>2)</sup> | –        |              |              |
| 25   | 3.0             | 5.0               | 5     | 10               | 12.0     | 0.8          | 0.8          |
|      |                 |                   |       | 11 <sup>2)</sup> | –        |              |              |
| 30   | 3.0             | 5.0               | 6     | 10               | 9.0      | 0.8          | 0.8          |
| 35   | 3.5             | 6.0               | 6     | 13               | 13.0     | 0.8          | 0.8          |

1) When using clamping and braking units, please take account of the values H1.

2) Ball runner block SKN

| Size | Screw sizes<br>Ball runner blocks |                               |                               | Ball guide rail   |                   |
|------|-----------------------------------|-------------------------------|-------------------------------|-------------------|-------------------|
|      | $O_1$<br>ISO 4762<br>2 pieces     | $O_4$<br>ISO 4762<br>2 pieces | $O_5$<br>ISO 4762<br>2 pieces | $O_3$<br>ISO 4762 | $O_6$<br>ISO 4762 |
| 15   | M4x12                             | M5x12                         | M4x12                         | M4x20             | M5x12             |
| 20   | M5x16                             | M6x16                         | M5x16                         | M5x25             | M6x16             |
| 25   | M6x20                             | M8x20                         | M6x18                         | M6x30             | M6x20             |
| 30   | M8x25                             | M10x20                        | M8x20                         | M8x30             | M8x20             |
| 35   | M8x25                             | M10x25                        | M8x25                         | M8x35             | M8x25             |

Fastener

Locating pins

⚠ If the guideline values for the permissible lateral force are exceeded (see the corresponding ball runner blocks), you must fix the ball runner block additionally by pinning.


For the recommended dimensions for pin holes, refer to the dimension drawing and the dimensions.

Possible pin types

- ▶ Tapered pin (hardened) or
- ▶ Straight pin DIN ISO 8734

Note

- ▶ At the recommended positions for pin holes, there may be pre-drilled holes in the middle of the ball runner block due to production-related issues ( $\varnothing < S_{10}$ ). They are suitable for drilling out. Comply with dimensions  $E_4$  and  $E_5$ !
- ▶ Do not complete the pin holes until after mounting. Please request the "Mounting instructions for ball rail systems".

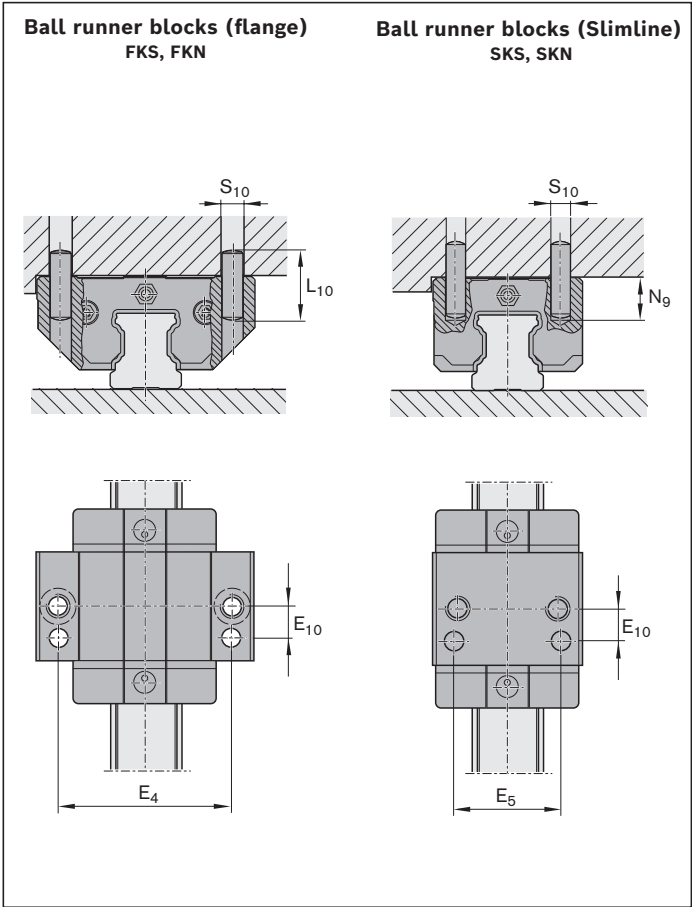


| Size | Dimensions (mm)  |       |          |               |                   |               |
|------|------------------|-------|----------|---------------|-------------------|---------------|
|      | $E_4$            | $E_5$ | $E_{10}$ | $L_{10}^{1)}$ | $N_{9\ max}$      | $S_{10}^{1)}$ |
| 15   | 38               | 26    | 9        | 18            | 3.0               | 4             |
| 20   | 53               | 32    | 10       | 24            | 3.5               | 5             |
|      | 49 <sup>2)</sup> |       |          |               | 2.0 <sup>2)</sup> |               |
| 25   | 55               | 35    | 11       | 32            | 7.0               | 6             |
|      | 60 <sup>2)</sup> |       |          |               | 5.0 <sup>2)</sup> |               |
| 30   | 70               | 40    | 14       | 36            | 10.0              | 8             |
| 35   | 80               | 50    | 15       | 40            | 12.0              | 8             |

- 1) Tapered pin (hardened) or straight pin (DIN ISO 8734)
- 2) Ball runner blocks FKN and SKN

Permissible misalignments for super ball runner blocks

On the ball guide rail and on the ball runner block

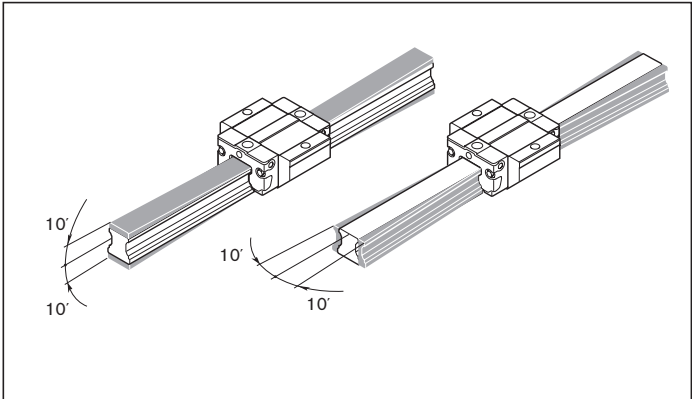



**Ball guide rail with ball runner block, wide**

**Reference edges,  
corner radii, screw sizes**



**Combination examples**

The combinations shown here are examples. Basically, any ball runner block may be combined with any of the ball guide rail types offered.

**Fastening screws**

⚠ Always make sure the screws are secure where there are high screw loads!

For more information on this topic, see section "General instructions for mounting".

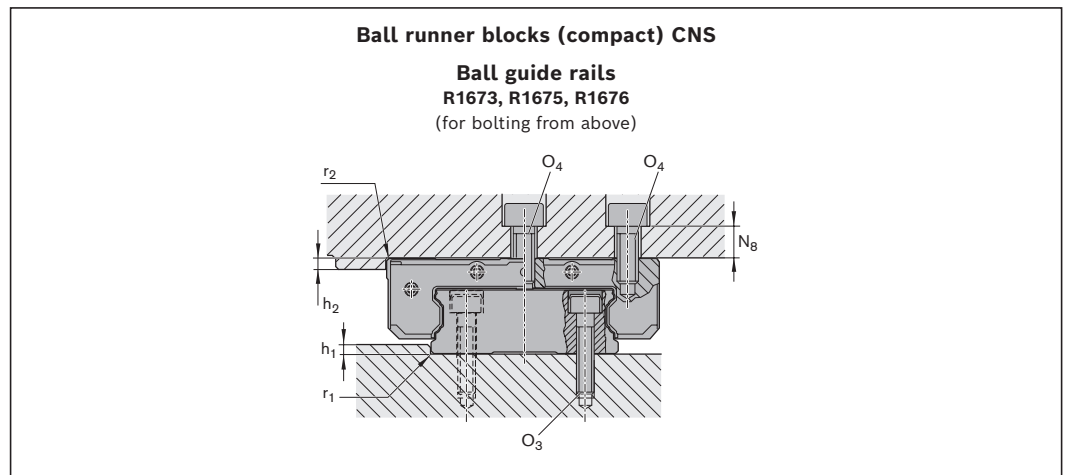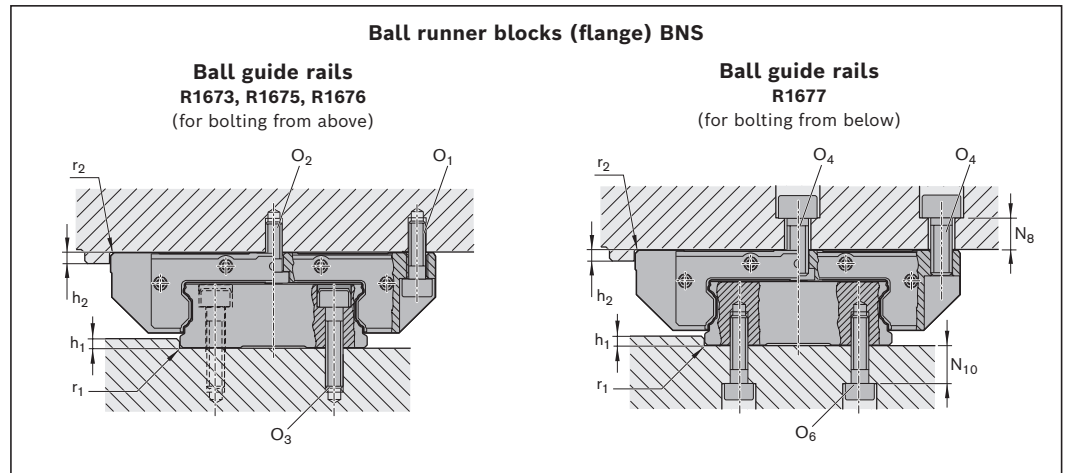

| Size         | Dimensions (mm) |                         |       |       |                     |          |           |           |
|--------------|-----------------|-------------------------|-------|-------|---------------------|----------|-----------|-----------|
|              | $h_1$ min       | $h_1$ max <sup>1)</sup> | $h_2$ | $N_8$ | $N_8$ <sup>2)</sup> | $N_{10}$ | $r_1$ max | $r_2$ max |
| <b>20/40</b> | 2.0             | 2.5                     | 4     | 9.5   | 11                  | 5.5      | 0.5       | 0.5       |
| <b>25/70</b> | 3.0             | 4.5                     | 5     | 10.0  | 13                  | 9.0      | 0.8       | 0.8       |
| <b>35/90</b> | 3.5             | 6.0                     | 6     | 13.0  | –                   | 11.0     | 0.8       | 0.8       |

| Size         | Screw sizes<br>Ball runner blocks |                                             |                                             | Ball guide rail   |                   |
|--------------|-----------------------------------|---------------------------------------------|---------------------------------------------|-------------------|-------------------|
|              | $O_1$<br>ISO 4762<br>4 pieces     | $O_2$ <sup>3)</sup><br>DIN 6912<br>2 pieces | $O_4$ <sup>3)</sup><br>ISO 4762<br>6 pieces | $O_3$<br>ISO 4762 | $O_6$<br>ISO 4762 |
| <b>20/40</b> | M5x16                             | –                                           | M6x16                                       | M4x20             | M5x12             |
| <b>25/70</b> | M6x20                             | M6x16                                       | M8x20                                       | M6x30             | M6x20             |
| <b>35/90</b> | M8x25                             | M8x20                                       | M10x25                                      | M8x35             | M8x25             |

1) When using clamping and braking units, please take account of the values H1.

2) Ball runner block CNS

3) When fastening the ball runner block with 6 screws:

Tighten centerline screws to tightening torque  $M_A$  of strength class 8.8.

As a matter of principle, centerline fastening screws should be used as well, otherwise there is a risk of a decreasing preload.

Fastener


Locating pins

⚠ If the guideline values for the permissible lateral force are exceeded (see the corresponding ball runner blocks), you must fix the ball runner block additionally by pinning.

For the recommended dimensions for pin holes, refer to the dimension drawing and the dimensions.

Possible pin types

- ▶ Tapered pin (hardened) or
- ▶ Straight pin DIN ISO 8734

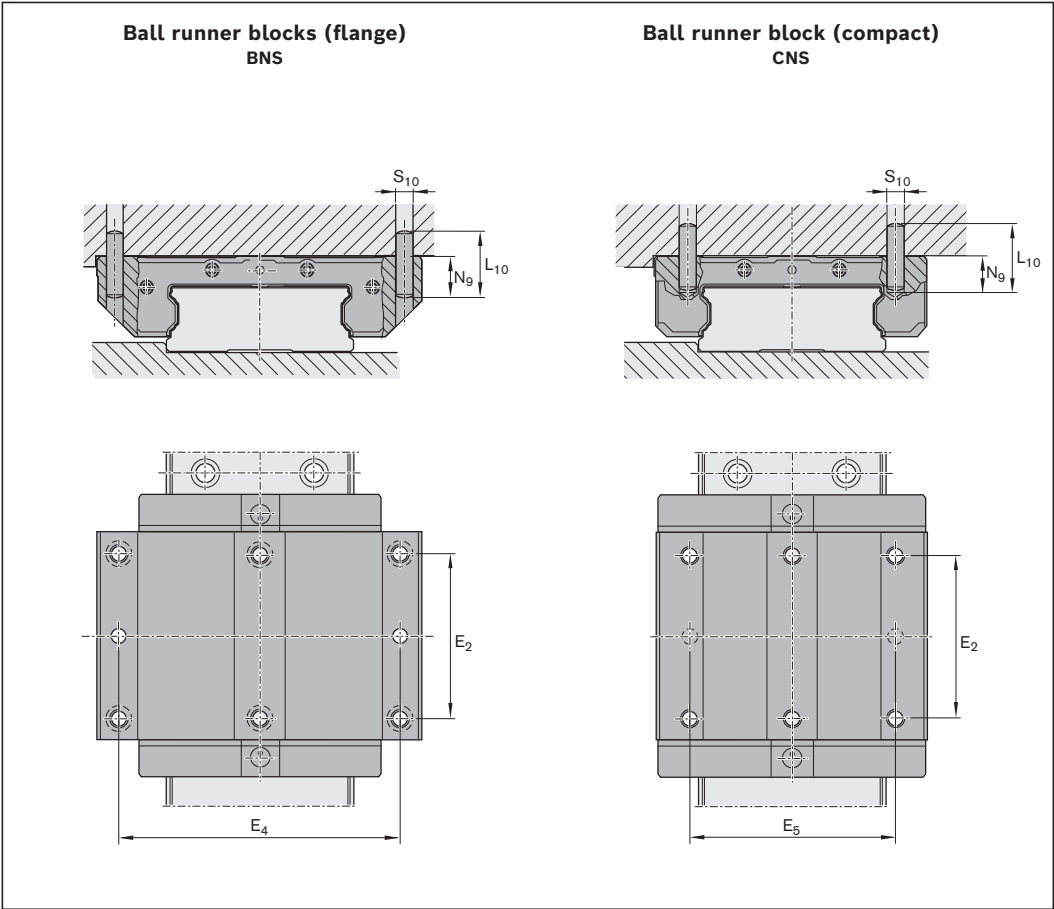

| Size  | Dimensions (mm) |       |               |              |               |
|-------|-----------------|-------|---------------|--------------|---------------|
|       | $E_4$           | $E_5$ | $L_{10}^{1)}$ | $N_{9\ max}$ | $S_{10}^{1)}$ |
| 20/40 | 70              | 46    | 24            | 7            | 5             |
| 25/70 | 107             | 76    | 32            | 8            | 6             |
| 35/90 | 144             | –     | 32            | 8            | 8             |

1) Tapered pin (hardened) or straight pin (DIN ISO 8734)

Note

- ▶ At the recommended positions for pin holes, there may be pre-drilled holes in the middle of the ball runner block due to production-related issues ( $\varnothing < S_{10}$ ). They are suitable for drilling out.
- ▶ If it is necessary to carry out pinning at a different position (e.g. the middle lube connection), dimension  $E_2$  must not be exceeded in the longitudinal direction (for dimension  $E_2$ , refer to the dimension tables of the corresponding ball runner blocks). Comply with dimensions  $E_4$  and  $E_5$ !
- ▶ Do not complete the pin holes until after mounting.
- ▶ Please request the "Mounting instructions for ball rail systems".



# Installation tolerances

## Basic principles

Installation tolerances generate constraining forces. They can lead to increased displacement resistance, heat generation, load on the adjacent construction, reduced accuracy and reduced service life. The same applies to thermal expansions, deformations or subsidence.

The amount of constraining forces largely depends on the rigidity of the guideway and the adjacent construction.

Exact determination is only possible with numerical calculation.


The surrounding structure must be sufficiently rigid to absorb the loads that occur. If the mating surfaces are unstable, the internal constraining forces on the rolling element set and the screw load increase (see DIN 637)

## Principle

The stiffer the guideway and structure, the smaller the permissible tolerances in order to avoid constraining forces.

## Calculation process

If the vertical offsets  $S_1$  and  $S_2$  as well as the parallelism offset  $P_1$  calculated in the following chapter are observed, the impact on the service life can be generally neglected.

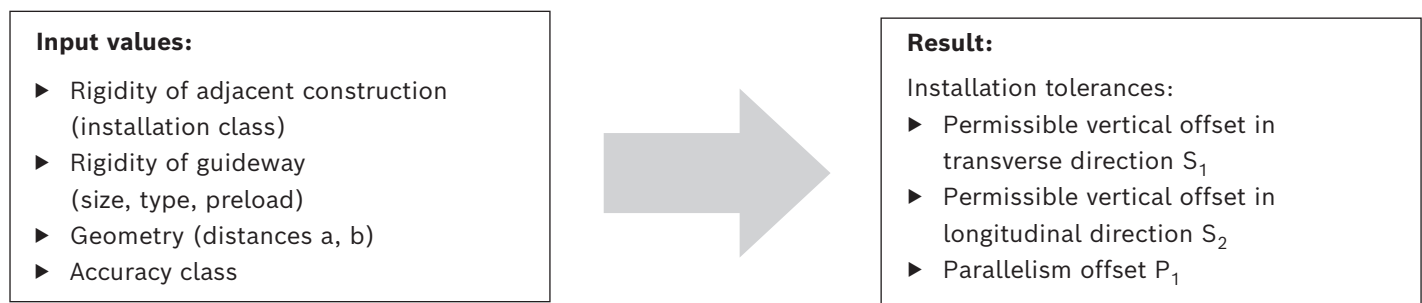

If the tolerances for  $S_1, S_2$  or  $P_1$  are negative or cannot be maintained, the following measures can be taken:

- Selection of higher accuracy classes
- Reduction of the installation class by reducing the rigidity of the connection design
- Increase of runner block spacing a and/or b
- Change in the assembly concept, e.g. by aligning or tuning
- Calculation of service life reduction

## Installation classes

The rigidity of the adjacent construction is taken into account in the installation factor f:


| Installation class | Description                           | Typical accuracy | Installation factor f | Typical industries                                                                      |
|--------------------|---------------------------------------|------------------|-----------------------|-----------------------------------------------------------------------------------------|
| Standard           | Flexible surrounding construction     | N/H/P            | 2.0                   | Automation technology<br>Assembly and handling technology                               |
| Precision          | Rigid surrounding construction        | P/SP             | 1.5                   | Machine tools for cutting, forming and dividing,<br>printing and paper technology       |
| Super precision    | Highly rigid surrounding construction | SP/UP            | 1.0                   | High-precision machine tool for machining,<br>forming and cutting, measuring technology |

## Vertical offset

Permissible vertical offset in transverse direction  $S_1$

$$S_1 = f \cdot a \cdot Y - T_{S1} - T_{S1CR}$$

- a = Centerline-to-centerline distance between ball guide rails [mm]  
 f = Installation factor (installation class) [1]  
 $S_1$  = Permissible vertical offset of the ball guide rails [mm]  
 $T_{S1}$  = Accuracy class tolerance in transverse direction [mm]  
 $T_{S1CR}$  = Reduction for coated guide rails and runner blocks [mm]  
 Standard  $T_{S1CR} = 0$ , with Resist CR see below  
 Y = Calculation factor in transverse direction [1]

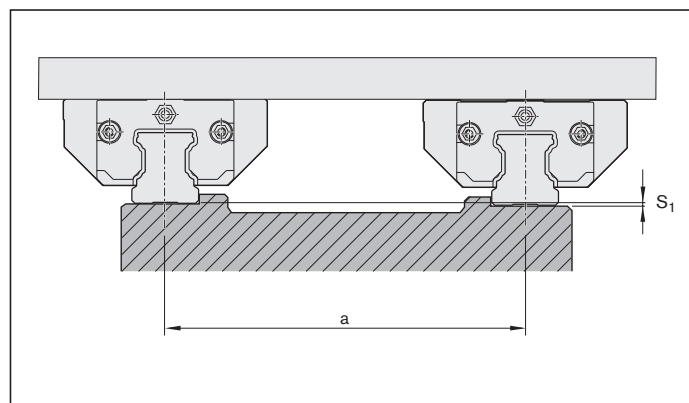

| Calculation factor Y               | for preload class   |                     |                     |                     |
|------------------------------------|---------------------|---------------------|---------------------|---------------------|
|                                    | C0                  | C1                  | C2                  | C3                  |
| Ball runner block made of steel    | $4.3 \cdot 10^{-4}$ | $2.8 \cdot 10^{-4}$ | $1.7 \cdot 10^{-4}$ | $1.2 \cdot 10^{-4}$ |
| Ball runner block made of aluminum | $7.0 \cdot 10^{-4}$ | $5.0 \cdot 10^{-4}$ | -                   | -                   |

With accuracy class tolerance in transverse direction  $T_{S1}$  [mm]:


|                    |    | Ball guide rail |       |       |       |       |
|--------------------|----|-----------------|-------|-------|-------|-------|
|                    |    | N               | H     | P     | SP    | UP    |
| Ball runner blocks | N  | 0.200           | 0.096 | 0.064 |       |       |
|                    | H  | 0.184           | 0.080 | 0.048 | 0.030 |       |
|                    | P  | 0.176           | 0.072 | 0.040 | 0.022 |       |
|                    | XP |                 | 0.072 | 0.040 | 0.022 | 0.014 |
|                    | SP |                 |       | 0.038 | 0.022 | 0.012 |
|                    | UP |                 |       |       | 0.018 | 0.010 |

Installation tolerances

Permissible vertical offset in longitudinal direction  $S_2$

$$S_2 = f \cdot b \cdot X - T_{S2} - T_{S2CR}$$

- $b$  = Centerline-to-centerline distance between ball guide rails [mm]
- $f$  = Installation factor (installation class) [1]
- $S_2$  = Permissible vertical offset of the ball guide rails [mm]
- $T_{S2}$  = Accuracy class tolerance in longitudinal direction [ $\mu\text{m}$ ]
- $T_{S2CR}$  = Reduction for coated guide rails and runner blocks [ $\mu\text{m}$ ];  
Standard  $T_{S2CR} = 0$ , with Resist CR see below
- $X$  = Calculation factor in longitudinal direction [1]

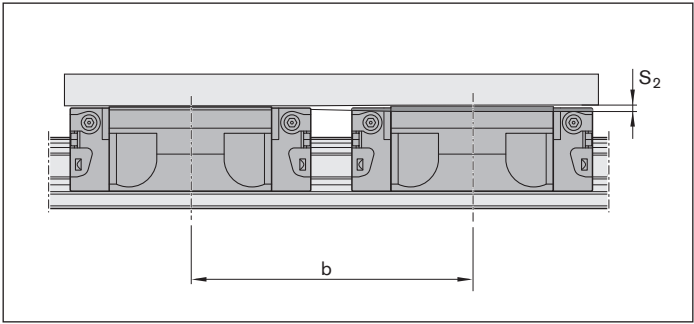

| Calculation factor X               | for ball runner block length |                        |                     |
|------------------------------------|------------------------------|------------------------|---------------------|
|                                    | Short<br>xKx                 | Standard length<br>xNx | Long<br>xLx         |
| Ball runner block made of steel    | $6.0 \cdot 10^{-5}$          | $4.3 \cdot 10^{-5}$    | $3.0 \cdot 10^{-5}$ |
| Ball runner block made of aluminum | -                            | $6.0 \cdot 10^{-5}$    | -                   |


With accuracy class tolerance in longitudinal direction  $T_{S2}$  [mm]:

|                    |    | Ball guide rail |       |       |       |       |
|--------------------|----|-----------------|-------|-------|-------|-------|
|                    |    | N               | H     | P     | SP    | UP    |
| Ball runner blocks | N  | 0.030           | 0.030 | 0.030 |       |       |
|                    | H  | 0.015           | 0.015 | 0.015 | 0.015 |       |
|                    | P  | 0.007           | 0.007 | 0.007 | 0.007 |       |
|                    | XP |                 | 0.007 | 0.007 | 0.007 | 0.007 |
|                    | SP |                 |       | 0.005 | 0.005 | 0.005 |
|                    | UP |                 |       |       | 0.003 | 0.003 |

**Permissible parallelism offset  $P_1$  of guide rails**

$$P_1 = f \cdot P_{pr} - P_{1CR}$$

$f$  = Installation factor (installation class) [1]  
 $P_1$  = Permissible parallelism offset [mm]  
 $P_{1CR}$  = Reduction for coated guide rails and runner blocks [ $\mu\text{m}$ ];  
 Standard  $T_{S2CR} = 0$ , with Resist CR see below  
 $P_{pr}$  = Parallelism offset with preload class [mm]

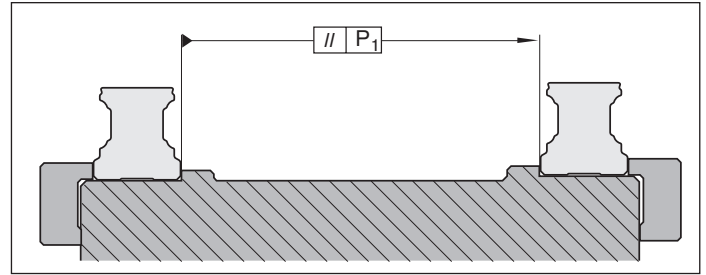

With parallelism offset  $P_{pr}$  [mm]:

| Preload class                      |    | C0    | C1    | C2    | C3    |
|------------------------------------|----|-------|-------|-------|-------|
| Ball runner block made of steel    | 15 | 0.015 | 0.009 | 0.005 | 0.004 |
|                                    | 20 | 0.018 | 0.011 | 0.006 | 0.004 |
|                                    | 25 | 0.019 | 0.012 | 0.007 | 0.005 |
|                                    | 30 | 0.021 | 0.014 | 0.009 | 0.006 |
|                                    | 35 | 0.023 | 0.015 | 0.010 | 0.007 |
|                                    | 45 | 0.028 | 0.019 | 0.012 | 0.009 |
|                                    | 55 | 0.035 | 0.025 | 0.016 | 0.011 |
|                                    | 65 | 0.048 | 0.035 | 0.022 | 0.016 |
| Ball runner block made of aluminum | 15 | 0.021 | 0.014 | -     | -     |
|                                    | 25 | 0.026 | 0.017 | -     | -     |
|                                    | 30 | 0.029 | 0.019 | -     | -     |
|                                    | 35 | 0.035 | 0.022 | -     | -     |

**Super ball runner blocks**

Super ball runner blocks compensate for alignment errors and can therefore accommodate higher tolerances.

|                                                             |                                                                                        |
|-------------------------------------------------------------|----------------------------------------------------------------------------------------|
| Permissible vertical offset in transverse direction $S_1$   | Double values compared to Y for ball runner blocks made of steel                       |
| Permissible vertical offset in longitudinal direction $S_2$ | $X = 2.9 \cdot 10^{-3}$ (resulting from permissible tilt angle $10'$ per runner block) |
| Permissible parallelism offset $P_1$                        | Double values compared to $P_1$ for ball runner blocks made of steel                   |

**Chrome-plated guide rails and runner blocks Resist CR**


Due to the coating process, rail and runner block have higher tolerances. If at least one of the two elements is coated, the installation tolerances on the customer side are reduced and the following factors must be taken into account in the above formulae:

|                                                             |                               |
|-------------------------------------------------------------|-------------------------------|
| Permissible vertical offset in transverse direction $S_1$   | $T_{S1CR} = 0.005 \text{ mm}$ |
| Permissible vertical offset in longitudinal direction $S_2$ | $T_{S2CR} = 0.003 \text{ mm}$ |
| Permissible parallelism offset $P_1$                        | $P_{1CR} = 0.002 \text{ mm}$  |

# Composite ball guide rails

## Notes on ball guide rails

- ▶ Matching partial sections of a composite ball guide rail are identified as such by a label on the packaging. All partial sections of the same rail have the same serial rail number.
- ▶ The numbering is marked on the top of the ball guide rail.

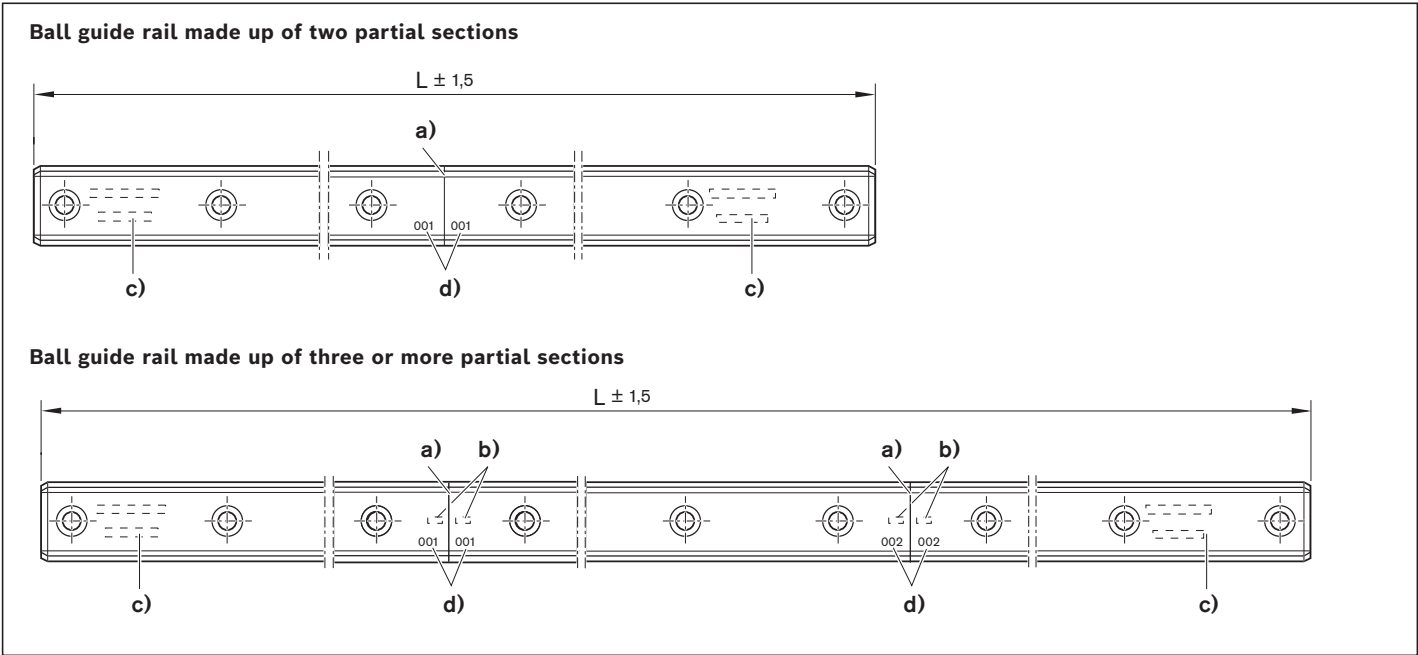

L = Rail length (mm)  
n<sub>B</sub> = Number of holes (-)

- a) Joint
- b) Rail number
- c) Full rail identification on first and last sections
- d) Joint identification number

## Note on cover strip

- ▶ For composite ball guide rails, a one-piece cover strip to cover the overall length L is supplied separately.
- ▶ Secure the cover strip!

## Note on adjacent structures

Permissible fastening bore tolerances for adjacent structures

| Size    | Hole position tolerance (mm) |
|---------|------------------------------|
| 15 - 35 | ∅ 0.2                        |
| 45 - 65 | ∅ 0.3                        |

For composite ball guide rails, the actual tolerances of the individual sections may sum up. In such case, the fastening bore holes in the connecting structure may lie outside of the tolerances and a rework of the connecting structure may be required.





## Notes on lubrication

- ▶ All specifications on lubrication are based on experimental values and field experience are recommendations by Bosch Rexroth.
- ▶ The service life of the ball rail system crucially depends on the lubrication. For this purpose, the documentation, especially the chapter on lubrication, must be read and understood completely.
- ▶ The operator is responsible for the selection and supply of the ball rail system with sufficient and suitable lubricant. These notes do not exempt the operator from the individual examination of the conformity and suitability of the lubricant for its application.
- ▶ For recommended lubricants, see chapter "Notes on Dynalub".

⚠ To safeguard the supply of lubricant, the lube fittings from the chapter "Accessories" must be used. When using other lube fittings it must be ensured that they are identical to Rexroth lube fittings.

⚠ If using a progressive lubrication system, with grease lubrication, please pay attention to the minimum dosing amount for relubrication stated in table 9.

⚠ We recommend carrying out initial lubrication separately using a grease gun before connecting to the central lubrication system.

If using a central lubrication system, you must make sure that all the pipes and elements are filled with lubricant and do not contain any air pockets until they are connected to the consumer (ball runner block). The number of pulses results from the partial amounts and the piston distributor size.

▶ **With fluid grease lubrication according to table 9**

▶ **With oil lubrication according to table 14**

⚠ **The seals on the ball runner block must be oiled or lubricated with the respective lubricant before mounting.**

⚠ If you use different lubricants than the ones specified, relubrication intervals may be shorter and performance may decrease with short stroke and load ratio; in addition, chemical interactions can take place between the plastics, lubricants and preservative agents. Single-line central lubrication systems also need to be able to pump these lubricants.

⚠ Lubricant reservoirs should contain an agitator to ensure the lubricant can flow (avoids hardening in the reservoir).

⚠ Do not use lubricants with solid particles (e.g. graphite or MoS<sub>2</sub>)!

⚠ With basic lubrication at the factory, both grease and oil lubrication is possible. In the case of relubrication, it is not possible to change from grease to oil lubrication, as the lubrication channels are already filled with grease and are therefore impermeable to oil.

⚠ Ball runner blocks without factory basic lubrication must be lubricated before commissioning.

⚠ When applying metalworking fluids at the start or after a relatively long standstill, carry out 2 to 5 lubrication pulses in succession. When the system is in operation, the guideline value is 3 to 4 pulses per hour, irrespective of the distance traveled. If possible, carry out lubrication in one lubricating stroke. Carry out cleaning cycles (see "Maintenance").

⚠ An unfavorable selection of coolant/lubricant may lead to damage to the ball rail system. We recommend getting in touch with the manufacturer of the coolant/lubricant. Bosch Rexroth accepts no liability. Lubricant and metalworking fluids must be coordinated.

⚠ If environmental factors such as contamination, vibrations, impact loads, etc. are present, we recommend shorter relubrication intervals. Even under normal operating conditions, relubrication is required every 2 years due to grease aging.

- ▶ If your application involves more demanding environmental requirements (such as clean room, vacuum, food industry applications, increased exposure to fluids or aggressive media, extreme temperatures), please consult us. In this case, a separate check and possibly an alternative lubricant selection is necessary. Special requirements require special seals and wipers (see chapter "Accessories ball runner block"). Be sure to have all the information concerning your application at hand when contacting us. Pay attention to the chapter "Maintenance".
- ▶ Rexroth recommends piston distributors by SKF. These should be installed as close as possible to the lube fittings of the ball runner blocks. Long lines and small line diameters should be avoided, and the lines should be laid on an upward slant. Install the lines at a gradient.
- ▶ Refer to the chapter entitled "Ball runner block accessories" for a selection of possible lube ports (in this connection, contact the manufacturer of your lubrication system too).
- ▶ If other consumers are connected to the single-line lubrication system, the weakest link in this chain determines the lubrication cycle.

## Notes on Dynalub

(Approved for EU countries only; not approved outside of the EU)

**!** Pay attention to the allocation of the ball rail system.

Under conventional environmental conditions, this short-fibred, homogeneous grease is ideally suited for the lubrication of linear elements:

- ▶ With loads up to 50% C
- ▶ With short-stroke applications > 1 mm
- ▶ For the permissible speed range of ball rail systems

The product and material safety data sheet can be found on our website at: [www.boschrexroth.com](http://www.boschrexroth.com).

### Dynalub 510

#### Grease lubricant

Features:

- ▶ Lithium-based, high-performance grease of grade NLGI 2 according to DIN 51818 (KP2K-20 according to DIN 51825)
- ▶ Good water resistance
- ▶ Corrosion protection
- ▶ Temperature range: -20 to +80 °C

Material numbers for Dynalub 510:

- ▶ R3416 037 00 (cartridge 400 g)
- ▶ R3416 035 00 (hobcock 25 kg)

#### Alternative greases:

- ▶ Castrol Tribol GR 100-2 PD\*) or Elkalub GLS 135/N2\*).

### Dynalub 520

#### Liquid grease

Features:

- ▶ Lithium-based, high-performance grease of grade NLGI 00 according to DIN 51818 (GP00K-20 according to DIN 51826)
- ▶ Good water resistance
- ▶ Corrosion protection
- ▶ Temperature range: -20 to +80 °C

Material numbers for Dynalub 520:

- ▶ R3416 043 00 (cartridge 400 g)
- ▶ R3416 042 00 (bucket 5 kg)

#### Alternative greases:

- ▶ Castrol Tribol GR 100-00 PD\*) or Elkalub GLS 135/N00\*)

## Notes on lubricant oil

We recommend **Shell Tonna S3 M 220** \*) or similar products with the following properties:

- ▶ Special demulsifying oil CLP or CGLP as per DIN 51517-3 for machine bed tracks and tool guides
- ▶ A blend of highly refined mineral base oils and additives. Can be used even when mixed with significant quantities of metalworking fluids

\*) No liability is accepted for changes to the product properties of these lubricants.

# Lubrication

## Grease lubrication with grease guns or progressive lubrication systems

### Observe chapter "Note on lubrication"

Grease lubricant: We recommend using **Dynalub 510**. For further information, please refer to chapter "Note on lubrication".

### Never put ball runner blocks into operation without basic lubrication. No initial lubrication is required if pre-lubricated at the factory. Rexroth ball rail systems are supplied with preservation.

#### Initial lubrication of the ball runner blocks (basic lubrication)

##### Stroke $\geq 2 \cdot$ ball runner block length $B_1$ (normal stroke)

- One lube connection per ball runner block, attach optionally on the left **or** right ball guide and lubricate!

The initial lubrication is done three times with the partial amount according to table 1:

1. Pre-lubricate the ball runner block with an initial partial amount according to table 1 by slowly applying pressure to the grease gun.
2. Move ball runner blocks with three double strokes of  $3 \cdot$  ball runner block length  $B_1$ .
3. Repeat steps 1 and 2 twice.
4. Check whether a film of grease is visible on the ball guide rail.

##### Stroke $< 2 \cdot$ ball runner block length $B_1$ (short stroke)

- Two lube connections per ball runner block, attach one connection on the left **and** right ball guide and lubricate!

The initial lubrication is done three times for each connection with the partial amounts according to table 2:

1. Lubricate the ball runner block for each connection with an initial partial amount according to table 2 by slowly applying pressure to the grease gun.
2. Move ball runner blocks with three double strokes of  $3 \cdot$  ball runner block length  $B_1$ .
3. Repeat steps 1 and 2 twice.
4. Check whether a film of grease is visible on the ball guide rail.

| Size                 | Initial lubrication (normal stroke)<br>Material numbers (not exhaustive) |                                 |                                                        |                                                 |                                 |
|----------------------|--------------------------------------------------------------------------|---------------------------------|--------------------------------------------------------|-------------------------------------------------|---------------------------------|
|                      | (no initial lubrication)                                                 |                                 | (with initial lubrication)                             |                                                 |                                 |
|                      | R16.. ... 10                                                             | R20.. ... 04/0Z                 | R16.. ... 20/2Z                                        | R20.. ... 30/3Z                                 | R16.. ... 70/7Z                 |
|                      | R16.. ... 11                                                             | R20.. ... 05                    | R16.. ... 21                                           | R20.. ... 31                                    | R16.. ... 71                    |
|                      | R16.. ... 60                                                             | R20.. ... 06/0Y<br>R20.. ... 07 | R16.. ... 22/2Y<br>R16.. ... 23                        | R20.. ... 32/3Y<br>R20.. ... 33<br>R20.. ... 90 | R16.. ... 72/7Y<br>R16.. ... 73 |
| Partial amount (cm³) |                                                                          |                                 |                                                        |                                                 |                                 |
| 15                   | 0.4 (3x)                                                                 |                                 | Initial lubrication in the factory with<br>Dynalub 510 |                                                 |                                 |
| 20                   | 0.7 (3x)                                                                 |                                 |                                                        |                                                 |                                 |
| 25                   | 1.4 (3x)                                                                 |                                 |                                                        |                                                 |                                 |
| 30                   | 2.2 (3x)                                                                 |                                 |                                                        |                                                 |                                 |
| 35                   | 2.2 (3x)                                                                 |                                 |                                                        |                                                 |                                 |
| 45                   | –                                                                        |                                 | –                                                      |                                                 |                                 |
| 55                   | 9.4 (3x)                                                                 |                                 |                                                        |                                                 |                                 |
| 65                   | 15.4 (3x)                                                                |                                 |                                                        |                                                 |                                 |
| 20/40                | –                                                                        |                                 | Initial lubrication in the factory with<br>Dynalub 510 |                                                 |                                 |
| 25/70                |                                                                          |                                 |                                                        |                                                 |                                 |
| 35/90                | 2.7 (3x)                                                                 |                                 | –                                                      |                                                 |                                 |

Table 1

| Size  | Initial lubrication (short stroke)           |                                                                    |                                                                    |                                                                                    |                                                                    |
|-------|----------------------------------------------|--------------------------------------------------------------------|--------------------------------------------------------------------|------------------------------------------------------------------------------------|--------------------------------------------------------------------|
|       | Material numbers (not exhaustive)            |                                                                    |                                                                    |                                                                                    |                                                                    |
|       | (no initial lubrication)                     |                                                                    | (with initial lubrication)                                         |                                                                                    |                                                                    |
|       | R16.. ... 10<br>R16.. ... 11<br>R16.. ... 60 | R20.. ... 04/0Z<br>R20.. ... 05<br>R20.. ... 06/0Y<br>R20.. ... 07 | R16.. ... 20/2Z<br>R16.. ... 21<br>R16.. ... 22/2Y<br>R16.. ... 23 | R20.. ... 30/3Z<br>R20.. ... 31<br>R20.. ... 32/3Y<br>R20.. ... 33<br>R20.. ... 90 | R16.. ... 70/7Z<br>R16.. ... 71<br>R16.. ... 72/7Y<br>R16.. ... 73 |
|       | left                                         | right                                                              |                                                                    |                                                                                    |                                                                    |
| 15    | 0.4 (3x)                                     | 0.4 (3x)                                                           | Initial lubrication in the factory with<br>Dynalub 510             |                                                                                    |                                                                    |
| 20    | 0.7 (3x)                                     | 0.7 (3x)                                                           |                                                                    |                                                                                    |                                                                    |
| 25    | 1.4 (3x)                                     | 1.4 (3x)                                                           |                                                                    |                                                                                    |                                                                    |
| 30    | 2.2 (3x)                                     | 2.2 (3x)                                                           |                                                                    |                                                                                    |                                                                    |
| 35    | 2.2 (3x)                                     | 2.2 (3x)                                                           |                                                                    |                                                                                    |                                                                    |
| 45    | –                                            |                                                                    | –                                                                  |                                                                                    |                                                                    |
| 55    | 9.4 (3x)                                     | 9.4 (3x)                                                           |                                                                    |                                                                                    |                                                                    |
| 65    | 15.4 (3x)                                    | 15.4 (3x)                                                          |                                                                    |                                                                                    |                                                                    |
| 20/40 | –                                            |                                                                    | Initial lubrication in the factory with<br>Dynalub 510             |                                                                                    |                                                                    |
| 25/70 |                                              |                                                                    |                                                                    |                                                                                    |                                                                    |
| 35/90 | 2.7 (3x)                                     | 2.7 (3x)                                                           | –                                                                  |                                                                                    |                                                                    |

Table 2

**Grease lubrication with grease guns or progressive lubrication systems (continued)****Relubrication of the ball runner blocks****Stroke  $\geq 2 \cdot$  ball runner block length  $B_1$  (normal stroke)**

- When the relubrication interval in accordance with diagram 1 or 2  216 is reached, apply the relubrication quantity according to table 3.

| Size  | Relubrication (normal stroke)     |                 |                 |                      |                 |  |
|-------|-----------------------------------|-----------------|-----------------|----------------------|-----------------|--|
|       | Material numbers (not exhaustive) |                 |                 |                      |                 |  |
|       | R16.. ... 10                      | R20.. ... 04/0Z | R16.. ... 20/2Z | R20.. ... 30/3Z      | R16.. ... 70/7Z |  |
|       | R16.. ... 11                      | R20.. ... 05    | R16.. ... 21    | R20.. ... 31         | R16.. ... 71    |  |
|       | R16.. ... 60                      | R20.. ... 06/0Y | R16.. ... 22/2Y | R20.. ... 32/3Y      | R16.. ... 72/7Y |  |
|       |                                   | R20.. ... 07    | R16.. ... 23    | R20.. ... 33         | R16.. ... 73    |  |
|       |                                   |                 | R20.. ... 90    |                      |                 |  |
|       | Partial amount (cm³)              |                 |                 | Partial amount (cm³) |                 |  |
| 15    | 0.4 (1x)                          |                 |                 | 0.4 (2x)             |                 |  |
| 20    | 0.7 (1x)                          |                 |                 | 0.7 (2x)             |                 |  |
| 25    | 1.4 (1x)                          |                 |                 | 1.4 (2x)             |                 |  |
| 30    | 2.2 (1x)                          |                 |                 | 2.2 (2x)             |                 |  |
| 35    | 2.2 (1x)                          |                 |                 | 2.2 (2x)             |                 |  |
| 45    | –                                 |                 |                 | 4.7 (2x)             |                 |  |
| 55    | 9.4 (1x)                          |                 |                 | –                    |                 |  |
| 65    | 15.4 (1x)                         |                 |                 |                      |                 |  |
| 20/40 | –                                 |                 |                 | 1.0 (2x)             |                 |  |
| 25/70 |                                   |                 |                 | 1.4 (2x)             |                 |  |
| 35/90 | 2.7 (1x)                          |                 |                 | –                    |                 |  |

Table 3

**Stroke  $< 2 \cdot$  ball runner block length  $B_1$  (short stroke)**

- When the relubrication interval according to diagram 1 or 2  216 is reached, apply the relubrication quantity according to table 4 **per** lube connection.
- For each lubrication cycle, the ball runner block should be moved with a double stroke of 3 ball runner block length  $B_1$ ; as minimum stroke, however, ball runner block length  $B_1$  should be moved.

| Size         | Relubrication (short stroke)                     |                 |                 |                                                  |                 |  |
|--------------|--------------------------------------------------|-----------------|-----------------|--------------------------------------------------|-----------------|--|
|              | Material numbers (not exhaustive)                |                 |                 |                                                  |                 |  |
|              | R16.. ... 10                                     | R20.. ... 04/0Z | R16.. ... 20/2Z | R20.. ... 30/3Z                                  | R16.. ... 70/7Z |  |
|              | R16.. ... 11                                     | R20.. ... 05    | R16.. ... 21    | R20.. ... 31                                     | R16.. ... 71    |  |
|              | R16.. ... 60                                     | R20.. ... 06/0Y | R16.. ... 22/2Y | R20.. ... 32/3Y                                  | R16.. ... 72/7Y |  |
|              |                                                  | R20.. ... 07    | R16.. ... 23    | R20.. ... 33                                     | R16.. ... 73    |  |
|              |                                                  |                 |                 | R20.. ... 90                                     |                 |  |
|              | Partial amount per connection (cm <sup>3</sup> ) |                 |                 | Partial amount per connection (cm <sup>3</sup> ) |                 |  |
|              | left                                             | right           |                 | left                                             | right           |  |
| <b>15</b>    | 0.4 (1x)                                         | 0.4 (1x)        |                 | 0.4 (2x)                                         | 0.4 (2x)        |  |
| <b>20</b>    | 0.7 (1x)                                         | 0.7 (1x)        |                 | 0.7 (2x)                                         | 0.7 (2x)        |  |
| <b>25</b>    | 1.4 (1x)                                         | 1.4 (1x)        |                 | 1.4 (2x)                                         | 1.4 (2x)        |  |
| <b>30</b>    | 2.2 (1x)                                         | 2.2 (1x)        |                 | 2.2 (2x)                                         | 2.2 (2x)        |  |
| <b>35</b>    | 2.2 (1x)                                         | 2.2 (1x)        |                 | 2.2 (2x)                                         | 2.2 (2x)        |  |
| <b>45</b>    | –                                                |                 |                 | 4.7 (2x)                                         | 4.7 (2x)        |  |
| <b>55</b>    | 9.4 (1x)                                         | 9.4 (1x)        |                 | –                                                |                 |  |
| <b>65</b>    | 15.4 (1x)                                        | 15.4 (1x)       |                 |                                                  |                 |  |
| <b>20/40</b> | –                                                |                 |                 | 1.0 (2x)                                         | 1.0 (2x)        |  |
| <b>25/70</b> |                                                  |                 |                 | 1.4 (2x)                                         | 1.4 (2x)        |  |
| <b>35/90</b> | 2.7 (1x)                                         | 2.7 (1x)        |                 | –                                                |                 |  |

Table 4

# Lubrication

## Grease lubrication with grease guns or progressive lubrication systems (continued)

### Load-dependent relubrication intervals

#### This applies to the following conditions:

- ▶ Dynalub 510 grease or Castrol Tribol GR 100-2 PD or Elkalube GLS 135/N2
- ▶ No media pressurization
- ▶ Standard seals (SS)
- ▶ Ambient temperature:  
 $T = 10 - 40\text{ °C}$

#### Key

- C = Dynamic load capacity (N)
- $F_m$  = Dynamically equivalent load on bearing (N)
- $F_m/C$  = Load ratio (-)
- s = Lubrication interval as travel distance (km)

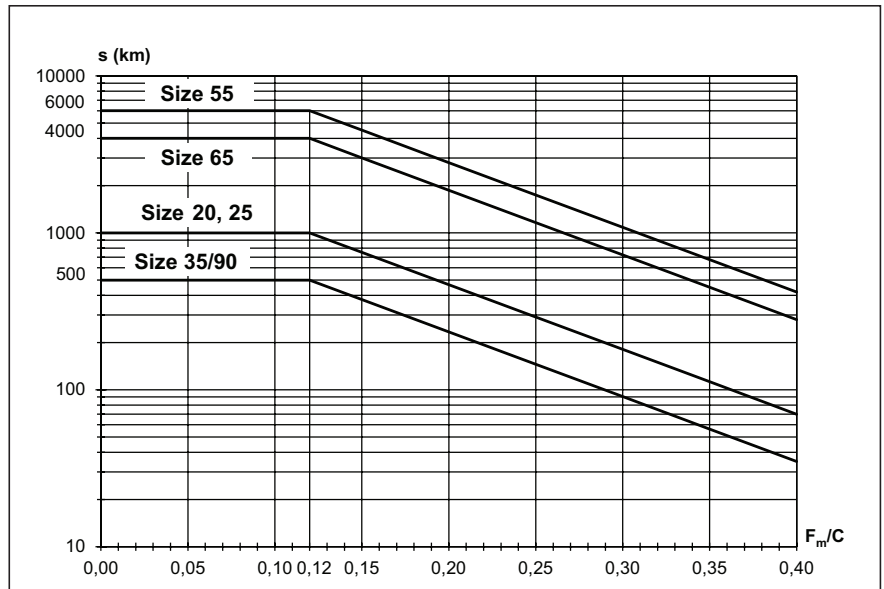


Diagram 1

#### Material number

|              |              |              |
|--------------|--------------|--------------|
| R16.. ... 10 | R16.. ... 11 | R16.. ... 60 |
|--------------|--------------|--------------|

### For relubrication intervals, please consult us:

- ▶ In case of exposure to cooling lubricants
- ▶ In case of exposure to dust (wood, paper,...)
- ▶ With use of a double-lip seal (DS)
- ▶ With standard seal (SS) in combination with front seal or FKM seal or seal kit
- ▶ At low mean travel speed  $v_m$
- ▶ at a raised ambient temperature
- ▶ At high loads  $F_m/C > 0.4$

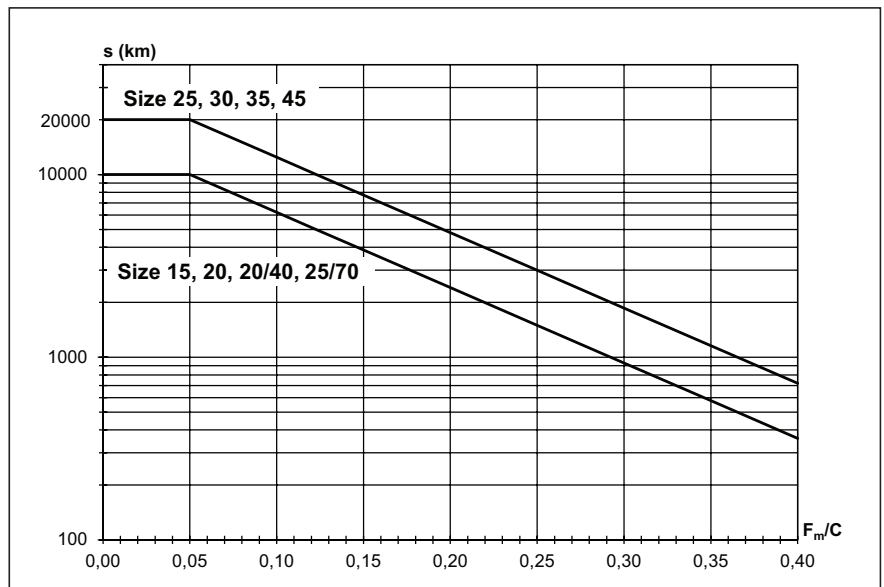


Diagram 2

#### Material number

|              |              |              |              |              |
|--------------|--------------|--------------|--------------|--------------|
| R20.. ... 04 | R16.. ... 20 | R20.. ... 30 | R16.. ... 70 | R20.. ... 90 |
| R20.. ... 05 | R16.. ... 21 | R20.. ... 31 | R16.. ... 71 |              |
| R20.. ... 06 | R16.. ... 22 | R20.. ... 32 | R16.. ... 72 |              |
| R20.. ... 07 | R16.. ... 23 | R20.. ... 33 | R16.. ... 73 |              |

**!** Pay attention to the notes on lubrication!

## Liquid grease lubrication with single-line piston distributor systems

⚠ Observe chapter "Note on lubrication"

Grease lubricant: We recommend using **Dynalub 520**. For further information, please refer to chapter "Note on lubrication".

⚠ Never put ball runner blocks into operation without basic lubrication. No initial lubrication is required if pre-lubricated at the factory. Rexroth ball rail systems are supplied with preservation.

### Initial lubrication of the ball runner blocks (basic lubrication)

#### Stroke $\geq 2 \cdot$ ball runner block length $B_1$ (normal stroke)

- One lube connection per ball runner block, attach optionally on the left **or** right ball guide and lubricate!

The initial lubrication is done three times with the partial amounts according to table 5:

1. Lubricate the ball runner block with an initial partial amount according to table 5 by slowly applying pressure to the grease gun.
2. Move ball runner blocks with three double strokes of  $3 \cdot$  ball runner block length  $B_1$ .
3. Repeat steps 1 and 2 twice.
4. Check whether a film of grease is visible on the ball guide rail.

#### Stroke $< 2 \cdot$ ball runner block length $B_1$ (short stroke)

- Two lube connections per ball runner block, attach one connection on the left **and** right ball guide and lubricate!

The initial lubrication is done three times for each connection with the partial amounts according to table 6:

1. Lubricate the ball runner block for each connection with an initial partial amount according to table 6 by slowly applying pressure to the grease gun.
2. Move ball runner blocks with three double strokes of  $3 \cdot$  ball runner block length  $B_1$ .
3. Repeat steps 1 and 2 twice.
4. Check whether a film of grease is visible on the ball guide rail.

| Size  | Initial lubrication (normal stroke)<br>Material numbers (not exhaustive) |                 |                            |                 |                 |
|-------|--------------------------------------------------------------------------|-----------------|----------------------------|-----------------|-----------------|
|       | (no initial lubrication)                                                 |                 | (with initial lubrication) |                 |                 |
|       | R16.. ... 10                                                             | R20.. ... 04/0Z | R16.. ... 20/2Z            | R20.. ... 30/3Z | R16.. ... 70/7Z |
|       | R16.. ... 11                                                             | R20.. ... 05    | R16.. ... 21               | R20.. ... 31    | R16.. ... 71    |
|       | R16.. ... 60                                                             | R20.. ... 06/0Y | R16.. ... 22/2Y            | R20.. ... 32/3Y | R16.. ... 72/7Y |
|       |                                                                          | R20.. ... 07    | R16.. ... 23               | R20.. ... 33    | R16.. ... 73    |
|       |                                                                          |                 | R20.. ... 90               |                 |                 |
|       | Partial amount (cm <sup>3</sup> )                                        |                 |                            |                 |                 |
| 15    | 0.4 (3x)                                                                 |                 |                            |                 |                 |
| 20    | 0.7 (3x)                                                                 |                 |                            |                 |                 |
| 25    | 1.4 (3x)                                                                 |                 |                            |                 |                 |
| 30    | 2.2 (3x)                                                                 |                 |                            |                 |                 |
| 35    | 2.2 (3x)                                                                 |                 |                            |                 |                 |
| 45    | –                                                                        |                 |                            |                 |                 |
| 55    | 9.4 (3x)                                                                 |                 |                            |                 |                 |
| 65    | 15.4 (3x)                                                                |                 |                            |                 |                 |
| 20/40 | –                                                                        |                 |                            |                 |                 |
| 25/70 | –                                                                        |                 |                            |                 |                 |
| 35/90 | 2.7 (3x)                                                                 |                 |                            |                 |                 |

Table 5

| Size  | Initial lubrication (short stroke)<br>Material numbers (not exhaustive) |                 |                                                        |                              |                 |
|-------|-------------------------------------------------------------------------|-----------------|--------------------------------------------------------|------------------------------|-----------------|
|       | (no initial lubrication)                                                |                 | (with initial lubrication)                             |                              |                 |
|       | R16.. ... 10                                                            | R20.. ... 04/0Z | R16.. ... 20/2Z                                        | R20.. ... 30/3Z              | R16.. ... 70/7Z |
|       | R16.. ... 11                                                            | R20.. ... 05    | R16.. ... 21                                           | R20.. ... 31                 | R16.. ... 71    |
|       | R16.. ... 60                                                            | R20.. ... 06/0Y | R16.. ... 22/2Y                                        | R20.. ... 32/3Y              | R16.. ... 72/7Y |
|       |                                                                         | R20.. ... 07    | R16.. ... 23                                           | R20.. ... 33<br>R20.. ... 90 | R16.. ... 73    |
|       | Partial amount per connection (cm³)                                     |                 |                                                        |                              |                 |
|       | left                                                                    | right           |                                                        |                              |                 |
| 15    | 0.4 (3x)                                                                | 0.4 (3x)        | Initial lubrication in the factory with<br>Dynalub 510 |                              |                 |
| 20    | 0.7 (3x)                                                                | 0.7 (3x)        |                                                        |                              |                 |
| 25    | 1.4 (3x)                                                                | 1.4 (3x)        |                                                        |                              |                 |
| 30    | 2.2 (3x)                                                                | 2.2 (3x)        |                                                        |                              |                 |
| 35    | 2.2 (3x)                                                                | 2.2 (3x)        |                                                        |                              |                 |
| 45    | –                                                                       |                 | –                                                      |                              |                 |
| 55    | 9.4 (3x)                                                                | 9.4 (3x)        |                                                        |                              |                 |
| 65    | 15.4 (3x)                                                               | 15.4 (3x)       |                                                        |                              |                 |
| 20/40 | –                                                                       |                 | Initial lubrication in the factory with<br>Dynalub 510 |                              |                 |
| 25/70 |                                                                         |                 |                                                        |                              |                 |
| 35/90 | 2.7 (3x)                                                                | 2.7 (3x)        | –                                                      |                              |                 |

Table 6

# Lubrication

## Liquid grease lubrication with single-line piston distributor systems (continued)

### Relubrication of the ball runner blocks

#### Stroke $\geq 2 \cdot$ ball runner block length $B_1$ (normal stroke)

- If the relubrication interval according to diagram 3 or 4 has been reached, relubricate the amount stated in table 7.

#### Note

The number of pulses required for this purpose is the integer quotient of the minimum relubrication amount as per table 7 and the smallest permissible piston distributor size ( $\hat{=}$  minimum pulse quantity) according to table 9. The smallest permissible piston distributor size also depends on the installation position.

The lubricating cycle time is the result of dividing the lubrication interval by the determined pulse count (see configuration example).

| Size                 | Relubrication (normal stroke)     |                 |                      |                              |                 |
|----------------------|-----------------------------------|-----------------|----------------------|------------------------------|-----------------|
|                      | Material numbers (not exhaustive) |                 |                      |                              |                 |
|                      | R16.. ... 10                      | R20.. ... 04/0Z | R16.. ... 20/2Z      | R20.. ... 30/3Z              | R16.. ... 70/7Z |
|                      | R16.. ... 11                      | R20.. ... 05    | R16.. ... 21         | R20.. ... 31                 | R16.. ... 71    |
|                      | R16.. ... 60                      | R20.. ... 06/0Y | R16.. ... 22/2Y      | R20.. ... 32/3Y              | R16.. ... 72/7Y |
|                      |                                   | R20.. ... 07    | R16.. ... 23         | R20.. ... 33<br>R20.. ... 90 | R16.. ... 73    |
| Partial amount (cm³) |                                   |                 | Partial amount (cm³) |                              |                 |
| 15                   | 0.4 (1x)                          |                 |                      | 0.4 (2x)                     |                 |
| 20                   | 0.7 (1x)                          |                 |                      | 0.7 (2x)                     |                 |
| 25                   | 1.4 (1x)                          |                 |                      | 1.4 (2x)                     |                 |
| 30                   | 2.2 (1x)                          |                 |                      | 2.2 (2x)                     |                 |
| 35                   | 2.2 (1x)                          |                 |                      | 2.2 (2x)                     |                 |
| 45                   | –                                 |                 |                      | 4.7 (2x)                     |                 |
| 55                   | 9.4 (1x)                          |                 |                      | –                            |                 |
| 65                   | 15.4 (1x)                         |                 |                      |                              |                 |
| 20/40                | –                                 |                 |                      | 1.0 (2x)                     |                 |
| 25/70                |                                   |                 |                      | 1.4 (2x)                     |                 |
| 35/90                | 2.7 (1x)                          |                 |                      | –                            |                 |

Table 7

#### Stroke $< 2 \cdot$ ball runner block length $B_1$ (short stroke)

- When the relubrication interval according to diagram 3 or 4 is reached, apply the relubrication quantity according to table 8 **per** lube connection.
- The number of pulses required and the lubrication cycle are to be determined in a similar way as the relubrication (normal stroke).
- For each lubrication cycle, the ball runner block should be moved with a double stroke of 3 ball runner block length  $B_1$ ; as minimum stroke, however, ball runner block length  $B_1$  should be moved.

| Size  | Relubrication (short stroke)                     |                 |                                                  |                 |
|-------|--------------------------------------------------|-----------------|--------------------------------------------------|-----------------|
|       | Material numbers (not exhaustive)                |                 |                                                  |                 |
|       | R16.. ... 10                                     | R20.. ... 04/0Z | R16.. ... 20/2Z                                  | R20.. ... 30/3Z |
|       | R16.. ... 11                                     | R20.. ... 05    | R16.. ... 21                                     | R20.. ... 31    |
|       | R16.. ... 60                                     | R20.. ... 06/0Y | R16.. ... 22/2Y                                  | R20.. ... 32/3Y |
|       |                                                  | R20.. ... 07    | R16.. ... 23                                     | R20.. ... 33    |
|       |                                                  |                 |                                                  | R20.. ... 90    |
|       | Partial amount per connection (cm <sup>3</sup> ) |                 | Partial amount per connection (cm <sup>3</sup> ) |                 |
|       | left                                             | right           | left                                             | right           |
| 15    | 0.4 (1x)                                         | 0.4 (1x)        | 0.4 (2x)                                         | 0.4 (2x)        |
| 20    | 0.7 (1x)                                         | 0.7 (1x)        | 0.7 (2x)                                         | 0.7 (2x)        |
| 25    | 1.4 (1x)                                         | 1.4 (1x)        | 1.4 (2x)                                         | 1.4 (2x)        |
| 30    | 2.2 (1x)                                         | 2.2 (1x)        | 2.2 (2x)                                         | 2.2 (2x)        |
| 35    | 2.2 (1x)                                         | 2.2 (1x)        | 2.2 (2x)                                         | 2.2 (2x)        |
| 45    | –                                                |                 | 4.7 (2x)                                         | 4.7 (2x)        |
| 55    | 9.4 (1x)                                         | 9.4 (1x)        | –                                                |                 |
| 65    | 15.4 (1x)                                        | 15.4 (1x)       |                                                  |                 |
| 20/40 | –                                                |                 | 1.0 (2x)                                         | 1.0 (2x)        |
| 25/70 |                                                  |                 | 1.4 (2x)                                         | 1.4 (2x)        |
| 35/90 | 2.7 (1x)                                         | 2.7 (1x)        | –                                                |                 |

Table 8

**!** Pay attention to the notes on lubrication!



## Liquid grease lubrication with single-line piston distributor systems (continued)

### Load-dependent relubrication intervals

#### This applies to the following conditions:

- ▶ Liquid grease Dynalub 520, alternatively Castrol Tribol GR 100-00 PD or Elkalub GLS 135/N00
- ▶ No media pressurization
- ▶ Standard seals (SS)
- ▶ Ambient temperature:  
 $T = 10 - 40\text{ }^{\circ}\text{C}$

#### Key

|         |                                           |      |
|---------|-------------------------------------------|------|
| C       | = Dynamic load capacity                   | (N)  |
| $F_m$   | = Dynamically equivalent load on bearing  | (N)  |
| $F_m/C$ | = Load ratio                              | (-)  |
| s       | = Lubrication interval as travel distance | (km) |

#### For relubrication intervals, please consult us:

- ▶ In case of exposure to cooling lubricants
- ▶ In case of exposure to dust (wood, paper,...)
- ▶ With use of a double-lip seal (DS)
- ▶ With standard seal (SS) in combination with front seal or FKM seal or seal kit
- ▶ At low mean travel speed  $v_m$
- ▶ at a raised ambient temperature
- ▶ At high loads  $F_m/C > 0.4$

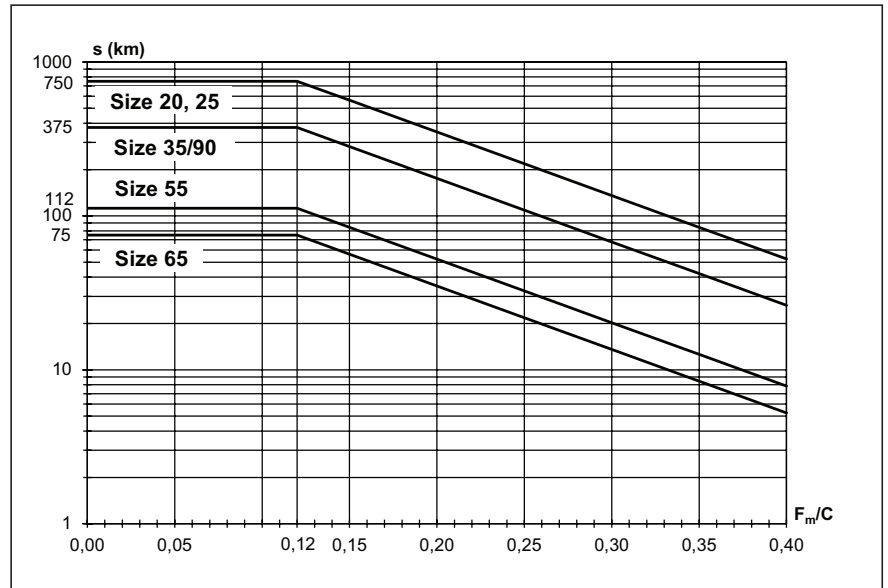


Diagram 3

#### Material number

|              |              |              |
|--------------|--------------|--------------|
| R16.. ... 10 | R16.. ... 11 | R16.. ... 60 |
|--------------|--------------|--------------|

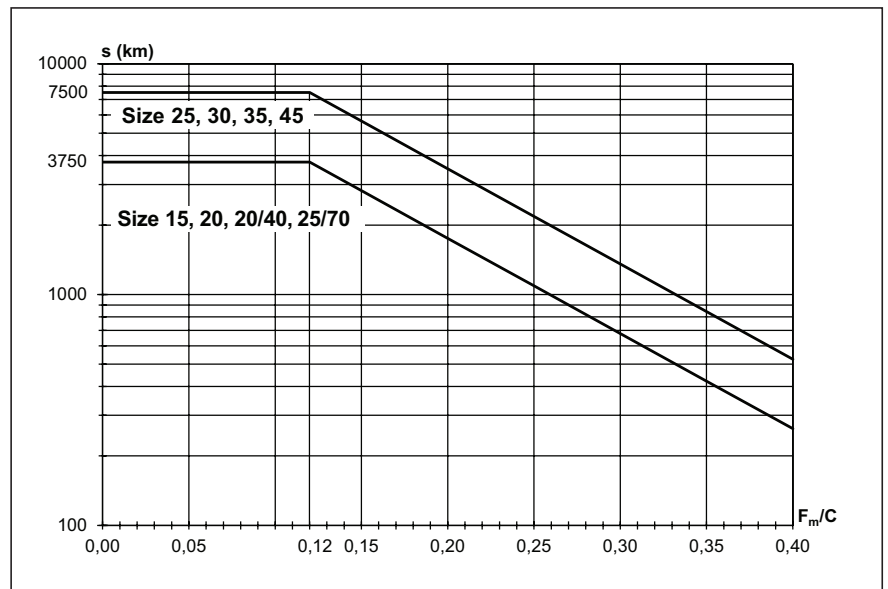


Diagram 4







#### Material number

|              |              |              |              |              |
|--------------|--------------|--------------|--------------|--------------|
| R20.. ... 04 | R16.. ... 20 | R20.. ... 30 | R16.. ... 70 | R20.. ... 90 |
| R20.. ... 05 | R16.. ... 21 | R20.. ... 31 | R16.. ... 71 |              |
| R20.. ... 06 | R16.. ... 22 | R20.. ... 32 | R16.. ... 72 |              |
| R20.. ... 07 | R16.. ... 23 | R20.. ... 33 | R16.. ... 73 |              |

⚠ Pay attention to the notes on lubrication!

# Lubrication

## Liquid grease lubrication with single-line piston distributor systems (continued)

|                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Installation position I – Normal stroke</b><br><b>Horizontal</b><br>1 lube connection, either on the left <b>or</b> on the right ball guide<br><br><b>Horizontal over head</b><br>Same connection         | <b>Installation position II – Normal stroke</b><br><b>Vertical to inclined horizontal</b><br>1 lube connection at the upper ball guide<br><br><b>Vertical to inclined over head</b><br>Same connection                                     | <b>Installation position III – Normal stroke</b><br><b>Wall mounting</b><br>1 lube connection, either on the left <b>or</b> on the right ball guide<br><br>Same connection       |
| <b>Installation position IV – short stroke</b><br><b>Horizontal</b><br>2 lube connections, 1 connection each on the left <b>and</b> right ball guide<br><br><b>Horizontal over head</b><br>Same connections | <b>Installation position V – short stroke</b><br><b>Vertical to inclined horizontal</b><br>2 lube connections, 1 connection each on the top <b>and</b> bottom ball guide<br><br><b>Vertical to inclined over head</b><br>Same connections | <b>Installation position VI – short stroke</b><br><b>Wall mounting</b><br>2 lube connections, 1 connection each on the left <b>and</b> right ball guide<br><br>Same connections |

## Smallest permissible piston distributor size for liquid grease lubrication via single-line piston distributor<sup>1)</sup>

| Material number                              |              |              |              | Installation positions                                      | Smallest permissible piston distributor size<br>(≅ minimum pulse quantity)<br>for each connection (cm <sup>3</sup> ) with liquid grease of grade NLGI 00 |      |      |      |      |      |    |      |       |       |       |
|----------------------------------------------|--------------|--------------|--------------|-------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|------|------|------|----|------|-------|-------|-------|
|                                              |              |              |              |                                                             | Size                                                                                                                                                     |      |      |      |      |      |    |      |       |       |       |
|                                              |              |              |              |                                                             | 15                                                                                                                                                       | 20   | 25   | 30   | 35   | 45   | 55 | 65   | 20/40 | 25/70 | 35/90 |
| Ball runner blocks                           |              |              |              |                                                             |                                                                                                                                                          |      |      |      |      |      |    |      |       |       |       |
| R16.. ... 10<br>R16.. ... 11<br>R16.. ... 60 |              |              |              | Horizontal I, IV<br>Vertical II, V<br>Wall mounting III, VI | 0.03                                                                                                                                                     | 0.03 | 0.03 | 0.06 | 0.10 | 0.10 | –  | 0.03 | 0.03  | –     | 0.30  |
| R20.. ... 04                                 | R16.. ... 20 | R20.. ... 30 | R16.. ... 70 | Horizontal I, IV                                            |                                                                                                                                                          |      |      |      |      |      |    |      |       |       |       |
| R20.. ... 02                                 | R16.. ... 22 | R20.. ... 32 | R16.. ... 72 | Vertical II, V                                              |                                                                                                                                                          |      |      |      |      |      |    |      |       |       |       |
| R20.. ... 05                                 | R16.. ... 21 | R20.. ... 31 | R16.. ... 71 | Wall mounting III, VI                                       | 0.03                                                                                                                                                     | 0.06 | 0.06 | 0.10 | 0.20 | 0.20 | –  | 0.06 | 0.06  | –     | –     |
| R20.. ... 06                                 | R16.. ... 22 | R20.. ... 32 | R16.. ... 72 |                                                             |                                                                                                                                                          |      |      |      |      |      |    |      |       |       |       |
| R20.. ... 0Y                                 | R16.. ... 2Y | R20.. ... 3Y | R16.. ... 7Y |                                                             |                                                                                                                                                          |      |      |      |      |      |    |      |       |       |       |
| R20.. ... 07                                 | R16.. ... 23 | R20.. ... 33 | R16.. ... 73 |                                                             |                                                                                                                                                          |      |      |      |      |      |    |      |       |       |       |
|                                              |              | R20.. ... 90 |              |                                                             |                                                                                                                                                          |      |      |      |      |      |    |      |       |       |       |

Table 9

1) This applies to the following conditions:

- Liquid grease Dynalub 520 (alternatively Castrol Tribol GR 100-00 PD or Elkalube GLS 135/N00) and piston distributors from SKF
- Lubrication channels must be filled
- Ambient temperature T = 10 – 40 °C

## Oil lubrication with single-line piston distributor systems

⚠ Observe chapter "Note on lubrication"

Lubricant oil: We recommend **Shell Tonna S3 M220**. For further information, please refer to chapter "Note on lubrication".

⚠ Never put ball runner blocks into operation without basic lubrication. No initial lubrication is required if pre-lubricated at the factory. Rexroth ball rail systems are supplied with preservation.

### Initial lubrication of the ball runner blocks (basic lubrication)

**Stroke  $\geq 2 \cdot$  ball runner block length  $B_1$  (normal stroke)**

- One lube connection per ball runner block, attach optionally on the left **or** right ball guide and lubricate!

The initial lubrication is done two times with the partial amount according to table 10:

1. Oil the ball runner block with the initial partial amount according to table 10.
2. Move ball runner blocks with three double strokes of  $3 \cdot$  ball runner block length  $B_1$ .
3. Repeat steps 1 and 2 once.
4. Check whether a film of grease is visible on the ball guide rail.

### Stroke $< 2 \cdot$ ball runner block length $B_1$ (short stroke)

- Two lube connections per ball runner block, attach one connection on the left **and** right ball guide and lubricate!

The initial lubrication is done two times for each connection with the partial amount according to table 11:

1. Oil the ball runner block for each connection with the initial partial amount according to table 11.
2. Move ball runner blocks with three double strokes of  $3 \cdot$  ball runner block length  $B_1$ .
3. Repeat steps 1 and 2 once.
4. Check whether a film of grease is visible on the ball guide rail.

| Size  | Initial lubrication (normal stroke) |                 |                            |                 |                 |
|-------|-------------------------------------|-----------------|----------------------------|-----------------|-----------------|
|       | Material numbers (not exhaustive)   |                 |                            |                 |                 |
|       | (no initial lubrication)            |                 | (with initial lubrication) |                 |                 |
|       | R16.. ... 10                        | R20.. ... 04/0Z | R16.. ... 20/2Z            | R20.. ... 30/3Z | R16.. ... 70/7Z |
|       | R16.. ... 11                        | R20.. ... 05    | R16.. ... 21               | R20.. ... 31    | R16.. ... 71    |
|       | R16.. ... 60                        | R20.. ... 06/0Y | R16.. ... 22/2Y            | R20.. ... 32/3Y | R16.. ... 72/7Y |
|       |                                     | R20.. ... 07    | R16.. ... 23               | R20.. ... 33    | R16.. ... 73    |
|       |                                     |                 | R20.. ... 90               |                 |                 |
|       | Partial amount (cm <sup>3</sup> )   |                 |                            |                 |                 |
| 15    | 0.4 (2x)                            |                 |                            |                 |                 |
| 20    | 0.7 (2x)                            |                 |                            |                 |                 |
| 25    | 1.0 (2x)                            |                 |                            |                 |                 |
| 30    | 1.1 (2x)                            |                 |                            |                 |                 |
| 35    | 1.2 (2x)                            |                 |                            |                 |                 |
| 45    | –                                   |                 |                            |                 |                 |
| 55    | 3.6 (2x)                            |                 |                            |                 |                 |
| 65    | 6.0 (2x)                            |                 |                            |                 |                 |
| 20/40 | –                                   |                 |                            |                 |                 |
| 25/70 | –                                   |                 |                            |                 |                 |
| 35/90 | 1.8 (2x)                            |                 |                            |                 |                 |

Table 10

| Size  | Initial lubrication (short stroke)               |                                 |                                                        |                                                 |                                 |
|-------|--------------------------------------------------|---------------------------------|--------------------------------------------------------|-------------------------------------------------|---------------------------------|
|       | Material numbers (not exhaustive)                |                                 |                                                        |                                                 |                                 |
|       | (no initial lubrication)                         |                                 | (with initial lubrication)                             |                                                 |                                 |
|       | R16.. ... 10                                     | R20.. ... 04/0Z                 | R16.. ... 20/2Z                                        | R20.. ... 30/3Z                                 | R16.. ... 70/7Z                 |
|       | R16.. ... 11                                     | R20.. ... 05                    | R16.. ... 21                                           | R20.. ... 31                                    | R16.. ... 71                    |
|       | R16.. ... 60                                     | R20.. ... 06/0Y<br>R20.. ... 07 | R16.. ... 22/2Y<br>R16.. ... 23                        | R20.. ... 32/3Y<br>R20.. ... 33<br>R20.. ... 90 | R16.. ... 72/7Y<br>R16.. ... 73 |
|       | Partial amount per connection (cm <sup>3</sup> ) |                                 |                                                        |                                                 |                                 |
|       | left                                             | right                           |                                                        |                                                 |                                 |
| 15    | 0.4 (2x)                                         | 0.4 (2x)                        | Initial lubrication in the factory with<br>Dynalub 510 |                                                 |                                 |
| 20    | 0.7 (2x)                                         | 0.7 (2x)                        |                                                        |                                                 |                                 |
| 25    | 1.0 (2x)                                         | 1.0 (2x)                        |                                                        |                                                 |                                 |
| 30    | 1.1 (2x)                                         | 1.1 (2x)                        |                                                        |                                                 |                                 |
| 35    | 1.2 (2x)                                         | 1.2 (2x)                        |                                                        |                                                 |                                 |
| 45    | –                                                |                                 | –                                                      |                                                 |                                 |
| 55    | 3.6 (2x)                                         | 3.6 (2x)                        |                                                        |                                                 |                                 |
| 65    | 6.0 (2x)                                         | 6.0 (2x)                        |                                                        |                                                 |                                 |
| 20/40 | –                                                |                                 | Initial lubrication in the factory with<br>Dynalub 510 |                                                 |                                 |
| 25/70 |                                                  |                                 |                                                        |                                                 |                                 |
| 35/90 | 1.8 (2x)                                         | 1.8 (2x)                        | –                                                      |                                                 |                                 |

Table 11

# Lubrication

## Oil lubrication with single-line piston distributor systems (continued)

### Relubrication of the ball runner blocks

#### Stroke $\geq 2 \cdot$ ball runner block length $B_1$ (normal stroke)

- If the relubrication interval according to diagram 5 or 6 has been reached, relubricate the amount stated in table 12.

#### Note

The number of pulses required is the integer quotient of the minimum relubrication amount as per table 12 and the smallest permissible piston distributor size ( $\hat{=}$  minimum pulse quantity) according to table 14.

The smallest permissible piston distributor size also depends on the installation position. The lubricating cycle time is the result of dividing the lubrication interval by the determined pulse count (see configuration example).

| Size  | Relubrication (normal stroke)     |                 |                 |                                   |                 |  |
|-------|-----------------------------------|-----------------|-----------------|-----------------------------------|-----------------|--|
|       | Material numbers (not exhaustive) |                 |                 |                                   |                 |  |
|       | R16.. ... 10                      | R20.. ... 04/0Z | R16.. ... 20/2Z | R20.. ... 30/3Z                   | R16.. ... 70/7Z |  |
|       | R16.. ... 11                      | R20.. ... 05    | R16.. ... 21    | R20.. ... 31                      | R16.. ... 71    |  |
|       | R16.. ... 60                      | R20.. ... 06/0Y | R16.. ... 22/2Y | R20.. ... 32/3Y                   | R16.. ... 72/7Y |  |
|       |                                   | R20.. ... 07    | R16.. ... 23    | R20.. ... 33                      | R16.. ... 73    |  |
|       | Partial amount (cm <sup>3</sup> ) |                 |                 | Partial amount (cm <sup>3</sup> ) |                 |  |
| 15    | 0.4 (1x)                          |                 |                 | 0.4 (1x)                          |                 |  |
| 20    | 0.7 (1x)                          |                 |                 | 0.7 (1x)                          |                 |  |
| 25    | 1.0 (1x)                          |                 |                 | 1.0 (1x)                          |                 |  |
| 30    | 1.1 (1x)                          |                 |                 | 1.1 (1x)                          |                 |  |
| 35    | 1.2 (1x)                          |                 |                 | 1.2 (1x)                          |                 |  |
| 45    | –                                 |                 |                 | 2.2 (1x)                          |                 |  |
| 55    | 3.6 (1x)                          |                 |                 | –                                 |                 |  |
| 65    | 6.0 (1x)                          |                 |                 | –                                 |                 |  |
| 20/40 | –                                 |                 |                 | 0.7 (1x)                          |                 |  |
| 25/70 | –                                 |                 |                 | 1.1 (1x)                          |                 |  |
| 35/90 | 1.8 (1x)                          |                 |                 | –                                 |                 |  |

Table 12

#### Stroke $< 2 \cdot$ ball runner block length $B_1$ (short stroke)

- When the relubrication interval according to diagram 5 or 6 is reached, apply the relubrication quantity according to table 13 **per** lube connection.
- The number of pulses required and the lubrication cycle are to be determined in a similar way as the relubrication (normal stroke).
- For each lubrication cycle, the ball runner block should be moved with a double stroke of 3 ball runner block length  $B_1$ ; as minimum stroke, however, ball runner block length  $B_1$  should be moved.

 Pay attention to the notes on lubrication!

| Size  | Relubrication (short stroke)                     |                 |                 |                                                  |                 |  |
|-------|--------------------------------------------------|-----------------|-----------------|--------------------------------------------------|-----------------|--|
|       | Material numbers (not exhaustive)                |                 |                 |                                                  |                 |  |
|       | R16.. ... 10                                     | R20.. ... 04/0Z | R16.. ... 20/2Z | R20.. ... 30/3Z                                  | R16.. ... 70/7Z |  |
|       | R16.. ... 11                                     | R20.. ... 05    | R16.. ... 21    | R20.. ... 31                                     | R16.. ... 71    |  |
|       | R16.. ... 60                                     | R20.. ... 06/0Y | R16.. ... 22/2Y | R20.. ... 32/3Y                                  | R16.. ... 72/7Y |  |
|       |                                                  | R20.. ... 07    | R16.. ... 23    | R20.. ... 33                                     | R16.. ... 73    |  |
|       | Partial amount per connection (cm <sup>3</sup> ) |                 |                 | Partial amount per connection (cm <sup>3</sup> ) |                 |  |
|       | left                                             | right           |                 | left                                             | right           |  |
| 15    | 0.4 (1x)                                         | 0.4 (1x)        |                 | 0.4 (1x)                                         | 0.4 (1x)        |  |
| 20    | 0.7 (1x)                                         | 0.7 (1x)        |                 | 0.7 (1x)                                         | 0.7 (1x)        |  |
| 25    | 1.0 (1x)                                         | 1.0 (1x)        |                 | 1.0 (1x)                                         | 1.0 (1x)        |  |
| 30    | 1.1 (1x)                                         | 1.1 (1x)        |                 | 1.1 (1x)                                         | 1.1 (1x)        |  |
| 35    | 1.2 (1x)                                         | 1.2 (1x)        |                 | 1.2 (1x)                                         | 1.2 (1x)        |  |
| 45    | –                                                |                 |                 | 2.2 (1x)                                         | 2.2 (1x)        |  |
| 55    | 3.6 (1x)                                         | 3.6 (1x)        |                 | –                                                |                 |  |
| 65    | 6.0 (1x)                                         | 6.0 (1x)        |                 | –                                                |                 |  |
| 20/40 | –                                                |                 |                 | 0.7 (1x)                                         | 0.7 (1x)        |  |
| 25/70 | –                                                |                 |                 | 1.1 (1x)                                         | 1.1 (1x)        |  |
| 35/90 | 1.8 (1x)                                         | 1.8 (1x)        |                 | –                                                |                 |  |

Table 13

## Oil lubrication with single-line piston distributor systems (continued)

### Load-dependent relubrication intervals for oil lubrication via single-line piston distributor systems ("dry axes")

#### This applies to the following conditions:

- ▶ Lubricant oil Shell Tonna S3 M220
- ▶ No media pressurization
- ▶ Standard seals (SS)
- ▶ Ambient temperature:  
 $T = 10 - 40\text{ °C}$

#### Key

|         |                                           |      |
|---------|-------------------------------------------|------|
| $C$     | = Dynamic load capacity                   | (N)  |
| $F_m$   | = Dynamically equivalent load on bearing  | (N)  |
| $F_m/C$ | = Load ratio                              | (-)  |
| $s$     | = Lubrication interval as travel distance | (km) |

#### For relubrication intervals, please consult us:

- ▶ In case of exposure to cooling lubricants
- ▶ In case of exposure to dust (wood, paper,...)
- ▶ With use of a double-lip seal (DS)
- ▶ With standard seal (SS) in combination with front seal or FKM seal or seal kit
- ▶ At low mean travel speed  $v_m$
- ▶ at a raised ambient temperature
- ▶ At high loads  $F_m/C > 0.4$

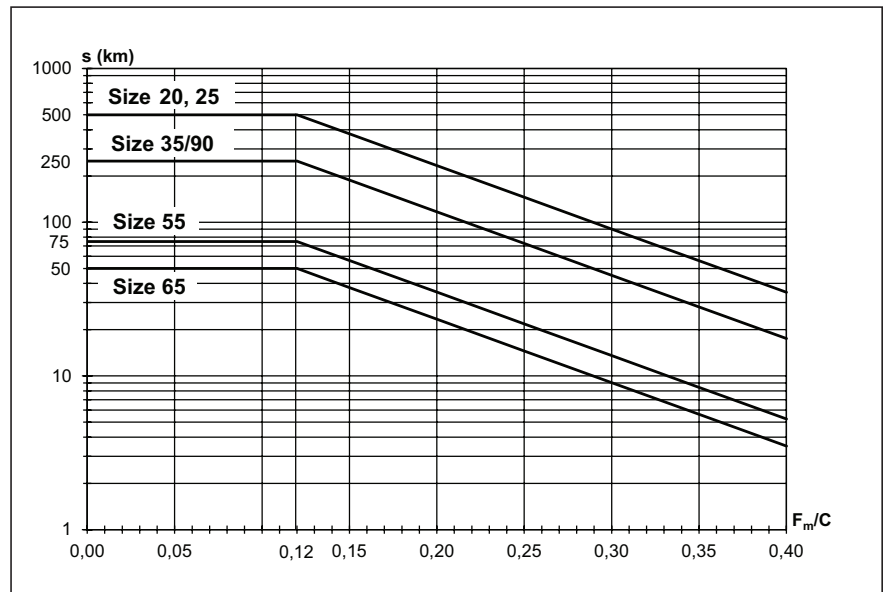


Diagram 5

| Material number |              |              |
|-----------------|--------------|--------------|
| R16.. ... 10    | R16.. ... 11 | R16.. ... 60 |

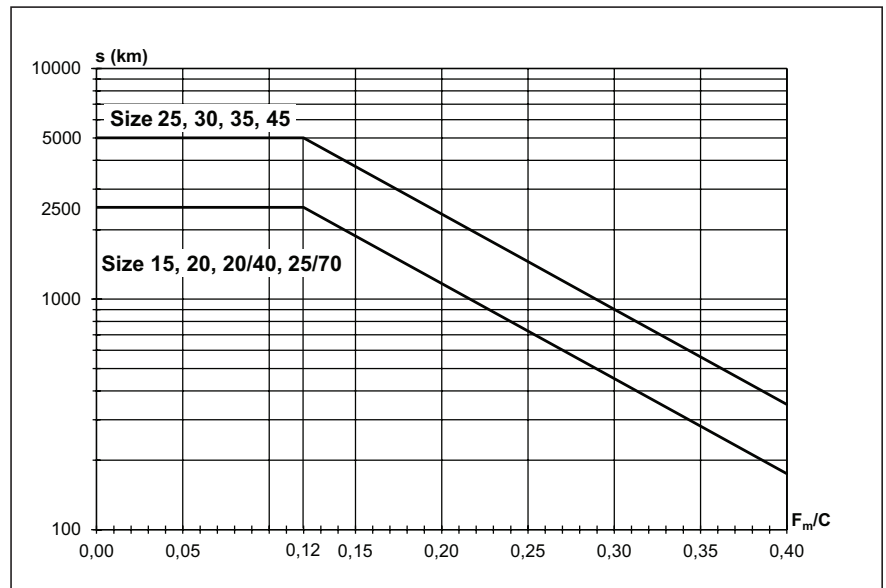








Diagram 6

| Material number |              |              |              |              |
|-----------------|--------------|--------------|--------------|--------------|
| R20.. ... 04    | R16.. ... 20 | R20.. ... 30 | R16.. ... 70 | R20.. ... 90 |
| R20.. ... 05    | R16.. ... 21 | R20.. ... 31 | R16.. ... 71 |              |
| R20.. ... 06    | R16.. ... 22 | R20.. ... 32 | R16.. ... 72 |              |
| R20.. ... 07    | R16.. ... 23 | R20.. ... 33 | R16.. ... 73 |              |

**⚠** Pay attention to the notes on lubrication!

# Lubrication

## Oil lubrication with single-line piston distributor systems (continued)

|                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Installation position I – Normal stroke</b><br><b>Horizontal</b><br>1 lube connection, either on the left <b>or</b> on the right ball guide<br><br><b>Horizontal over head</b><br>Same connection         | <b>Installation position II – Normal stroke</b><br><b>Vertical to inclined horizontal</b><br>1 lube connection at the upper ball guide<br><br><b>Vertical to inclined over head</b><br>Same connection                                     | <b>Installation position III – Normal stroke</b><br><b>Wall mounting</b><br>1 lube connection, either on the left <b>or</b> on the right ball guide<br><br>Same connection       |
| <b>Installation position IV – short stroke</b><br><b>Horizontal</b><br>2 lube connections, 1 connection each on the left <b>and</b> right ball guide<br><br><b>Horizontal over head</b><br>Same connections | <b>Installation position V – short stroke</b><br><b>Vertical to inclined horizontal</b><br>2 lube connections, 1 connection each on the top <b>and</b> bottom ball guide<br><br><b>Vertical to inclined over head</b><br>Same connections | <b>Installation position VI – short stroke</b><br><b>Wall mounting</b><br>2 lube connections, 1 connection each on the left <b>and</b> right ball guide<br><br>Same connections |

## Smallest permissible piston distributor size for oil lubrication via single-line piston distributor<sup>1)</sup>

| Ball runner blocks |              |              |              | Smallest permissible piston distributor size<br>(≠ minimum pulse quantity)<br>for each connection (cm <sup>3</sup> ) with oil viscosity of 220 m <sup>2</sup> /s |      |      |      |      |      |      |      |      |      |       |       |       |
|--------------------|--------------|--------------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|------|------|------|------|------|------|------|-------|-------|-------|
| Material number    |              |              |              | Installation positions                                                                                                                                           | Size | 15   | 20   | 25   | 30   | 35   | 45   | 55   | 65   | 20/40 | 25/70 | 35/90 |
| R16.. ... 10       |              |              |              | Horizontal I, IV                                                                                                                                                 | –    | 0.60 |      | –    |      |      | 1.50 |      | –    |       | 0.60  |       |
| R16.. ... 11       |              |              |              | Vertical II, V                                                                                                                                                   |      |      |      |      |      |      |      |      |      |       |       |       |
| R16.. ... 60       |              |              |              | Wall mounting III, VI                                                                                                                                            |      |      |      |      |      |      |      |      |      |       |       |       |
| R20.. ... 04       | R16.. ... 20 | R20.. ... 30 | R16.. ... 70 | Horizontal I, IV                                                                                                                                                 | 0.03 | 0.03 | 0.03 | 0.06 | 0.10 | 0.10 | –    | 0.03 | 0.03 | –     | –     | –     |
| R20.. ... 0Z       | R16.. ... 2Z | R20.. ... 3Z | R16.. ... 7Z | Vertical II, V                                                                                                                                                   |      |      |      |      |      |      |      |      |      |       |       |       |
| R20.. ... 05       | R16.. ... 21 | R20.. ... 31 | R16.. ... 71 | Wall mounting III, VI                                                                                                                                            |      |      |      |      |      |      |      |      |      |       |       |       |
| R20.. ... 06       | R16.. ... 22 | R20.. ... 32 | R16.. ... 72 |                                                                                                                                                                  |      |      |      |      |      |      |      |      |      |       |       |       |
| R20.. ... 0Y       | R16.. ... 2Y | R20.. ... 3Y | R16.. ... 7Y |                                                                                                                                                                  |      |      |      |      |      |      |      |      |      |       |       |       |
| R20.. ... 07       | R16.. ... 23 | R20.. ... 33 | R16.. ... 73 |                                                                                                                                                                  |      |      |      |      |      |      |      |      |      |       |       |       |
|                    |              | R20.. ... 90 |              |                                                                                                                                                                  |      |      |      |      |      |      |      |      |      |       |       |       |

Table 14

1) This applies to the following conditions:

- Lubricant oil Shell Tonna S3 M 220 and piston distributor from SKF
- Lubrication channels must be filled
- Ambient temperature T = 10 – 40 °C

## Configuration example of lubrication of a typical 2-axes application using central lubrication

### X-axis

| Component or characteristic value             | Specifications                                                                       |
|-----------------------------------------------|--------------------------------------------------------------------------------------|
| <b>Ball runner blocks</b>                     | Size 35, 4 pieces, C = 51,800 N, material numbers: R1651 323 20                      |
| <b>Ball guide rail</b>                        | Size 35, 2 pieces, L = 1,500 mm; material numbers: R1605 333 61                      |
| <b>Dynamically equivalent load on bearing</b> | $F_m = 12,570$ N (per ball runner block) with consideration of the preload (here C2) |
| <b>Stroke</b>                                 | 500 mm                                                                               |
| <b>Average speed</b>                          | $v_m = 1$ m/s                                                                        |
| <b>Temperature</b>                            | 20 – 30 °C                                                                           |
| <b>Installation position</b>                  | Horizontal                                                                           |
| <b>Lubrication</b>                            | Single-line distributor system for all axes with liquid grease Dynalub 520           |
| <b>Exposure to contaminants</b>               | No exposure to media, chips, dust                                                    |

### Configuration sizes

1. Normal stroke or short stroke?

### Configuration (for each ball runner block)

Normal stroke:  
 $\text{Stroke} \geq 2 \cdot \text{ball runner block length } B_1$   
 $500 \text{ mm} \geq 2 \cdot 77 \text{ mm}$   
 $500 \text{ mm} \geq 154 \text{ mm!}$   
i.e. normal stroke applies!

### Sources of information

► Normal stroke formula,  
ball runner block length  $B_1$

2. Initial lubrication amount

1 lube connection, initial lubrication  
quantity: Pre-lubricated at the factory  
with Dynalub 510

► Initial lubrication amount from table 5

3. Relubrication quantity

1 lube connection, relubrication quantity:  
 $2.2 \text{ cm}^3$  (2x)

► Relubrication amount from table 7

4. Installation position

Installation position I – Normal stroke  
(horizontal)

► Installation position from overview

5. Piston distributor size

Permissible piston distributor size:  
 $0.1 \text{ cm}^3$

► Piston distributor size from table 9  
size 35, installation position I  
(horizontal)

6. Number of pulses

$$\text{Number of pulses} = \frac{2 \cdot 2.2 \text{ cm}^3}{0.1 \text{ cm}^3} = 44$$

$$\text{Number of pulses} = \frac{\text{Number} \cdot \text{relubrication quantity}}{\text{Permissible piston distributor size}}$$

7. Load ratio

$$\text{Load ratio} = \frac{12\,570 \text{ N}}{51\,800 \text{ N}} = 0.24$$

► Load ratio =  $F_m/C$   
 $F_m$  and C from specifications

8. Relubrication interval

Relubrication interval: 2 150 km

► Relubrication interval from diagram 4:  
Curve size 35 with load ratio of 0.24

9. Lubrication cycle

$$\text{Lubrication cycle} = \frac{2\,150 \text{ km}}{44} = 48$$

$$\text{Lubrication cycle} = \frac{\text{Relubrication interval}}{\text{Number of pulses}}$$

### Interim result (X-axis)

For the x-axis, for each ball runner block,  
a minimum quantity of  $0.1 \text{ cm}^3$  of Dynalub  
520 is to be supplied every 48 km.

Lubrication

Y-axis

| Component or characteristic value      | Specifications                                                                             |
|----------------------------------------|--------------------------------------------------------------------------------------------|
| Ball runner blocks                     | Size 25, 4 pieces, C = 28600 N, material numbers: R1651 223 20                             |
| Ball guide rail                        | Size 25, 2 pieces, L = 1000 mm; material numbers: R1605 232 31                             |
| Dynamically equivalent load on bearing | $F_m = 3,420\text{ N}$ (per ball runner block) with consideration of the preload (here C2) |
| Stroke                                 | 50 mm (short stroke)                                                                       |
| Average speed                          | $v_m = 1\text{ m/s}$                                                                       |
| Temperature                            | 20 – 30 °C                                                                                 |
| Installation position                  | Vertical                                                                                   |
| Lubrication                            | Single-line distributor system for all axes with liquid grease Dynalub 520                 |
| Exposure to contaminants               | No exposure to media, chips, dust                                                          |

Configuration sizes

1. Normal stroke or short stroke?

Configuration (for each ball runner block)

Normal stroke:  
Stroke  $\geq 2 \cdot$  ball runner block length  $B_1$   
50 mm  $\geq 2 \cdot 57.8\text{ mm}$   
50 mm  $< 115.6\text{ mm!}$   
i.e. short stroke applies!

Sources of information

► Normal stroke formula, ball runner block length  $B_1$

2. Initial lubrication amount

2 lube connections, initial lubrication quantity for each connection: pre-lubricated at the factory with Dynalub 510

► Initial lubrication amount from table 6

3. Relubrication quantity

2 lube connections, relubrication quantity for each connection: 1.4 cm<sup>3</sup> (2x)

► Relubrication amount from table 8

4. Installation position

Installation position V - short stroke (vertical to inclined horizontal)

► Installation position from overview

5. Piston distributor size

Permissible piston distributor size: 0.03 cm<sup>3</sup>

► Piston distributor size from table 9, size 25, mounting position V (vertical to inclined horizontal)

6. Number of pulses

$$\text{Number of pulses} = \frac{2 \cdot 1.4\text{ cm}^3}{0.03\text{ cm}^3} = 94$$

$$\text{Number of pulses} = \frac{\text{Number} \cdot \text{relubrication quantity}}{\text{Permissible piston distributor size}}$$

7. Load ratio

$$\text{Load ratio} = \frac{3\,420\text{ N}}{28\,600\text{ N}} = 0.12$$

► Load ratio =  $F_m/C$   
 $F_m$  and C from specifications

8. Relubrication interval

Relubrication interval: 7 500 km

► Relubrication interval from diagram 4: Curve size 25 with load ratio of 0.12

9. Lubrication cycle

$$\text{Lubrication cycle} = \frac{7\,500\text{ km}}{94} = 80\text{ km}$$

$$\text{Lubrication cycle} = \frac{\text{Relubrication interval}}{\text{Number of pulses}}$$

Interim result  
(Y-axis)

For the y-axis, for each ball runner block and each lube connection, a minimum quantity of 0.03 cm<sup>3</sup> of Dynalub 520 is to be supplied every 80 km.

Final result  
(two-axes lubrication)

Since, in this example, both axes are to be supplied by a single-line distributor system, the x-axis with its smaller lubrication cycle (48 km) determines the total lubrication cycle of the system, i.e. the y-axis is lubricated every 48 km as well.

**The number of connections and minimum quantities determined for each individual axis remain valid.**



### Lubrication from above without lubrication adapter

For all ball runner blocks with preparation for lubrication from above.

(Exceptions: Ball runner block high SNH R1621 and SLH R1624)

In the groove for the o-ring, another small groove (1) is pre-fitted. Do not open this with a drill.

Risk of contamination!

1. Heat up a metal tip (2) with a diameter of 0.8 mm.
2. Carefully open and pierce the groove (1) with the metal tip.  
Observe the maximum permissible depth  $T_{max}$  according to the table!
3. Insert the o-ring (3) into the groove (the o-ring is not included in the scope of delivery of the ball runner block. Ball runner block accessories)

### With lubrication adapter


(Ball runner block accessories)

A lubrication adapter is necessary for high ball runner blocks if lubrication is to be carried out from the carriage.


In the groove for the o-ring, another small groove (1) is pre-fitted. Do not open this with a drill.

Risk of contamination!

1. Heat up a metal tip (2) with a diameter of 0.8 mm.
2. Carefully open and pierce the groove (1) with the metal tip.  
Observe the maximum permissible depth  $T_{max}$  according to the table!
3. Insert the o-ring (3) into the groove (the o-ring is not included in the scope of delivery of the lubrication adapter).
4. Insert the lubrication adapter at a slant into the groove and press the straight side (4) against the steel part (5).  
Use grease to fix the adapter in place.
5. Insert the o-ring (6) into the lubrication adapter (the o-ring is not included in the scope of delivery of the lubrication adapter).

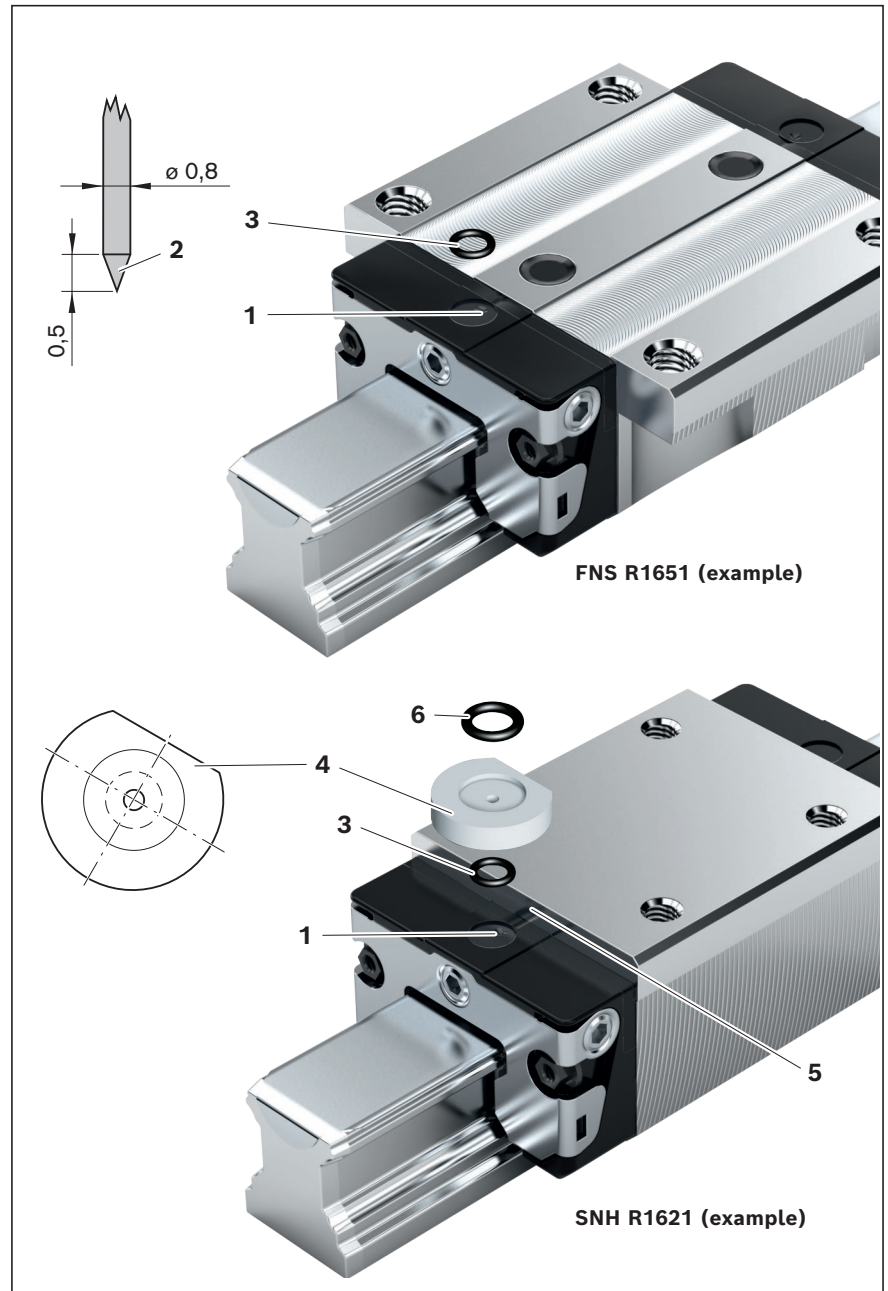

| Size  | Lubrication opening, top:<br>Maximum permissible depth<br>for piercing $T_{max}$ (mm) |                          |
|-------|---------------------------------------------------------------------------------------|--------------------------|
|       | Ball runner<br>block standard<br>height/high                                          | Ball runner<br>block low |
| 15    | 3.6                                                                                   | —                        |
| 20    | 3.9                                                                                   | 4.4                      |
| 25    | 3.3                                                                                   | 4.9                      |
| 30    | 6.6                                                                                   | —                        |
| 35    | 7.5                                                                                   | —                        |
| 45    | 8.8                                                                                   | —                        |
| 20/40 | 4.0                                                                                   | —                        |
| 25/70 | 2.1                                                                                   | —                        |
| 35/90 | 7.9                                                                                   | —                        |

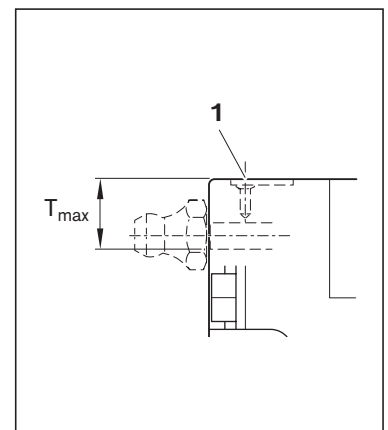

# Maintenance

## **Cleaning cycle**

Dirt can settle and encrust on ball guide rails, especially when these are not enclosed. To ensure that seals and cover strips retain their functionality, this contamination must be removed at regular intervals.

It is advisable to perform at least one full cleaning cycle over the entire travel range at least twice a day or every 8 hours at the latest.

Before shutting down the machine, always perform a cleaning cycle.

Shorter maintenance intervals in case of exposure to cooling lubricants.

## **Maintenance of accessories**


All accessories used for scraping the ball guide rail shall be subject to regular maintenance.

In environments with heavy contamination, it is advisable to replace all the parts directly exposed to such contamination.


We recommend annual maintenance.

**Bosch Rexroth Linear Motion Technology homepage**

<https://www.boschrexroth.com/web/a74aa994-0afe-4a3b-9e3f-3e615572d31a>

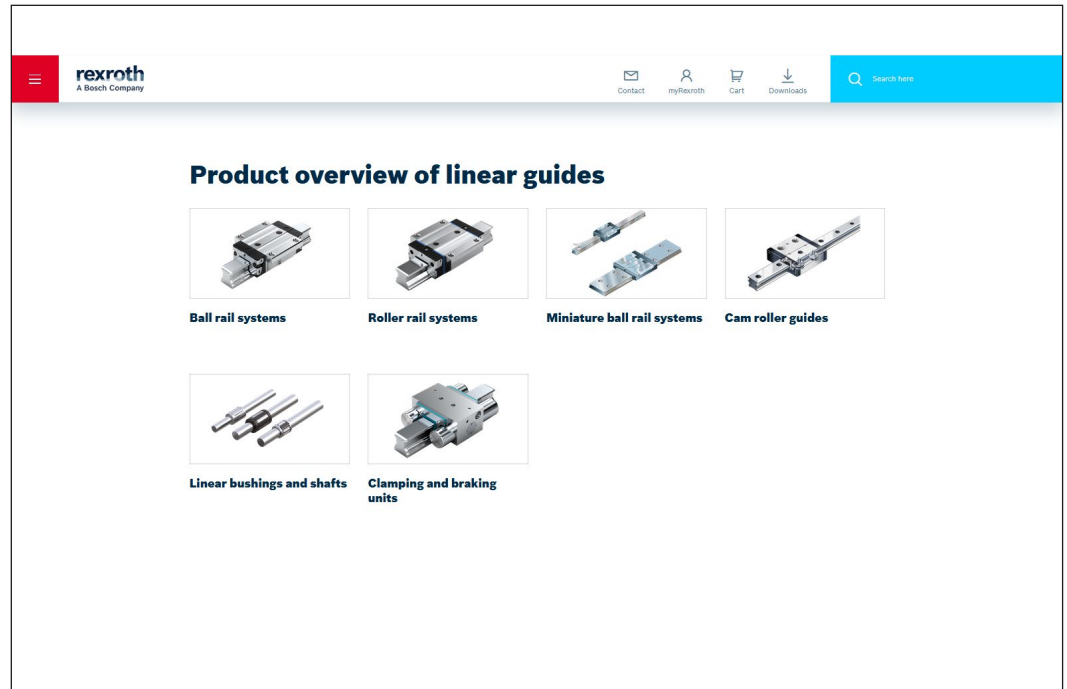
**Linear Motion Designer calculation tool**

[www.boschrexroth.com/lmd](http://www.boschrexroth.com/lmd)

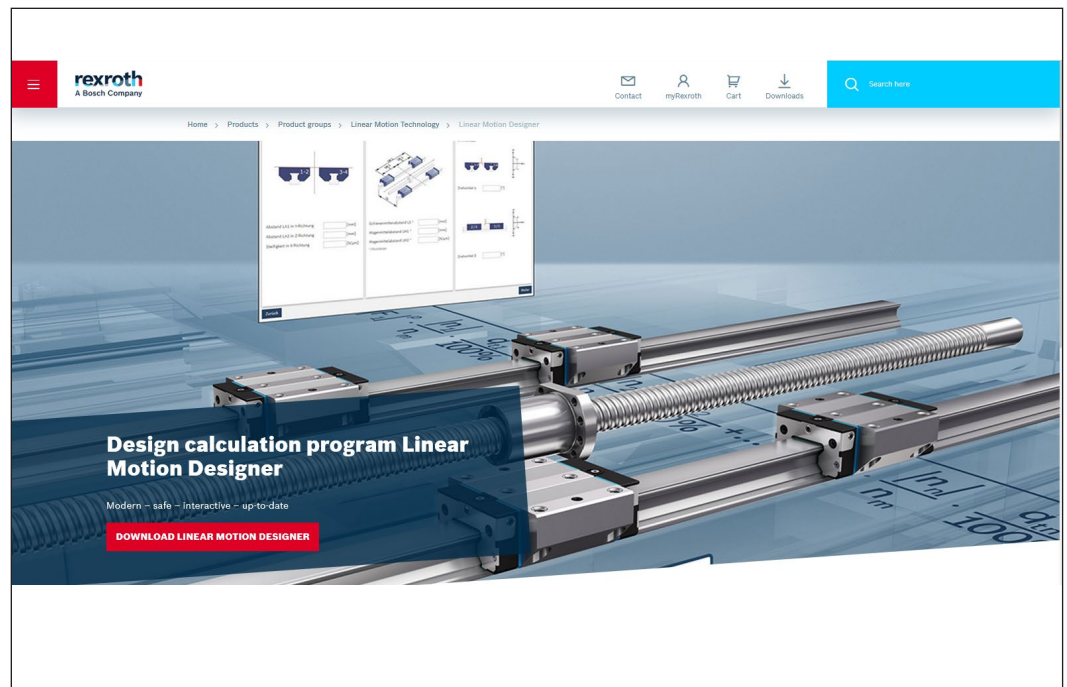


**How-to: Linear Motion Technology**

<https://www.youtube.com/playlist?list=PLRO3LeFQeLyNYHTLzi-PeoiuRTpNREvVZ>

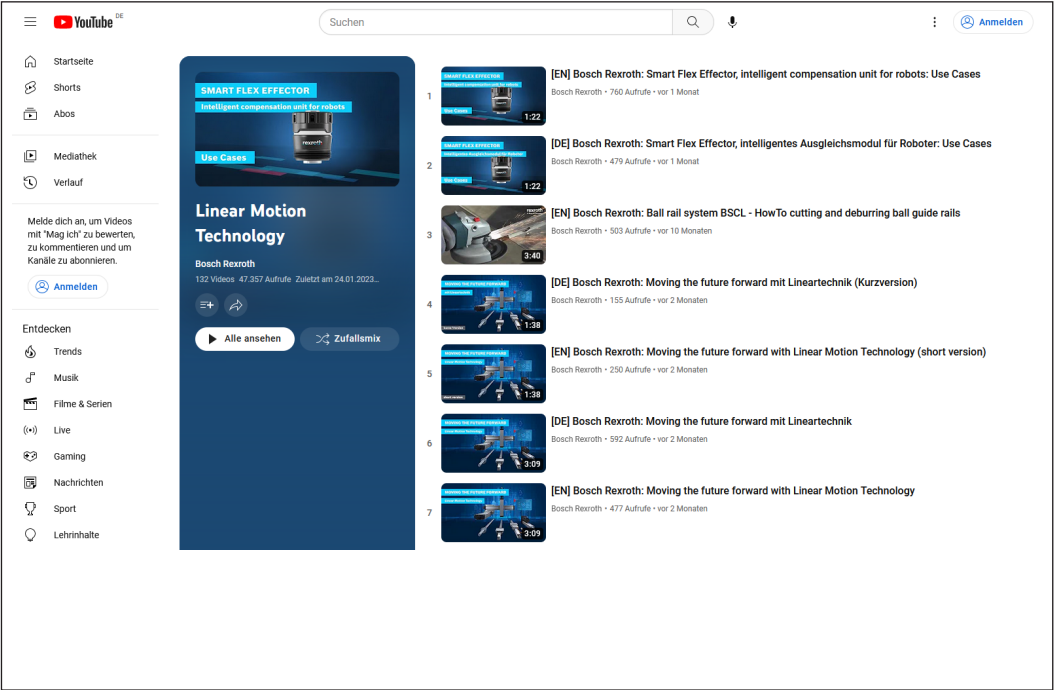


**Academy**

<https://www.boschrexroth.com/de/de/academy/>

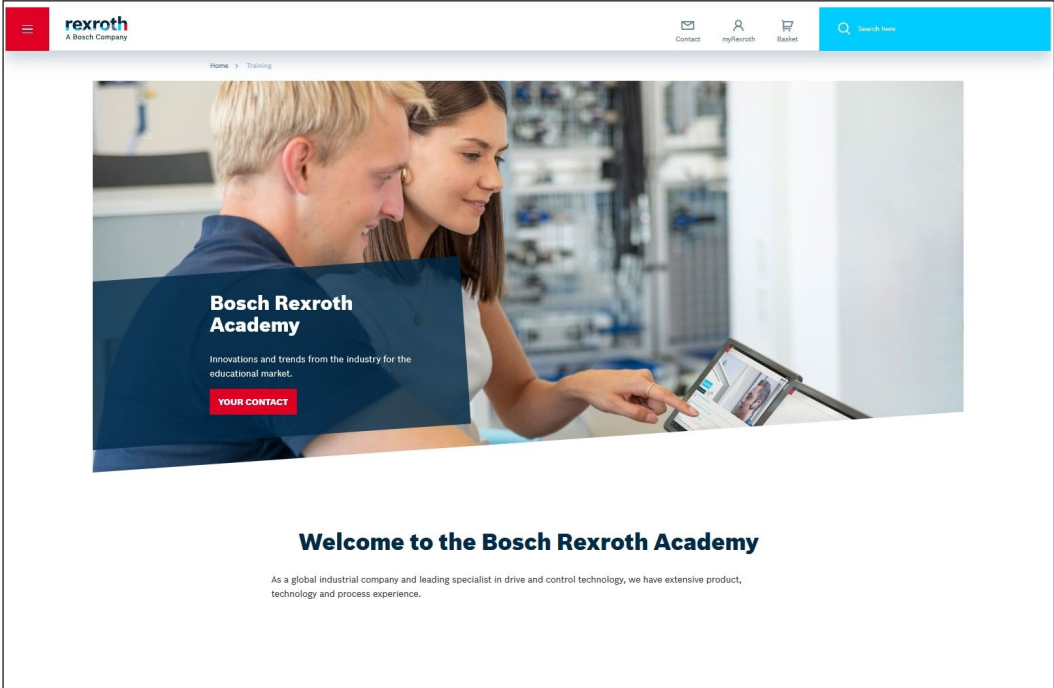


**Service**

<https://www.boschrexroth.com/de/de/service/>

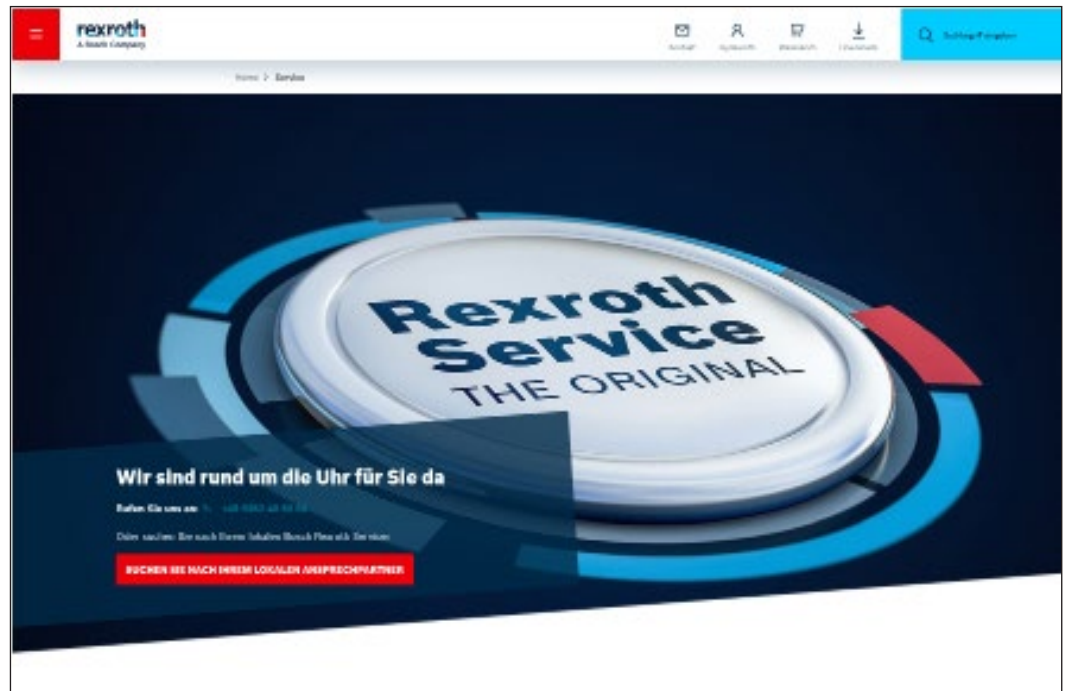**Rexroth Store**

<https://store.boschrexroth.com/>

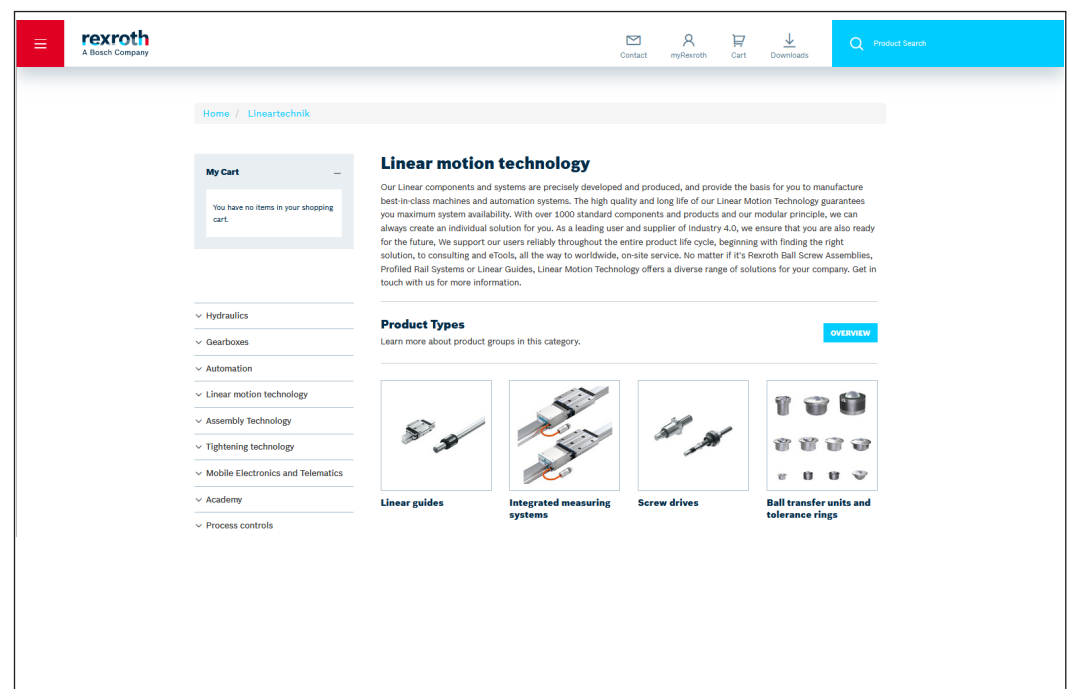

**Bosch Rexroth AG**

Ernst-Sachs-Straße 100  
97424 Schweinfurt, Germany  
Tel. +49 9721 937-0  
Fax +49 9721 937-275  
[www.boschrexroth.com](http://www.boschrexroth.com)

**Find your local contact person here:**

[www.boschrexroth.com/contact](http://www.boschrexroth.com/contact)

